



novaPDF SDK

User Manual

novaPDF SDK User Manual

for novaPDF 10 SDK Developer version 10

by Softland

This documentation contains proprietary information of Softland.

All rights reserved. No part of this documentation shall be reproduced, stored in a retrieval system or transmitted by any means, electronic, mechanical, photocopying, recoding, or otherwise, without permission from Softland. No patent liability is assumed with respect to the use of the information contained herein.

The information in this document is subject to change without notice. Although every precaution has been taken in the preparation of this book, Softland assumes no responsibility for errors and omissions. Nor is any liability assumed for damages resulting from the information contained herein.

Windows ® is a registered trademark of the Microsoft Corporation. All other products or company names in this document are used for identification purposes only, and may be trademarks of their respective owners.

Table of Contents

Part I novaPDF SDK	11
1 Introduction.....	11
2 Overview.....	11
Installation	11
System requirements	12
Components	12
Network use	14
Multiple printers	15
3 Integration.....	16
How to integrate	16
How to make the release build	16
Customize your setup	18
Co-Branding Tool	18
Folders	18
Files	18
Settings	20
Add/Modify Printer	20
General	20
Profile	21
Page defaults.....	21
Other defaults.....	21
Permissions	22
Results	22
Build an installation package bundle	23
Installation package bundle	24
4 novaPDF COM.....	27
How to register COM	27
How to use the COM	28
How to set printer options	28
Private and public profiles	29
How to register for messages	29
How to use events	30
Multithreading applications	30
Use temporary printers	31
Working with Layout	32
Working with Actions	32
Reference	33
Profile option strings.....	33
Windows messages.....	60
What is INovaPdfOptions.....	62
INovaPdfOptions.....	68
AddAction	68
AddAction2	69
AddBookmarkDefinition	69
AddBookmarkDefinition2.....	71
AddCustomProperty	72

AddCustomProperty2	73
AddNovaPrinter	73
AddNovaPrinter2	74
AddNovaPrinterExt	75
AddNovaPrinterExt2	76
AddOverlay	78
AddOverlay2	79
AddProfile	79
AddProfile2	80
AddSaveRule	80
AddSaveRule2	81
AddUserTag	82
AddUserTag2	82
AddWatermarkImage	83
AddWatermarkImage2	83
AddWatermarkText	84
AddWatermarkText2	85
ClearCustomProperties	85
ClearFontOptions	85
ClearSaveRules	86
ClearUserTags	86
ConvertExcelDocument	86
ConvertExcelDocument2	87
ConvertPowerPointDocument	87
ConvertPowerPointDocument2	88
ConvertPublisherDocument	89
ConvertPublisherDocument2	90
ConvertVisioDocument	91
ConvertVisioDocument2	92
ConvertWordDocument	92
ConvertWordDocument2	94
CopyProfile	95
CopyProfile2	95
DeleteAction	96
DeleteAction2	96
DeleteBookmarkDefinition	97
DeleteCustomProperty	97
DeleteLayout	97
DeleteLayout2	98
DeleteNovaPrinter	98
DeleteNovaPrinter2	99
DeleteOverlay	99
DeleteOverlay2	99
DeleteOverrideOptions	100
DeletePrinterActivePublicProfile	100
DeletePrinterActivePublicProfile2	100
DeleteProfile	101
DeleteProfile2	101
DeleteSaveRule	102
DeleteUserTag	102
DeleteWatermarkImage	102
DeleteWatermarkImage2	103
DeleteWatermarkText	103
DeleteWatermarkText2	103

DisableAction	104
DisableAction2	104
DisableActionType	105
DisableCustomProperty	105
DisableSaveRule	105
DisableUserTag	106
EnableAction	106
EnableAction2	107
EnableActionType	107
EnableCustomProperty	107
EnableSaveRule	108
EnableUserTag	108
GetAction	109
GetAction2	109
GetActionCount	110
GetActionOptionBool	110
GetActionOptionBool2	111
GetActionOptionEcryptedString	112
GetActionOptionEcryptedString2	112
GetActionOptionFloat	113
GetActionOptionFloat2	114
GetActionOptionLong	114
GetActionOptionLong2	115
GetActionOptionString	116
GetActionOptionString2	116
GetActiveProfile	117
GetActiveProfile2	117
GetBookmarkDefinition	118
GetBookmarkDefinition2	119
GetBookmarkDefinitionCount	120
GetContentLayout	121
GetContentLayout2	121
GetCustomProperty	122
GetCustomProperty2	122
GetCustomPropertiesCount	123
GetFirstProfile	123
GetFirstProfile2	124
GetFontOption	124
GetFontOption2	125
GetLayout	125
GetLayout2	126
GetLayoutCount	126
GetLayoutCount2	127
GetLayoutOptionBool	127
GetLayoutOptionBool2	128
GetLayoutOptionFloat	129
GetLayoutOptionFloat2	129
GetLayoutOptionLong	130
GetLayoutOptionLong2	131
GetLayoutOptionString	132
GetLayoutOptionString2	132
GetNextProfile	133
GetNextProfile2	134
GetOptionBool	134

GetOptionEncryptedString	135
GetOptionEncryptedString2	135
GetOptionLong	136
GetOptionString	136
GetOptionString2	137
GetOverlay	137
GetOverlay2	138
GetOverlayCount	138
GetOverlayOptionBool	139
GetOverlayOptionBool2	139
GetOverlayOptionEncryptedString	140
GetOverlayOptionEncryptedString2	141
GetOverlayOptionFloat	141
GetOverlayOptionFloat2	142
GetOverlayOptionLong	143
GetOverlayOptionLong2	143
GetOverlayOptionString	144
GetOverlayOptionString2	145
GetOverrideOptionBool	145
GetOverrideOptionEncryptedString	146
GetOverrideOptionEncryptedString2	146
GetOverrideOptionLong	147
GetOverrideOptionString	147
GetOverrideOptionString2	148
GetPDFFileName	148
GetPDFFileName2	149
GetSaveRule	150
GetSaveRule2	150
GetSaveRulesCount	151
GetSignature	152
GetSignature2	152
GetUserTag	153
GetUserTag2	153
GetUserTagsCount	154
GetWatermarkImage	154
GetWatermarkImage2	155
GetWatermarkImageCount	155
GetWatermarkImageOptionBool	155
GetWatermarkImageOptionBool2	156
GetWatermarkImageOptionEncryptedString	157
GetWatermarkImageOptionEncryptedString2	157
GetWatermarkImageOptionFloat	158
GetWatermarkImageOptionFloat2	159
GetWatermarkImageOptionLong	159
GetWatermarkImageOptionLong2	160
GetWatermarkImageOptionString	161
GetWatermarkImageOptionString2	161
GetWatermarkTextOptionBool	162
GetWatermarkTextOptionBool2	162
GetWatermarkTextOptionFloat	163
GetWatermarkTextOptionFloat2	164
GetWatermarkTextOptionLong	164
GetWatermarkTextOptionLong2	165
GetWatermarkTextOptionString	166


GetWatermarkTextOptionString2	166
GetWatermarkText	167
GetWatermarkText2	167
GetWatermarkTextCount	168
Initialize	168
Initialize2	169
InitializeOLEUsage	169
InitializeSilent	169
InitializeSilent2	170
LicenseApplication	170
LicenseOLEServer	171
LicenseShellExecuteFile	171
LoadProfile	171
LoadProfile2	172
ModifyBookmarkDefinition	172
ModifyBookmarkDefinition2	173
RegisterEventWindow	175
RegisterNovaEvent	175
RegisterNovaEvent2	175
RestoreDefaultPrinter	176
SaveProfile	176
SetActionOptionBool	176
SetActionOptionBool2	177
SetActionOptionEncryptedString	178
SetActionOptionEncryptedString2	178
SetActionOptionFloat	179
SetActionOptionFloat2	180
SetActionOptionLong	180
SetActionOptionLong2	181
SetActionOptionString	182
SetActionOptionString2	182
SetActiveProfile	183
SetActiveProfile2	183
SetCustomProperty	184
SetCustomProperty2	184
SetDefaultPrinter	184
SetFontOption	185
SetFontOption2	185
SetLayoutOptionBool	186
SetLayoutOptionBool2	186
SetLayoutOptionFloat	187
SetLayoutOptionFloat2	188
SetLayoutOptionLong	188
SetLayoutOptionLong2	189
SetLayoutOptionString	190
SetLayoutOptionString2	190
SetOptionBool	191
SetOptionEncryptedString	191
SetOptionEncryptedString2	192
SetOptionLong	192
SetOptionString	193
SetOptionString2	194
SetOverlayOptionBool	194
SetOverlayOptionBool2	195

SetOverlayOptionEncryptedString	195
SetOverlayOptionEncryptedString2	196
SetOverlayOptionFloat	196
SetOverlayOptionFloat2	197
SetOverlayOptionLong	198
SetOverlayOptionLong2	198
SetOverlayOptionString	199
SetOverlayOptionString2	199
SetOverrideOptionBool	200
SetOverrideOptionEncryptedString	201
SetOverrideOptionEncryptedString2	201
SetOverrideOptionLong	202
SetOverrideOptionString	202
SetOverrideOptionString2	203
SetPrinterActivePublicProfile	203
SetPrinterActivePublicProfile2	204
SetPrinterOption	204
SetPrinterPublicProfile	204
SetPrinterPublicProfile2	205
SetPrinterServerFlags	205
SetPrinterServerFlags2	206
SetSaveRule	207
SetSaveRule2	207
SetUserTag	208
SetUserTag2	209
SetWatermarkImageOptionBool	209
SetWatermarkImageOptionBool2	210
SetWatermarkImageOptionEncryptedString	210
SetWatermarkImageOptionEncryptedString2	211
SetWatermarkImageOptionFloat	212
SetWatermarkImageOptionFloat2	212
SetWatermarkImageOptionLong	213
SetWatermarkImageOptionLong2	214
SetWatermarkImageOptionString	214
SetWatermarkImageOptionString2	215
SetWatermarkTextOptionBool	215
SetWatermarkTextOptionBool2	216
SetWatermarkTextOptionFloat	217
SetWatermarkTextOptionFloat2	217
SetWatermarkTextOptionLong	218
SetWatermarkTextOptionLong2	218
SetWatermarkTextOptionString	219
SetWatermarkTextOptionString2	220
UnRegisterEventWindow	220
WaitForNovaEvent	220
5 Samples	221
What sample to choose	221
Access	222
PDF Reports	222
ASP.NET	224
Hello World	224
Delphi	227
VCL Converter	227
Hello World Delphi	231

Convert Office Docs	234
Word OLE Delphi	237
Override Options	240
C#	243
Hello World CSharp	243
CSharp Converter	246
Word OLE CSharp	249
Convert Office Docs	251
Override Options	254
C++	259
Hello World	259
Hello World (network)	262
Convert Office Docs	263
MFC Converter	266
MFC Scribble	270
Temporary printer	273
Multiple printers	276
Override Options	280
Java	285
Hello World	285
Word OLE	290
VB	296
Hello World VB	296
VB Converter	298
Word OLE VB	302
Override Options	303
VBNet	306
Hello World VBNet	306
VBNet Converter	308
Word OLE VBNet	310
Convert Office Docs	312
Override Options	315
Install	319
Installation package bundle	319
 Index	 323

novaPDF SDK

Part

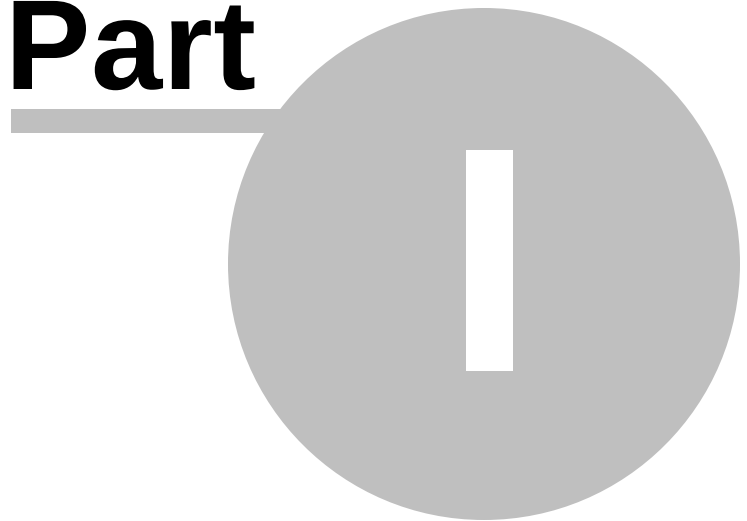

1 novaPDF SDK

1.1 Introduction

novaPDF SDK is a PDF software development kit that programmers can use to add the ability to create PDF files in their own applications. As a COM Object, novaPDF SDK can be integrated in any Windows 2008 Server R2/Vista/Windows 7/Windows 8/Windows 2012 Server/Windows 10/Windows 2016 Server application programmed in a language that supports COM Objects (C/C++/C#, Visual C, Delphi, Visual Basic ...).

novaPDF SDK includes:

- a COM interface for customizing novaPDF printer options.
- novaPDF SDK documentation including several code samples (ASP.NET, C#, C++, Delphi, Java, Ms Access, Visual Basic, VBNet)
- novaPDF SDK printer to distribute (royalty free licensing)

Details regarding novaPDF SDK:

- It is mandatory to distribute the novaPDF SDK printer in your application's setup. This is done under royalty free licensing (you only pay for the SDK license). If you don't want to show novaPDF SDK under the list of Printers, you can use a temporary printer each time your application creates a PDF file (meaning the client won't see novaPDF in the list of printers)
- You can integrate it without ordering, and purchase a license only after you have fully tested it.
- The licensed novaPDF SDK (COM object) lets users create PDFs without the watermark only from your application, not by printing directly to the printer. Registering the COM object does not register the novaPDF SDK printer.
- If you purchase a license you get free priority support.

Restrictions

You are not allowed to create a PDF printer driver using novaPDF SDK, or another application similar to a PDF printer driver (whose main purpose is to create PDF files). You can integrate and distribute novaPDF SDK with your application, as long as your application does some mandatory pre-processing operations to the resulting PDF files.

1.2 Overview

1.2.1 Installation

Install

To install novaPDF SDK on a computer you need to have administrative rights. The installation process does not take much time. All you need to do is to follow the instructions of the " novaPDF 10 SDK Developer Setup" wizard.

There is no need to reboot at the end of the setup; you can run the program right after it is installed on your machine. If you have already installed an older version of novaPDF SDK, you can install the new version on top of the older one, without uninstalling it. Your existing option profiles will be preserved when installing a new version.

Uninstall

You can uninstall the application using the "Add/Remove Programs" icon from the "Control Panel".

1.2.2 System requirements

To install novaPDF 10 SDK Developer you need one of the following operating systems:

- Windows 2016 Server
- Windows 10
- Windows 2012 Server
- Windows 8.1
- Windows 8
- Windows 7
- Windows 2008 Server R2
- Windows Vista

novaPDF 10 SDK Developer requires Microsoft .NET Framework 4.6

If not already installed, it will be downloaded and installed by novaPDF 10 SDK Developer setup.

It needs approximately 350MB of free space.

1.2.3 Components

novaPDF 10 SDK Developer installs files in two folders:

In "C:\Program Files\Softland\novaPDF 9" the installer will create the following folder structure:

Driver

Contains printer driver files and some tools, like Printer Manager

Editor

Contains Profile Manager files

Server

Contains the novaPDF Server service files that works with the profile database

SDK\Doc

Contains the help files and the license files

SDK\Installer

Contains the msi files that will be injected with your application and license information to be distributed with your application.

- novaPDF9PrinterDriver(x64).msi, novaPDF9PrinterDriver(x86).msi - installs printer driver, copies the files needed for driver, service and applications

- novaPDF9COM(x64).msi, novaPDF9COM(x86).msi - installs NovaPdfOptions90 COM
- novaPDF9SDK(x64).msi, novaPDF9SDK(x86).msi - installs configuration files (profiles database, license,...) and adds a printer

SDK\Lib

- novapi9.dll - INovaPdfOptions9 binary file. There are two versions of the dll, one for i386 systems and one for x64 systems

SDK\Tools

- novaPDF Co-Branding tool - customization tool for installers, see Customize your setup

In "C:\Users\Public\Documents\novaPDF 9\SDK" the installer will create the following folder structure:

Include

- definition files for INovaPdfOptions interface
- definitions for Windows messages and Profile option strings

Samples

Contains several samples of how to use INovaPdfOptions:

- Access PDF Reports - make a report on an Access database and convert it to PDF
- ASP.NET Hello World - an ASP.NET application that prints using the Printer object
- C++ Hello World - a console application that prints one page to the novaPDF SDK 10
- C++ Hello World (network) - the same as Hello World sample, but it can be run from any computer in the network, though the novaPDF SDK 10 is installed on one single computer
- C++ MFC Scribble - the standard MFC Scribble sample extended with generate PDF files
- C++ MFC Converter - a MFC dialogs sample that converts an existing file to PDF using different profiles on novaPDF SDK 10
- C++ Override Options - a console application that uses override options instead of option profiles and prints one page to the novaPDF SDK 10
- C# Hello World CSharp - a simple Windows console application that prints one page to the novaPDF SDK 10.
- C# CSharp Converter - converts an existing file to PDF using different profiles on novaPDF SDK 10
- C# Word OLE CSharp - converts a document created with Microsoft Word to PDF using Word automation
- C# Override Options - a console application that uses override options instead of option profiles and prints one page to the novaPDF SDK 10
- Delphi Hello World Delphi - a Delphi application that prints using the Printer object
- Delphi VCL Converter - a Delphi application that converts an existing file to PDF using different profiles on novaPDF SDK 10
- Delphi Word OLE Delphi - converts a document created with Microsoft Word to PDF using Word automation
- Delphi Override Options - a console application that uses override options instead of option profiles and prints one page to the novaPDF SDK 10
- Java Hello World Java - an Java application that prints using the Printer object
- Java Word OLE (Java) - converts a document created with Microsoft Word to PDF using Word

automation

- VB Hello World VB - a VB application that prints using Printer object
- VB VB Converter - a VB application that converts an existing file to PDF using different profiles on novaPDF SDK 10
- VB Word OLE VB - converts a document created with Microsoft Word to PDF using Word automation
- VB Override Options - a console application that uses override options instead of option profiles and prints one page to the novaPDF SDK 10
- VBNet Hello World VBNet - a VBNet console application that prints one page to the novaPDF SDK 10.
- VBNet VBNet Converter - a VBNet application that converts an existing file to PDF using different profiles on novaPDF SDK 10
- VBNet Word OLE VBNet - converts a document created with Microsoft Word to PDF using Word automation
- VBNet Override Options - a console application that uses override options instead of option profiles and prints one page to the novaPDF SDK 10
- Wix bundle - setup sample; compresses the msi files in an setup executable

Bin

- sample executables for DotNet, Win32 and Win64

1.2.4 Network use

novaPDF SDK 10 network auto-install

novaPDF SDK 10 can be installed on one computer and can be used by any computer in the network, without having to install it on each computer. This is to ease the work of network administrators both at installation time and future upgrades.

novaPDF SDK 10 supports Point and Print technology. This means that you can install the printer on one computer on the network, share it, and you can connect to it from any other computer. The system copies the necessary files for the driver, without any user interaction. On the server there are installed both i386 and x64 drivers and you can connect from the network with any i386 or x64 computers.

How to use novaPDF SDK 10 in a network

If you have a large network you can install novaPDF SDK 10 and your application which integrates novaPDF 10 SDK Developer on a single computer and use it from any computer in the network. All you need to do in your software is to initialize the `INovaPdfOptions` interface with the correct printer name, including the name of the computer on which it is installed (like "\\server\novaPDF SDK 10").

When the application initiates the first print job to the printer server, the system copies the necessary printer driver files without any user interaction and the print job is completed on the printer server.

You can configure private or public profiles on the printer server. Public profiles will be visible on all client computers and all users. Private profiles are visible only for the user that created them. See Private and public profiles for more details.

The COM has to be installed and registered on every computer that uses it., see here [How to register COM](#).

An alternative solution is to use the reg-free registration-free COM technology that enables your application to use the COM without registering it. You just have to import the COM manifest in your application and copy the COM dll in the same folder with your application executable. (you need the novapi9.dll and novasv9.dll).

1.2.5 Multiple printers

There can be added several printers, each of them using a different active profile. In this way, the users will decide to which printer to print instead of using the same printer and changing its active profile.

The best way to add multiple printers is at installation time. When running the Co-Branding Tool define all printers you wish to install. The msi that will be generated will add all these printer at installation.

novaPDF printers can be added also manually from the Printer Manager tool. On the first page there can be added/deleted printers and on the second page there can be set which public profiles to be used with each printer. Take care that administrative privileges are required for adding / removing printers.

Printer Manager tool can also be run silently from command line. Take care to run it with administrative privileges.

To add a printer call the PrinterManager.exe tool, from the printer driver installation folder C:\Program Files\Softland\novaPDF 9\Driver. Call it for each printer with next command line parameters:

```
PrinterManager.exe /silent /oem=<your OEM ID> /port=8501 /add /printer=<printer name> /printerport=<port name>
```

It is better to add each printer on a different port so they can work independently. When multiple printers work on the same port, the documents are processed sequentially.

To assign a default active profile for a printer call the Printer Manager tool with next command line parameters:

```
PrinterManager.exe /silent /oem=<your OEM ID> /port=8501 /printer=<printer name> /set /profile=<profile id>
```

Or you could perform both steps in one call, add a printer and set the active profile

```
PrinterManager.exe /silent /oem=<your OEM ID> /port=8501 /add /printer=<printer name> /printerport=<port name> /profile=<profile id>
```

You may see the profile id when you start the Profile Manager tool in administrative mode, from

the Printer Manager tool.

Other optional command line parameters for PrinterManager.exe are:

/allowprivates=true (or false) - specify if the printer allows or not private profile to be created
/showselect=true (or false) - specify if Select Profile dialog should be shown when printing
/allowhide=true (or false) - specify if users are allowed to hide Select Profile dialog
/adminmode=true (or false) - specify if Profile Manager should be started in Admin mode only from Printer Manager; if false, Profile Manager is always started in Admin mode (where public profiles can be created/modified)

1.3 Integration

1.3.1 How to integrate

You have to follow these steps for integrating novaPDF 10 SDK Developer in your application:

1. Install novaPDF 10 SDK Developer

When installing novaPDF 10 SDK Developer, a "novaPDF SDK 10" printer is added in the Printers list in Control Panel.

2. Take a sample and test it

See What sample to choose topic for directions how to choose the best sample for your situation.

3. Copy relevant code from the sample in your application

Be sure you include all next steps from samples:

- customize novaPDF SDK 10 settings using INovaPdfOptions10 COM interface (for instance set the output file name and folder, document info,...). See Profile options topic for a list of all option constants. There are global definition files for all supported programming languages.
- start a print job and write to the printer device context (using functions like CreateDC, StartDoc, StartPage, TextOut,...). Or open a file and print it with other methods, like calling ShellExecute().

4. Test how your application prints to novaPDF SDK 10

When you print to novaPDF SDK 10, the generated PDF files have an unlicensed notice on the bottom of the PDF pages. To remove this text please read the How to make the release build topic.

1.3.2 How to make the release build

After you succeeded to integrate novaPDF 10 SDK Developer in your application (see How to integrate topic) you have to follow next steps:

1. Purchase a novaPDF 10 SDK Developer license

If you want to remove the novaPDF notice from the generated PDF files, you have to purchase a license. There are two types of application licenses:

1. **Software application license** - this type of license allows you to develop, market and distribute ONE program or ONE software product that integrates the novaPDF 10 SDK Developer to an unlimited number of end users without any additional fees.
2. **Component application license** - This type of license allows you to develop, market and distribute ONE component, ONE wrapper, ONE library or ONE module that integrates the novaPDF 10 SDK Developer to an unlimited number of end users without any additional fees.

After purchase, you will receive an email with the next information:

- license key
- licence file
- customization file

Each licensed user will received an unique ID that will guarantee your **novaPDF 10 SDK Developer** customized installers will install separately from the other users'.

2. Customize redistributable novaPDF installers with your license

With novaPDF 10 SDK Developer there is installed a tool called "novaPDF Co-Branding". You should run this tool to generate the msi files customized for your license. You can start this tool from the novaPDF 10 SDK Developer installation menu. See Customize your setup for more details. You will need the resulting customized setup files in step 3 below.

3. Install customized printer installation files

For testing purposes install novaPDF 10 SDK Developer running the resulting customized setup files (MSI) in the following order:

On Windows 32 bit computers:

- novaPDF9PrinterDriver(x86).msi - installs both 32 and 64 bit versions of the printer driver
- novaPDF9COM(x86).msi - installs the 32 bit version of the COM
- novaPDF9SDK(x86).msi - installs the custom, licensed printer

On Windows x64 computers:

- novaPDF9PrinterDriver(x64).msi - installs both 32 and 64 bit versions of the printer driver
- novaPDF9COM(x64).msi - installs the 64 bit version of the COM
- novaPDF9COM(x86).msi - installs the 32 bit versions of the COM (only install this if your application is 32 bit)
- novaPDF9SDK(x64).msi - installs the custom, licensed printer

You can install the msi silently using the following command line:
`msiexec /i <msi file name> /qn`

You can install the package bundle silently using the following command line:
`<setup name> /q`

To create the final release build you need to create an installation package bundle and run it. See

the Build an installation package bundle topic.

4. Print without unlicensed notice

Your printer should be licensed now so the generated PDF files should not have the unlicensed footer notice.

If the footer notice is still showing up, you have to verify that you followed the steps from How to integrate correctly.

1.3.3 Customize your setup

Each developer that integrates a novaPDF 10 SDK Developer license will receive a unique OEM ID so its novaPDF installation does not interfere with other developers installation. In order to have an unique, licensed printer, you have to customize the setup that you will distribute with your application with the "novaPDF Co-Branding" tool. Run the tool and follow the wizard steps to generate the msi.

1.3.4 Co-Branding Tool

1.3.4.1 Folders

Branding folder

When starting the application, you will be asked for the branding folder. This is the folder where the new msi files will be generated. You can create a new folder or use an existing one. If you choose an existing folder, the files from the folder will be deleted and the original msi installers will be copied there and injected with the new properties.

Settings file

If you already have run the tool and you only wish to change some options, select the settings file from the previous run.

1.3.4.2 Files

There are several files that can be injected in the .msi:

Customization (.ctm) and License (.lic) files.

License file contains information about your license and Customization file is used for re-branding options. Contact novaPDF 10 SDK Developer support team for more information about re-branding.

When buying a the novaPDF 10 SDK Developer license will receive these two files. You should use them both to create a licensed printer.

If you do not have the novaPDF 10 SDK Developer license yet, select the "Use default Customizations (*.ctm) and License (*.lic) files" option to use some files that the novaPDF 10 SDK Developer provide for trial testing.

Controls (.ctl) file

Special customization file for the Profile Manager tool. Contact novaPDF 10 SDK Developer support team for more information about customizing Profile Manager tool.

Forms (.nps) file

This file contains the printer forms available for the printer. This is a text file and you can modify it to distribute the forms you wish. User defined forms should have a format like this:

0;0;281;36x48inches;36x48inches;914400;1219200;0;0;0;0;

(increase the form number on third position and specify form width and height in thousands of millimeters)

Resolutions (.npr) file

This file contains the resolutions available for the printer. This is a text file and you can modify it to distribute the resolutions you wish. Resolutions should be values between 50 and 2400 and you can specify maximum 100 resolutions.

EULA (*.rtf)

Default EULA file is empty. You can select the EULA document for your application.

Help (.chm) file

If you wish to install a different help file in .chm format.

Use only default profiles and presets

It will be installed an empty profiles database, containing only default options. The default profiles database will overwrite existing profiles database from previous installation.

Use profiles and presets you defined

If you wish to distribute some public profiles with your application, you can define the public profiles by running the Profile Manager tool. The profiles database will be included in your customized msi.

Overwrite existing profiles and presets

If this option is set, the new profiles database will be copied over existing profiles database from previous installation so the new defined profiles will be available on upgrades installations too. If this option is not set, when upgrading over a previous installation the profiles database is not copied so are kept previous profiles.

Default Files

All files from Default files folder will be included in the msi. Add there all files (image

watermarks, certificates, overlay files) you wish to distribute.

1.3.4.3 Settings

Your application name

The application name will appear in Windows Start menu, in Control Panel \ Programs and on the About page of the installed printer and tools.

Your company name

The company name will appear on the About page of the installed printer and tools.

Language code

Language for novaPDF printer and installed tools.

Add a start menu folder

Enter the name of the Windows menu. You can also choose what links to be added in the menu (Printer Manager tool, Printer Monitor tool and Help file).

Add Printer

The installer can add one or multiple printers at installation. You can also choose to not add any printer at installation time. For each printer you can configure:

- printer name
- printer port name
- if the printer should be set default printer on the system
- associate a public profile with the printer
- printer defaults (default paper size, resolution, orientation, scale and others)
- printer permissions (permissions to change paper size, resolution, orientation, scale and others)

Inject

When you finish the configuration press the Inject button to create the msi files.

There will be shown a dialog asking if you wish to save the configured options in a file so you can reuse it when running again the Co-Branding tool.

1.3.4.3.1 Add/Modify Printer

1.3.4.3.1.1 General

For each printer you can configure:

Printer name

The name of the printer that you wish to install with your application.

Port name

The name of the port for the printer. Choose a name specific to your application so it will be unique. If you add multiple printers, it is better to put them on different ports, otherwise the

documents will be processed sequentially.

Share printer

You can share the printer in the network and choose the share printer name.

Make printer default

You can also choose if the printer should be set as the default printer on the system.

1.3.4.3.1.2 Profile

Allow users to use private profiles

If users can create private profiles with the Profile Manager tool and use them when converting documents.

Show Select Profile dialog before printing

Force the show of Select Profile dialog before printing a document for all users. You can allow users to disable the dialog or not.

GUID of the active profile

The GUID of the public profile that you wish to set as default for the installed printer. You can copy the GUID from the Profile Manager, when it is opened in the Administrative mode (from the Printer Manager tool).

This parameter is not mandatory.

1.3.4.3.1.3 Page defaults

The default page size for the printer can be a predefined paper or a custom paper size.

Use existing page size

Choose from one of the predefined paper sizes.

The page sizes can be changed in the Forms (.nps) file

Define new page size

You can specify a new page size to be added when installed. Enter paper name, description, width and height. This new page size will be the default page size for the printer.

1.3.4.3.1.4 Other defaults

Enter printer specific default options:

Orientation

Default printer orientation can be Portrait or Landscape.

Resolution

Default resolution. Usually 300 or 600.

Scale

Default printer scale percent. Usually 100.

Copies

How many page copies to create. Usually 1.

Collate

If creating multiple pages, in what order to add the copies.

Maximum copies

How many copies should be maximum allowed.

1.3.4.3.1.5 Permissions

Users can be restricted to modify certain printer options:

- page size
- orientation
- resolution
- scale
- copies
- collate

1.3.4.4 Results

When pressing the inject button the new customized msi files will be created.
The settings you filled in these pages can be saved in an ini file in the branding folder.

After running the tool, next msi files will be available in the branding folder:

- novaPDF9PrinterDriver(x64).msi or novaPDF9PrinterDriver(x86).msi - each of them installs both 32 and 64 bit versions of the printer driver
- novaPDF9COM(x64).msi or novaPDF9COM(x86).msi - install 32 and 64 bit versions of the COM
- novaPDF9SDK(x64).msi or novaPDF9SDK(x86).msi - install the custom, licensed printer

Note

After the msi files are injected with your custom parameters, their digital signature becomes invalid so they need to be signed again. See more details in the topic Build an installation package bundle

1.3.5 Build an installation package bundle

If you already have an installation package for your application, you only need to add the novaPDF 10 SDK Developer msi files to your package.

If not, you can start with the installation package sample we included with novaPDF 10 SDK Developer. Follow the steps below to create the bundle:

1. Install WIX Toolset 3.9

This is a free and open source set of tools for building Windows installation packages. You will use this to create the bundle.

2. Sign the novaPDF 10 SDK Developer msi files

All msi files have to be signed with a valid digital signature. You can sign them by running the **signtool.exe** tool and providing your company digital signature file.

If you do not have a digital signature file you can upload the msi files on our site to be signed with Softland's signature. Log in to your account, go to your license key and press CODESIGN REQUEST button:

<https://www.novapdf.com/myaccount.login.html>

You will be requested to enter your novaPDF 10 SDK Developer license key, your email address and the path to the msi file.

You have to upload and sign these two msi files:

- novaPDF9SDK(x64).msi
- novaPDF9SDK(x86).msi

You will receive an email with the download link for the signed msi files.

3. Open the Installation package bundle sample and build the setup executable.

In the sample you have to change the defined variables with information about your application: application name, company name, version, company site url.

It is very important to change the Upgrade code to a new generated GUID, because each application should have its unique GUID so it installs separately on Windows.

Also, take care to set the correct path of the novaPDF 10 SDK Developer msi files.

If you wish to sign the bundle exe, you have to use your company's signature. Use the signtool.exe and the insignia.exe tools to sign, like this:

```
"C:\Program Files (x86)\WiX Toolset v3.9\bin\insignia.exe" -ib "C:\Users\Public\Documents\novaPDF 9\OEM\Samples\OEMBund
le\OEMBund
le\bin\Release\OEMBund
le.exe" -o "C:\Users\Public\Documents\novaPDF 9\OEM\Samples\OEMBund
le\OEMBund
le\bin\Release\tmp.
```

```

exe"
"signtool.exe" sign /f "<your signature file>" /p <your signature password> /du "<your company
site>" /t http://timestamp.verisign.com/scripts/timestamp.dll "C:
\Users\Public\Documents\novaPDF 9\OEM\Samples\OEMBund\OEMBund\bin\Release\tmp.
exe"
"C:\Program Files (x86)\WiX Toolset v3.9\bin\insignia.exe" -ab "C:
\Users\Public\Documents\novaPDF 9\OEM\Samples\OEMBund\OEMBund\bin\Release\tmp.
exe" "C:\Users\Public\Documents\novaPDF 9
\OEM\Samples\OEMBund\OEMBund\bin\Release\OEMBund.exe" -o "C:
\Users\Public\Documents\novaPDF 9
\OEM\Samples\OEMBund\OEMBund\bin\Release\OEMBund.exe"

```

1.3.6 Installation package bundle

This is a sample on how to compress the msi installations packages in a bundle and generate an setup executable to install novaPDF 10 SDK Developer. If you haven't already done so, you will need to install the Wix Toolset to build this project.

The project contains two files:

1. Variables.wxi - contains variables for application name, company name, version,...; **it's important to change the UpgradeCode to an unique new GUID for your application**
2. Bundle.wxs - contains the msi files that need to be included and the execution order; **.Net Framework 4 is required by novaPDF 10 SDK Developer and is set as prerequisite**

Variables.wxi

```

<?xml version="1.0" encoding="utf-8"?>
<Include>

  <?define BundleName="My SDK Application Bundle"?>
  <!--change the UpgradeCode to an unique new GUID for your application-->
  <?define UpgradeCode="C08317E3-A50E-4D51-802A-92EE332821AD"?>

  <?define AboutUrl='http://www.novapdf.com'?>
  <?define SplashImage=" "?>
  <?define IconFile=" "?>

  <?define MyLicenseFileName="C:\ProgramData\Softland\novaPDF
9\NpdfSdk9_Softland\NpdfSdk9_SoftlandEulaExt.rtf" ?>

  <!--version-->
  <?define MajorVersion="9"?>
  <?define MinorVersion="0"?>
  <?define BuildNumber="36"?>

  <!--manufacturing-->
  <?define Manufacturer="<My SDK Company Name>" ?>

```



```

<!--product name-->
<?define ProductName="<My SDK Application Name">"?>

<!--full product name-->
<?define FullProductName="$(var.ProductName) $(var.MajorVersion)" ?>

<!--bundle specific-->
<?define DriverKit86="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9PrinterDriver(x86).msi"?>
<?define DriverKit64="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9PrinterDriver(x64).msi"?>

<?define COMPathx64="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9COM(x64).msi"?>
<?define COMPathx86="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9COM(x86).msi"?>

<?define OemKit86="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9SDK(x86).msi"?>
<?define OemKit64="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9SDK(x64).msi"?>

</Include>

```

Bundle.wxs

```

<?xml version="1.0" encoding="UTF-8"?>
<Wix xmlns="http://schemas.microsoft.com/wix/2006/wi"
  xmlns:util="http://schemas.microsoft.com/wix/UtilExtension"
  xmlns:bal="http://schemas.microsoft.com/wix/BalExtension"
  xmlns:swid="http://schemas.microsoft.com/wix/TagExtension"
  xmlns:dotNet="http://schemas.microsoft.com/wix/NetFxExtension">

  <?include "Variables.wxi"?>
  <Bundle Name="$(var.BundleName)"
    Version="$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber).0"
    Manufacturer="$(var.Manufacturer)"
    UpgradeCode="$(var.UpgradeCode)"
    AboutUrl='$(var.AboutUrl)'
    SplashScreenSourceFile='$(var.SplashImage)'
    Compressed='yes'
    IconSourceFile="$(var.IconFile)" >

    <swid:Tag Regid="regid.2008-09.org.wixtoolset" />

    <!--change the UpgradeCode to an unique new GUID for your application-->
    <RelatedBundle Id="$(var.UpgradeCode)" Action="Upgrade"/>

    <!--application license-->
    <BootstrapperApplicationRef Id="WixStandardBootstrapperApplication.RtfLicense" >
      <bal:WixStandardBootstrapperApplication LicenseFile="$(var.MyLicenseFileName)"
        SuppressOptionsUI="yes"/>
    </BootstrapperApplicationRef>

```

```

    <Chain>
      <!--prereqs-->
      <PackageGroupRef Id="NetFx40Web"/>

      <!--COM-->
      <MsiPackage Id="COMx86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)
" Cache="yes"
                CacheId="
COMIdx86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" DisplayInternalUI=
"no"
                EnableFeatureSelection="no" ForcePerMachine="yes"
                Compressed="yes" SourceFile="$(var.COMPathx86)" Visible="yes" Vital="
yes">
      </MsiPackage>

      <MsiPackage Id="COMx64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)
" Cache="yes"
                CacheId="
COMIdx64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" DisplayInternalUI=
"no"
                EnableFeatureSelection="no" ForcePerMachine="yes"
                Compressed="yes" SourceFile="$(var.COMPathx64)" Visible="yes" Vital=
"yes" InstallCondition="VersionNT64">
      </MsiPackage>

      <!--driver-->
      <MsiPackage Id="
DriverPackagex86.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="
yes"
                CacheId="
DriverPackageIdx86.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
                EnableFeatureSelection="yes" ForcePerMachine="yes"
                Compressed="yes" SourceFile="$(var.DriverKit86)" Visible="yes" Vital
="yes" InstallCondition="NOT VersionNT64">
      </MsiPackage>

      <MsiPackage Id="
DriverPackagex64.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="
yes"
                CacheId="
DriverPackageIdx64.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
                EnableFeatureSelection="yes" ForcePerMachine="yes"
                Compressed="yes" SourceFile="$(var.DriverKit64)" Visible="yes" Vital
="yes" InstallCondition="VersionNT64">
      </MsiPackage>

      <!--oem product-->
      <MsiPackage Id="
OemPackagex86.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="yes"
                CacheId="
OemPackageIdx86.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
                EnableFeatureSelection="no" ForcePerMachine="yes"

```

```

        Compressed="yes" SourceFile="$(var.OemKit86)" Visible="no" Vital="
yes" InstallCondition="NOT VersionNT64">

    </MsiPackage>

    <MsiPackage Id="
OemPackagex64.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="yes"
        CacheId="
OemPackageIdx64.$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
        EnableFeatureSelection="no" ForcePerMachine="yes"
        Compressed="yes" SourceFile="$(var.OemKit64)" Visible="no" Vital="
yes" InstallCondition="VersionNT64">
    </MsiPackage>

</Chain>
</Bundle>

<Fragment>
    <!--UI-->
    <UI Id="MyWixUI_Mondo">
        <UIRef Id="WixUI_Mondo"/>
        <UIRef Id="WixUI_ErrorProgressText"/>
    </UI>
</Fragment>

</Wix>

```

1.4 novaPDF COM

1.4.1 How to register COM

novaPDF SDK includes a COM interface, INovaPdfOptions. The COM binary file is located in the Lib sub folder. The COM is first registered when installed with novaPDF SDK. If you want to register/unregister novaPDF COM manually, use the following commands from the command line:

Register

```
regsvr32.exe "C:\Program Files\Softland\novaPDF 9\SDK\Lib\i386\novapi9.dll"
```

or, for x64 systems:

```
regsvr32.exe "C:\Program Files\Softland\novaPDF 9\SDK\Lib\x64\novapi9.dll"
```

Unregister

```
regsvr32.exe /u "C:\Program Files\Softland\novaPDF 9\SDK\Lib\i386\novapi9.dll"
```

or, for x64 systems:

```
regsvr32.exe /u "C:\Program Files\Softland\novaPDF 9\SDK\Lib\x64\novapi9.dll"
```

msi

In the "C:\Program Files\Softland\novaPDF 9\SDK\Installer" folder there are two msi that install the x86 or x64 version of the COM and register it. These only install the COM and they are meant to be used on client computers if you install novaPDF printer on a server and run your application

from different computers:

```
novaPDF9COM(x86).msi  
novaPDF9COM(x64).msi
```

1.4.2 How to use the COM

To use novaPDF COM in your application you need to follow next steps:

1. Create an instance of **INovaPdfOptions** interface

Create the object when the application starts and use it while printing to novaPDF SDK 10 printer

2. Call the **Initialize** method

Initialize method has one parameter, the name of the printer (for example "novaPDF SDK 10", or when on the network "\\server name\novaPDF SDK 10")

3. Set novaPDF SDK 10 options by calling **SetOptionString** or **SetOptionLong (...)** methods.

You can also manage profiles with **AddProfile**, **CopyProfile**, **DeleteProfile**, **GetFirstProfile**, **GetNextProfile**, **GetActiveProfile**, **SetActiveProfile** methods. A good sample for how to use this methods is the MFC Converter sample. Also, all "Hello World" samples have a "nova" unit where there are samples on how to set all options.

This step is optional. If you use the default options or if you already configured the desired options, you can skip it.

4. Register your application to receive **Windows** messages

novaPDF printer sends messages (**StartDoc**, **StartPage**, **EndPage**, **EndDoc**, **FileSent**, **Print Error**) while printing a document. You can register to receive Windows messages using the **RegisterEventWindow** method. You also need to implement message handlers for the registered messages. See MFC Scribble or MFC Converter samples.

This step is also optional. If you do not need to implement this event handlers you can skip it.

5. Start a print job. You can do it as follows:

- use Win32 API functions: **OpenPrinter**, **DocumentProperties**, **CreateDC**, **StartDoc**, **StartPage**,... See the Hello World sample.
- print a file using the **ShellExecute** function. For a sample see MFC Converter.
- use MFC document/view architecture. For more information look at the MFC Scribble sample.

6. Release the **INovaPdfOptions** instance

The object should be released only when all print jobs are finished.

1.4.3 How to set printer options

You can use **INovaPdfOptions** interface to read or set novaPDF SDK 10 options.

INovaPDFOptions provides the following methods for this:

```
GetOptionString  
SetOptionString
```

```
GetOptionLong  
SetOptionLong  
SetOptionBool  
GetOptionBool  
[****]
```

The options are saved in the current loaded profile. See Private and public profiles topic for more details about profiles.

You have to make these settings before starting the print job.

You can find the complete list of option constants that you can use in the `GetOptionXXXX` and `SetOptionXXXX` in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: `novaOptions.h`, `novaOptions.pas`, `Globals.bas`.

Before setting the options the profile should be loaded with `LoadProfile` and when finish the profile should be saved with `SaveProfile`. Before printing a document, set the profile you wish to use with `SetActiveProfile`.

1.4.4 Private and public profiles

Public profiles are visible from all client computers and from all users. You should use public profiles if you want to configure printing options that should be used by several computers in your network. For instance, you can configure a folder where all client computers will save the PDF files.

Private profiles are visible only to the user that created them.

1.4.5 How to register for messages

novaPDF SDK 10 generates the following events when processing a print job:

- Document Started
- Page Started
- Page Ended
- Document Ended
- File Sent
- File Saved
- Print Error
- Email Sent
- Email Error

When the events are fired by the driver, these Windows messages are sent to a registered window handler. To receive a message you need to register your window handle with the `RegisterEventWindow` method. See the MFC Converter and MFC Scribble samples.

These events are fired when the print job is processed by the driver. When an application sends a print job to the printer, the print job is added in the printer spooler queue. There might be other jobs waiting in the queue that have to be finished before your job starts. So there might be some delay between the moment the application is sending the job to the printer, the moment the job is actually processed and the time when the PDF file is saved. If you need for instance to open the PDF file afterwards, you need to register to the File Saved message and process the PDF file in this message handler.

1.4.6 How to use events

If you want to wait for a print job to be finished, you can register some Windows events and wait for them to be signaled by novaPDF SDK 10.

Before starting the print job, you have to inform novaPDF SDK 10 that you want to be wait for an event.

Call `RegisterNovaEvent(LPCWSTR p_wsEventName)` with one of the next strings:

```
"NOVAPDF_EVENT_START_DOC"  
"NOVAPDF_EVENT_END_DOC"  
"NOVAPDF_EVENT_FILE_SAVED"
```

After you send the job to the printer, call `WaitForNovaEvent(ULONG p_nMilliseconds, BOOL* p_bTimeout)`. This function will return when the event was signaled or when the time was elapsed. If the time was elapsed `p_bTimeout` is `TRUE` and if the event was signaled, `p_bTimeout` is `FALSE`.

If you just want to be sure that the print job was started, the profile was read, and you want to proceed modifying the profile for the next job, you should wait for the `NOVAPDF_EVENT_START_DOC` event. If you are interested where the PDF file is ready so you can do further actions with it, you should wait for the `NOVAPDF_EVENT_FILE_SAVED` event.

1.4.7 Multithreading applications

If you wish to use novaPDF in multi-threading or multi-process applications, there are some restrictions.

novaPDF COM is not thread safe, you should implement your own thread synchronization when using the COM.

When you use third party applications to print, they have to be licensed separately by using the `LicenseApplication` call. Because this call does not license this application for any print calls, but just for the next print job that will be executed by the printer, the calls of `LicenseApplication` and the execution of a print job must go in pair. If you call several times `LicenseApplication` in your code, but the printer processes some of the jobs later, they might not be licensed. So to assure these pair executions use next two calls when printing:

Before starting the print job call:

```
RegisterNovaEvent("NOVAPDF_EVENT_START_DOC")
```

After sending the print job, wait for the printer to start processing it and read the licensing for it by calling:

```
WaitForNovaEvent(-1, &bTimeout)
```

1.4.8 Use temporary printers

If you do not wish a novaPDF printer visible in the Printers list, you could use this approach:

When customizing your installer, do not add a printer (see [Customize your setup](#))

What this means is that only the novaPDF printer driver and the COM are installed, but no printer is added in the Printers list.

In your application code, when you want to use novaPDF to convert to PDF:

- first call `AddNovaPrinter` to add a temporary printer
- set the printer options using the `SetOptionXXX` methods
- print a document, or several documents to generate PDF files
- delete the temporary printer with `DeleteNovaPrinter`

You may call the `AddNovaPrinter` and `DeleteNovaPrinter` several times, the only restriction is to call it in pair so you do not leave unused printers in the printers list.

When deleting a printer there might happen that the jobs are not all processed yet and there are still jobs in the printer queue. If you wish those PDF file to be generated, then is better to wait for the PDF to be finished before deleting the printer. It is recommended to use the event methods we provide ([How to use events](#)).

Network printing

If you wish to install novaPDF printer on a server and share it in the network, then a printer has to be added at installation time on the server, or the `AddNovaPrinter` and `DeleteNovaPrinter` must be called from an application running on server. This solution works on client computers by adding a printer connection to the printer on server instead of adding a local printer. So in this situation these are the changes:

- the installer must be run on the server normally, installing a printer there
- the application code is the same, only the printer name must contain the server path, like this: `\\<server name>\<printer name>`, where the `<printer name>` printer must exist on server

Restrictions

On some operating systems you need administrative rights to add/delete a printer. Below you can see a list of operating systems supported by novaPDF, and what type of user accounts are working:

System	Administrator	Power user	User
Windows XP	yes	no	no
Windows 2003 Server	yes	no	no
Windows Vista	yes	yes	yes
Windows 7	yes	yes	yes

Windows 2008 Server	yes	no	no
Windows 8	yes	yes	yes
Windows 2012 Server	yes	no	no

1.4.9 Working with Layout

In the Profile Manger tool there is a page called Layout where different objects can be placed and arranged with anchors on the page. There can be added image watermarks, text watermarks, overlay pdf document, signature. Also the printed page content itself can be arranged how to fit on the PDF page.

For each object there can be specified the anchors relative to the page: left, right, top, bottom, center vertically or center horizontally. The values can be absolute or in percentage relative to the page width and height.

When adding such an object from source code, you have to specify all these settings that you can also find on the Layout page (anchors flags and values, size, rotation, keep aspect ratio flag). If you wish to add one of these objects in the profile, configure first how it should appear on page using the Profile Manager tool, then copy generated settings in the source code.



1.4.10 Working with Actions

Action is a notion introduced in version 9 of novaPDF. An action is a task that novaPDF printer driver will execute before or after generating the pdf file. An action can be:

- copy or delete a file
- send an email or upload to ftp/sftp
- open the pdf in the default viewer
- run another application

Actions are saved in a list and they can be arranged in any order. By default, each profile contains two action:

- the "Save PDF" action is the one that generated the pdf file; this action cannot be removed from profile and it is added in the actions list as a referring item, so other actions can be added before or after this action depending at which moment the action should be run
- an "Open PDF" action that will open the PDF after it is generated; this is the default behavior but this action can be disabled if you do not wish to open the PDF

You can:

- add new actions in the list with an `AddAction` call
- change action properties with `SetActionOptionString`, `SetActionOptionLong`,.... for specific action settings
- change the order in which the actions are executed using the `SetActionOptionLong` (`pwsActionID`, `NOVAPDF_ACTION_INDEX`, `index`);
- enable or disable an action without removing it from the list with `EnableAction` and `DisableAction`

- enable or disable all actions of a specific type (for instance disable all open actions) with `DisableActionType` and `EnableActionType`
- remove actions from the list with `DeleteAction`

If you wish to not open the PDF after it is generated simply disable all open actions like this:

```
pNova.DisableActionType(NOVA_ACTION_OPEN)
```

1.4.11 Reference

1.4.11.1 Profile option strings

novaPDF SDK 10 settings are saved in a database on the server. The profiles are available for all printers.

COMPRESSION

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_COMPRESS_ENABLE	9	bool		true	SetOptionBoolean
NOVAPDF_COMPRESS_TEXT_GRAPHICS	63	bool		true	SetOptionBoolean
NOVAPDF_COMPRESS_HIGH_COLOR	54	bool		true	SetOptionBoolean
NOVAPDF_COMPRESS_MONOCHROM	60	bool		true	SetOptionBoolean
NOVAPDF_COMPRESS_INDEXED	57	bool		true	SetOptionBoolean
NOVAPDF_COMPRESS_TEXT_GRAPHICS_TYPE	64	long	0 - zip compression	0	SetOptionLong
NOVAPDF_COMPRESS_TEXT_GRAPHICS_LEVEL	65	long	1-9	5	SetOptionLong
NOVAPDF_COMPRESS_HIGH_COLOR_TYPE	55	long	0 - zip compression 1 - JPEG compression	1	SetOptionLong
NOVAPDF_COMPRESS_HIGH_COLOR_LEVEL	56	long	1-9	7	SetOptionLong
NOVAPDF_COMPRESS_INDEXED_TYPE	58	long	0 - zip compression	0	SetOptionLong

NOVAPDF_COMPRESS_INDEXED_LEVEL	59	long	1-9	5	SetOptionLong
NOVAPDF_COMPRESS_MONOCHROM_TYPE	61	long	0 - zip compression	0	SetOptionLong
NOVAPDF_COMPRESS_MONOCHROM_LEVEL	62	long	1-9	5	SetOptionLong

GRAPHICS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_GR_DOWNSMPL_ENABLE	11	bool		false	SetOptionBool
NOVAPDF_DOWNSAMPLE_HIGH_COLOR	84	bool		false	SetOptionBool
NOVAPDF_DOWNSAMPLE_RES_HIGH_COLOR	86	long	72 - 2400	96	SetOptionLong
NOVAPDF_DOWNSAMPLE_TYPE_HIGH_COLOR	85	long	0 - BOX Filter 1 - BILINEAR Filter 2 - BSPLINE Filter 3 - BICUBIC Filter 4 - CATMULLROM Filter 5 - LANCZOS3 Filter	3	SetOptionLong
NOVAPDF_DOWNSAMPLE_INDEXED	87	bool		false	SetOptionBool
NOVAPDF_DOWNSAMPLE_RES_INDEXED	89	long	72 - 2400	96	SetOptionLong
NOVAPDF_DOWNSAMPLE_TYPE_INDEXED	88	long	0 - BOX Filter 1 - BILINEAR Filter 2 - BSPLINE Filter 3 - BICUBIC Filter 4 - CATMULLROM Filter 5 - LANCZOS3 Filter	3	SetOptionLong
NOVAPDF_DOWNSAMPLE_MONOCHROM	90	bool		false	SetOptionBool
NOVAPDF_DOWNSAMPLE_RES_MONOCHROM	92	long	72 - 2400	96	SetOptionLong
NOVAPDF_DOWNSAMPLE_TYPE_MONOCHROM	91	long	0 - BOX Filter	3	SetOptionLong

M			1 - BILINEAR Filter 2 - BSPLINE Filter 3 - BICUBIC Filter 4 - CATMULLROM Filter 5 - LANCZOS3 Filter		g
NOVAPDF_GR_CONVERT_ENABLE	10	bool		false	SetOptionBo ol
NOVAPDF_IMAGE_CONVERT_HIGH_COLOR	71	bool		false	SetOptionBo ol
NOVAPDF_IMAGE_CONVERT_INDEXED	76	bool		false	SetOptionBo ol
NOVAPDF_IMAGE_CONVERT_TYPE_HIGH_COLOR	73	long	0 - Grayscale 1 - Monochrome	0	SetOptionLon g
NOVAPDF_IMAGE_DITHER_HIGH_COLOR	72	bool		true	SetOptionBo ol
NOVAPDF_IMAGE_DITHER_TYPE_HIGH_C OLOR	75	long	0 - FS Dither 1 - BAYER4 Dither 2 - BAYER8 Dither 3 - ORDER6 Dither 4 - ORDER8 Dither 5 - ORDER16 Dither	0	SetOptionLon g
NOVAPDF_IMAGE_CONVERT_TYPE_INDEX ED	78	long	0 - Grayscale 1 - Monochrome	0	SetOptionLon g
NOVAPDF_IMAGE_DITHER_INDEXED	77	bool		true	SetOptionBo ol
NOVAPDF_IMAGE_DITHER_TYPE_INDEXE D	80	long	0 - FS Dither 1 - BAYER4 Dither 2 - BAYER8 Dither 3 - ORDER6 Dither 4 - ORDER8 Dither 5 - ORDER16 Dither	0	SetOptionLon g
NOVAPDF_IMAGE_CONVERT_TEXTANDGR	81	bool		false	SetOptionBo ol
NOVAPDF_IMAGE_CONVERT_TYPE_TEXTA NDGR	82	long	0 - Grayscale 1 - Monochrome	0	SetOptionLon g
NOVAPDF_IMAGE_CONVERT_TRESH_TEXT ANDGR	83	long	0-255	128	SetOptionLon g
NOVAPDF_IMAGE_CONVERT_TRESH_HIGH	74	long	0-255	128	SetOptionLon

_COLOR					g
NOVAPDF_IMAGE_CONVERT_TRESH_INDEXED	79	long	0-255	128	SetOptionLong

FONTS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_FONTS_EMBED_ALL_USED_FONTS	160	bool		false	SetOptionBoolean
NOVAPDF_FONTS_EMBED_SUBSETS	159	bool		true	SetOptionBoolean
NOVAPDF_FONTS_FORCE_EMBED_PROTECTED	161	bool		false	SetOptionBoolean

DOCUMENT INFO AND VIEWER OPTIONS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_INFO_ENABLE	7	bool		true	SetOptionBoolean
NOVAPDF_SHOW_DOCINFO_DLG	16	bool		false	SetOptionBoolean
NOVAPDF_DOCINFO_AUTHOR	69	string		[U]	SetOptionString
NOVAPDF_DOCINFO_CREATOR	67	string		[N]	SetOptionString
NOVAPDF_DOCINFO_KEYWORDS	70	string			SetOptionString
NOVAPDF_DOCINFO_SUBJECT	68	string			SetOptionString
NOVAPDF_DOCINFO_TITLE	66	string		[N]	SetOptionString
NOVAPDF_INFO_VIEWER_ENABLE	8	bool		true	SetOptionBoolean
NOVAPDF_VIEWOP_PAGE_LAYOUT	34	long	0 - Viewer default 1 - single page 2 - column 3 - two columns, left 4 - two columns, right	0	SetOptionLong

			5 - two pages, left 6 - two pages, right		
NOVAPDF_VIEWOP_PAGE_MODE	38	long	0 - Viewer default 1 - None 2 - show bookmarks panel 3 - show pages panel 4 - Full screen 5 - show layers panel 6 - show attachments panel;	0	SetOptionLong
NOVAPDF_VIEWOP_START_PAGE	33	long		true	SetOptionLong
NOVAPDF_VIEWOP_ZOOM	31	long	0 - Default viewer settings; 1 - Default 2 - Fit Width; 3 - Fit Height; 4 - Fit Page; 5 - Percent; 6 - Fit Visible	0	SetOptionLong
NOVAPDF_VIEWOP_USE_START_PAGE	32	bool		false	SetOptionBool
NOVAPDF_VIEWOP_PAGE_SCALING	40	long	0 - Application Default 1 - None	0	SetOptionLong
NOVAPDF_VIEWOP_HIDE_TOOLBARS	25	bool		false	SetOptionBool
NOVAPDF_VIEWOP_SHOW_DOCTITLE	26	bool		false	SetOptionBool
NOVAPDF_VIEWOP_TRANSITION_TYPE	27	long	0 - Viewer default 1 - Replace 2 - Split 3 - Blinds 4 - Box 5 - Wipe 6 - Dissolve 7 - Glitter 8 - Fly in 9 - Fly out	0	SetOptionLong

			10 - Push 11 - Cover 12 - Uncover 13 - Fade		
NOVAPDF_VIEWOP_TRANSITION_DIRECTION	28	long	0 - Horizontal 1 - vertical	0	SetOptionLong
NOVAPDF_VIEWOP_TRANSITION_DURATION	29	long		0	SetOptionLong
NOVAPDF_VIEWOP_PAGE_DURATION	30	long		0	SetOptionLong
NOVAPDF_VIEWOP_HIDE_MENUBAR	35	bool		false	SetOptionBool
NOVAPDF_VIEWOP_RESIZE_WINDOW	36	bool		false	SetOptionBool
NOVAPDF_VIEWOP_HIDE_USER	37	bool		false	SetOptionBool
NOVAPDF_VIEWOP_FULLSCREEN	39	long	0 - Viewer default 1 - None 2 - Bookmarks 3 - Pages 4 - Layers	0	SetOptionLong

SECURITY

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_SEC_ENABLE	13	bool		false	SetOptionBool
NOVAPDF_SHOW_SECURITY_DLG	15	bool		false	SetOptionBool
NOVAPDF_SECURITY_FLAG_PRINTDOC	112	bool		false	SetOptionBool
NOVAPDF_SECURITY_FLAG_MODIFYDOC	113	bool		false	SetOptionBool
NOVAPDF_SECURITY_FLAG_EXTRACTTEXT	114	bool		false	SetOptionBool
NOVAPDF_SECURITY_FLAG_MODIFYANNOTATION	115	bool		false	SetOptionBool
NOVAPDF_SECURITY_FLAG_ADVANCEDFILL	119	bool		false	SetOptionBool
NOVAPDF_SECURITY_FLAG_ADVANCEDEXTRACT	118	bool		false	SetOptionBool
NOVAPDF_SECURITY_FLAG_ASSEMBLEDDOC	117	bool		false	SetOptionBool

NOVAPDF_SECURITY_FLAG_PRINTHIGHRES	116	bool		false	SetOptionBool
NOVAPDF_SECURITY_USER_PASSWORD	110	string (encrypted)			SetOptionEncryptedString
NOVAPDF_SECURITY_OWNER_PASSWORD	111	string (encrypted)			SetOptionEncryptedString
NOVAPDF_SECURITY_LEVEL	109	int	1 - 40 bits RC4 2 - 128 bits RC4 3 - 128 bits AES 4 - 256 bits AES	4	SetOptionLong
NOVAPDF_SECURITY_ENCRYPT_XMP	262	bool		true	SetOptionBool

SIGNATURE

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_SIGN_CERTIFICATE_TYPE	131	long	1 - system certificate 2 - certificate file		SetOptionLong
NOVAPDF_SIGN_SYSCERT_ISSUEDTO	125	string			SetOptionString
NOVAPDF_SIGN_SYSCERT_ISSUEDBY	126	string			SetOptionString
NOVAPDF_SIGN_SYSCERT_FRIENDLYNAME	127	string			SetOptionString
NOVAPDF_SIGN_SYSCERT_SUBJECT	128	string			SetOptionString
NOVAPDF_SIGN_SYSCERT_SUBJECT_NAME	129	string			SetOptionString
NOVAPDF_SIGN_SYSCERT_EXPIRE_DATE	130	string			SetOptionString
NOVAPDF_SIGN_FILECERT_LOCATION	120	long	1 - Local 2 - Server	1	SetOptionLong
NOVAPDF_SIGN_FILECERT_FILE	121	string			SetOptionString
NOVAPDF_SIGN_FILECERT_FILE_PASSWORD	122	string (encrypted)			SetOptionEncryptedString

NOVAPDF_SIGN_FILECERT_USER_NAME	123	string			
NOVAPDF_SIGN_FILECERT_USER_PASSWORD	124	string (encrypted)			SetOptionEncryptedString
NOVAPDF_SIGN_SHOW_GRAPHIC_NAME	132	bool		true	SetOptionBool
NOVAPDF_SIGN_SHOW_GRAPHIC_IMAGE	133	bool		false	SetOptionBool
NOVAPDF_SIGN_IMAGE_LOCATION	148	long	1 - Local 2 - Server	1	SetOptionLong
NOVAPDF_SIGN_IMAGE_FILE	149	string			SetOptionString
NOVAPDF_SIGN_IMAGE_USER_NAME	150	string			SetOptionString
NOVAPDF_SIGN_IMAGE_USER_PASSWORD	151	string (encrypted)			SetOptionEncryptedString
NOVAPDF_SIGN_SHOW_KEEPPASPECTRATIO	134	bool		true	SetOptionBool
NOVAPDF_SIGN_IMAGE_OPACITY	152	long		100	SetOptionLong
NOVAPDF_SIGN_NAME_OPACITY	147	long		100	SetOptionLong
NOVAPDF_SIGN_SHOW_CERTIFICATE_NAME	135	bool		false	SetOptionBool
NOVAPDF_SIGN_SHOW_SIGN_DATE	136	bool		false	SetOptionBool
NOVAPDF_SIGN_SHOW_SIGN_LOCATION	139	bool		false	SetOptionBool
NOVAPDF_SIGN_SHOW_SIGN_REASON	138	bool		false	SetOptionBool
NOVAPDF_SIGN_SHOW_LABELS	141	bool		false	SetOptionBool
NOVAPDF_SIGN_SHOW_DETAILS	140	bool		true	SetOptionBool
NOVAPDF_SIGN_SHOW_CONTACT_INFO	137	bool		false	SetOptionBool
NOVAPDF_SIGN_FONT_NAME	142	string			SetOptionString
NOVAPDF_SIGN_FONT_TYPE	143	long	0 - TrueType 1 - Type1 2 - OpenType (TrueType) 3 - OpenType (Tpe1)	0	SetOptionLong
NOVAPDF_SIGN_CUSTOM_SIZE	145	bool		false	SetOptionBool
NOVAPDF_SIGN_FONT_SIZE	144	long		8	SetOptionLong
NOVAPDF_SIGN_NAME_COLOR	146	long	RGB color		SetOptionLong
NOVAPDF_SIGN_INFO_REASON	154	string			SetOptionString

NOVAPDF_SIGN_INFO_LOCATION	155	string			SetOptionString
NOVAPDF_SIGN_INFO_CONTACT	153	string			SetOptionString
NOVAPDF_SIGN_VIEW_VIEW	156	bool		true	SetOptionBool
NOVAPDF_SIGN_VIEW_PRINT	157	bool		true	SetOptionBool
NOVAPDF_SIGN_VIEW_EXPORT	158	bool		true	SetOptionBool

LINKS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_URL_ANALIZE	5	bool		true	SetOptionBool
NOVAPDF_URL_DETECT_FILES	163	bool		false	SetOptionBool
NOVAPDF_URL_UNDERLINE	166	bool		true	SetOptionBool
NOVAPDF_URL_OVERWRITE_COLOR	167	bool		false	SetOptionBool
NOVAPDF_URL_COLOR	168	long	RGB color		SetOptionLong
NOVAPDF_URL_CHECK_FILE_EXISTS	164	bool		false	SetOptionBool
NOVAPDF_URL_NEWTAB	169	bool		false	SetOptionBool

OVERLAY

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_OVERLAY_FILE	93	string			SetOverlayOptionString
NOVAPDF_OVERLAY_FILE_LOCATION	96	long	1 - Local 2 - Server	1	SetOverlayOptionLong
NOVAPDF_OVERLAY_FILE_PASSWORD	97	string (encrypted)	password for the overlay PDF file, if encrypted		SetOverlayOptionEncryptedString
NOVAPDF_OVERLAY_USER_NAME	94	string	user name for network path		SetOverlayOptionString
NOVAPDF_OVERLAY_USER_PASSWORD	95	string (encrypted)	user password		SetOverlayOptionEncryptedString
NOVAPDF_OVERLAY_REPEAT_TYPE	99	long	0 - no repeat; 1 - repeat last page 2 - repeat all pages	0	SetOverlayOptionLong

NOVAPDF_OVERLAY_OPACITY	100	long		100	SetOverlayOptionLong
NOVAPDF_OVERLAY_NAME	362	string			SetOverlayOptionString
NOVAPDF_OVERLAY_AUTHOR	363	string			SetOverlayOptionString
NOVAPDF_OVERLAY_DESCRIPTION	364	string			SetOverlayOptionString

IMAGE WATERMARKS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_WTM_IMG_IMAGE_FILE_NAME	200	string			SetWatermarkImageOptionString
NOVAPDF_WTM_IMG_IMAGE_LOCATION	201	long	1 - Local 2 - Server	1	SetWatermarkImageOptionLong
NOVAPDF_WTM_IMG_IMAGE_USER_NAME	202	string	user name for network path		SetWatermarkImageOptionString
NOVAPDF_WTM_IMG_IMAGE_USER_PASSWORD	203	string (encrypted)	user password		SetWatermarkImageOptionEncryptedString
NOVAPDF_WTM_IMG_IMAGE_TRANSPARENCY	204	bool		false	SetWatermarkImageOptionBool
NOVAPDF_WTM_IMG_IMAGE_TRANSP_COLOR	205	long	RGB color	0	SetWatermarkImageOptionLong
NOVAPDF_WTM_IMG_IMAGE_OPACITY	206	long		100	SetWatermarkImageOptionLong
NOVAPDF_WTM_IMG_COLOR_VARIATION	207	long		0	SetWatermarkImageOptionLong
NOVAPDF_WTM_IMG_VISIBILITY_VIEW	208	bool		true	SetWatermarkImageOptionBool
NOVAPDF_WTM_IMG_VISIBILITY_PRINT	209	bool		true	SetWatermarkImageOptionBool
NOVAPDF_WTM_IMG_VISIBILITY_EXPORT	210	bool		true	SetWatermarkImageOptionBool
NOVAPDF_WTM_IMG_NAME	211	string			SetWatermarkImageOptionString
NOVAPDF_WTM_IMG_AUTHOR	212	string			SetWatermarkImageOptionString
NOVAPDF_WTM_IMG_DESCRIPTION	213	string			SetWatermarkImageOptionString

ON					ng
----	--	--	--	--	----

TEXT WATERMARKS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_WTM_TXT_WATERMARK_TEXT	240	string			SetWatermarkTextOptionString
NOVAPDF_WTM_TXT_FONT_NAME	241	string			SetWatermarkTextOptionString
NOVAPDF_WTM_TXT_FONT_TYPE	242	long	0 - TrueType 1 - Type1 2 - OpenType (TrueType) 3 - OpenType (Tpe1)	0	SetWatermarkTextOptionLong
NOVAPDF_WTM_TXT_FONT_SIZE	243	long			SetWatermarkTextOptionLong
NOVAPDF_WTM_TXT_FONT_BOLD	244	bool		false	SetWatermarkTextOptionBool
NOVAPDF_WTM_TXT_FONT_ITALIC	245	bool		false	SetWatermarkTextOptionBool
NOVAPDF_WTM_TXT_FONT_OUTLINE	246	bool		false	SetWatermarkTextOptionBool
NOVAPDF_WTM_TXT_FONT_UNDERLINE	247	bool		false	SetWatermarkTextOptionBool
NOVAPDF_WTM_TXT_FONT_COLOR	248	long	RGB color		SetWatermarkTextOptionLong
NOVAPDF_WTM_TXT_OPACITY	249	long	1-100	100	SetWatermarkTextOptionLong
NOVAPDF_WTM_IMG_VISIBILITY_VIEW	250	bool		true	SetWatermarkTextOptionBool
NOVAPDF_WTM_IMG_VISIBILITY_PRINT	251	bool		true	SetWatermarkTextOptionBool
NOVAPDF_WTM_IMG_VISIBILITY_EXPORT	252	bool		true	SetWatermarkTextOptionBool
NOVAPDF_WTM_TXT_UNDERLINE_POSITION	253	float		0	SetWatermarkTextOptionFloat
NOVAPDF_WTM_TXT_UNDERLINE_THICKNESS	254	float		0	SetWatermarkTextOptionFloat
NOVAPDF_WTM_TXT_TEXT_CORRECTION	255	float		0	SetWatermarkTextOptionFloat

NOVAPDF_WTM_TXT_NAME	256	string			SetWatermarkTextOptionString
NOVAPDF_WTM_TXT_AUTHOR	257	string			SetWatermarkTextOptionString
NOVAPDF_WTM_TXT_DESCRIPTION	258	string			SetWatermarkTextOptionString

BOOKMARKS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_BMARK_EN_AUTO_DET_BMARKS	12	int		false	SetOptionLong
NOVAPDF_BMK_ALLOW_MULTILINE	280	bool		true	SetOptionBool
NOVAPDF_BMK_MATCH_ALL_LEVELS	281	bool		true	SetOptionBool
NOVAPDF_BMK_USE_LEVELS	282	int		3	SetOptionLong
NOVAPDF_BMK_OPEN_TO_LEVEL	283	int		1	SetOptionLong
NOVAPDF_BMK_ROOT_NAME	284	string			SetOptionString
NOVAPDF_BMK_ROOT_ENABLED	285	bool		false	SetOptionBool
NOVAPDF_BMK_ROOT_BOLD	286	bool		false	SetOptionBool
NOVAPDF_BMK_ROOT_ITALIC	287	bool		false	SetOptionBool
NOVAPDF_BMK_ROOT_COLOR	288	int			SetOptionLong

SAVE

Constant name	Value	Type	Possible values	Default value	
NOVAPDF_SAVE_PROMPT_TYPE	101	long	0 - standard dialog 1 - no dialog 2 - simple OS dialog	0	SetOptionLong
NOVAPDF_SAVE_FOLDER_TYPE	260	long	1 - Printing applications's current folder 2 - last folder 3 - custom folder 4 - User's My Documents folder	4	SetOptionLong
NOVAPDF_SAVE_FOLDER	103	string			SetOptionString
NOVAPDF_SAVE_USER_NAME	105	string	network user name		SetOptionString

NOVAPDF_SAVE_USER_PASSWORD	106	string (encrypted)	network user password		SetOptionEncryptedString
NOVAPDF_SAVE_FILE_NAME	104	string	save file name or a valid macro	[N]	SetOptionString
NOVAPDF_SAVE_FILEEXIST_ACTION	108	long	0 - prompt save as dialog; 1 - autonumber new; 2 - append date-time; 3 - overwrite; 4 - auto number existing files; 7 - don't save file	0	SetOptionLong

LAYOUT

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_LAYOUT_LEFTANCHOR_USED	320	bool		true	SetLayoutOptionBool
NOVAPDF_LAYOUT_LEFTANCHOR_OFFSET	321	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_LEFTANCHOR_USE_PERCENT	322	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_RIGHTANCHOR_USED	323	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_RIGHTANCHOR_OFFSET	324	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_RIGHTANCHOR_USE_PERCENT	325	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_TOPANCHOR_USED	326	bool		true	SetLayoutOptionBool
NOVAPDF_LAYOUT_TOPANCHOR_OFFSET	327	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_TOPANCHOR_USE_PERCENT	328	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_BOTTOMANCHOR_USED	329	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_BOTTOMANCHOR_OFFSET	330	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_BOTTOMANCHOR_USE_PERCENT	331	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_VERTANCHOR_USED	332	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_VERTANCHOR_OFFSET	333	float		0	SetLayoutOptionFloat

NOVAPDF_LAYOUT_VERTANCHOR_USE_PERCENT	334	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_HORIZANCHOR_USED	335	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_HORIZANCHOR_OFFSET	336	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_HORIZANCHOR_USE_PERCENT	337	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_USE_ASPECT_RATIO	338	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_WIDTH	339	float			SetLayoutOptionFloat
NOVAPDF_LAYOUT_HEIGHT	340	float			SetLayoutOptionFloat
NOVAPDF_LAYOUT_ROTATION	341	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_UNITS	342	long	0 - Millimeters 1 - Centimeters 2 - Inches	0	SetLayoutOptionLong
NOVAPDF_LAYOUT_PAGERANGE	349	string	"1-2"		SetLayoutOptionString
NOVAPDF_LAYOUT_ZINDEX	350	long	multiple of 5	-1	SetLayoutOptionLong
NOVAPDF_LAYOUT_FORM_WIDTH	351	float		210000	SetLayoutOptionFloat
NOVAPDF_LAYOUT_FORM_HEIGHT	352	float		297000	SetLayoutOptionFloat
NOVAPDF_LAYOUT_BOUNDING_WIDTH	353	float		1	SetLayoutOptionFloat
NOVAPDF_LAYOUT_BOUNDING_HEIGHT	354	float		1	SetLayoutOptionFloat
NOVAPDF_LAYOUT_ORIGINAL_WIDTH	355	float		210000	SetLayoutOptionFloat
NOVAPDF_LAYOUT_ORIGINAL_HEIGHT	356	float		297000	SetLayoutOptionFloat
NOVAPDF_LAYOUT_SCALE_X	360	float		1	SetLayoutOptionFloat
NOVAPDF_LAYOUT_SCALE_Y	361	float		1	SetLayoutOptionFloat
NOVAPDF_LAYOUT_ALLOW_STRETCH	386	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_USE_BORDER	380	bool		false	SetLayoutOptionBool
NOVAPDF_LAYOUT_BORDER_STYLE	382	long	0 - Solid 1 - Dashed	0	SetLayoutOptionLong
NOVAPDF_LAYOUT_BORDER_WIDTH	383	long		1000	SetLayoutOptionLong
NOVAPDF_LAYOUT_BORDER_COLOR	384	long	RGB color	0	SetLayoutOptionLong
NOVAPDF_LAYOUT_BORDER_POSITION	385	long	0 - Neutral 1 - Interior 2 - Exterior	0	SetLayoutOptionLong

NOVAPDF_LAYOUT_NAME	357	string			SetLayoutOptionString
NOVAPDF_LAYOUT_AUTHOR	358	string			SetLayoutOptionString
NOVAPDF_LAYOUT_DESCRIPTION	359	string			SetLayoutOptionString
NOVAPDF_LAYOUT_ALLOW_STRETCH	386	bool		true	SetLayoutOptionBool
NOVAPDF_LAYOUT_OBJECT_WIDTH	393	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_OBJECT_HEIGHT	394	float		0	SetLayoutOptionFloat
NOVAPDF_LAYOUT_PAGE_VISIBILITY	397	long	0 - First page 1 - Last page 2 - Odd pages 3 - Even pages 4 - All pages 5 - Page range 6 - Form 7 - Landscape 8 - Portrait	4	SetLayoutOptionLong
NOVAPDF_LAYOUT_PAGE_FORM_HEIGHT	398	float		210000	SetLayoutOptionFloat
NOVAPDF_LAYOUT_PAGE_FORM_WIDTH	399	float		297000	SetLayoutOptionFloat
NOVAPDF_LAYOUT_PAGE_FORM_ID	400	long	DMPAPER sizes	9 (A4)	SetLayoutOptionLong

ADVANCED OPTIONS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_ADV_OPTIMIZE_TEXT	48	bool		true	SetOptionBool
NOVAPDF_ADV_SILENT_PRINT	49	bool		false	SetOptionBool
NOVAPDF_ADV_OPTIMIZE_IMAGE	50	bool		false	SetOptionBool
NOVAPDF_ADV_CORRECT_LINEWIDTH	51	bool		false	SetOptionBool
NOVAPDF_ADV_CORRECT_FILLCOLOR	52	bool		false	SetOptionBool
NOVAPDF_ADV_IGNORE_EMPTY_PAGES	53	bool		false	SetOptionBool
NOVAPDF_ADV_VERIFY_FILE	621	bool		true	SetOptionBool
NOVAPDF_ADV_COPIES_ADD_PAGE	622	bool		false	SetOptionBool

NOVAPDF_ADV_COPIES_ONLY_ODD	623	bool		false	SetOptionBool
-----------------------------	-----	------	--	-------	---------------

ACTIONS - RUN APPLICATION

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_ACTION_RUN_APPLICATION	43	string			SetActionOptionString
NOVAPDF_ACTION_RUN_USER_NAME	45	string			SetActionOptionString
NOVAPDF_ACTION_RUN_USER_PASSWORD	46	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_ACTION_RUN_CMDLINE_PARAMETERS	47	string	%1 - pdf file name %2 - process name	%1	SetActionOptionString
NOVAPDF_ACTION_RUN_SHOW	640	long	0 - Normal 1 - Minimized 2 - Hidden	0	SetActionOptionLong
NOVAPDF_ACTION_RUN_SHELL	641	bool		true	SetActionOptionBool

ACTIONS - OPEN VIEWER

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_ACTION_OPEN_CUSTOM_SOURCE	460	string			SetActionOptionString
NOVAPDF_ACTION_OPEN_OPENORIGINAL	461	bool		true	SetActionOptionBool
NOVAPDF_ACTION_OPEN_USERNAME	462	string			SetActionOptionString
NOVAPDF_ACTION_OPEN_PASSWORD	463	string (encrypted)			SetActionOptionEncryptedString

ACTIONS - DELETE

Constant name	Value	Type	Possible values	Default	
---------------	-------	------	-----------------	---------	--

NOVAPDF_ACTION_DELETE_CUSTOMSOURCE	464	string			SetActionOptionString
NOVAPDF_ACTION_DELETE_DELETEORIGINAL	465	bool		true	SetActionOptionBool
NOVAPDF_ACTION_DELETE_USERNAME	466	string			SetActionOptionString
NOVAPDF_ACTION_DELETE_PASSWORD	467	string (encrypted)			SetActionOptionEncryptedString

ACTIONS - COPY

Constant name	Value	Type	Possible values	Default	
NOVAPDF_ACTION_COPY_CUSTOMSOURCE	468	string			SetActionOptionString
NOVAPDF_ACTION_COPY_SOURCECOPYORIGINAL	469	bool		true	SetActionOptionBool
NOVAPDF_ACTION_COPY_DESTCOPYORIGINAL	470	bool		true	SetActionOptionBool
NOVAPDF_ACTION_COPY_CUSTOMDESTFOLDER	471	string			SetActionOptionString
NOVAPDF_ACTION_COPY_CUSTOMDESTFILE	472	string			SetActionOptionString
NOVAPDF_ACTION_COPY_SOURCEUSERNAME	473	string			SetActionOptionString
NOVAPDF_ACTION_COPY_SOURCEPASSWORD	474	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_ACTION_COPY_DESTUSERNAME	475	string			SetActionOptionString
NOVAPDF_ACTION_COPY_DESTPASSWORD	476	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_ACTION_COPY_DESTKEEPFILENAME	477	bool		false	SetActionOptionBool

ACTIONS - EMAIL MAPI

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_EMAILMAPI_SENDEMAIL	421	long	0 - Send with default email	1	SetActionOptionLong

			client 1 - Open default email		
NOVAPDF_EMAILAPI_FROM	422	string			SetActionOptionString
NOVAPDF_EMAILAPI_TO	423	string			SetActionOptionString
NOVAPDF_EMAILAPI_CC	424	string			SetActionOptionString
NOVAPDF_EMAILAPI_BCC	425	string			SetActionOptionString
NOVAPDF_EMAILAPI_COMPRESS	426	bool		false	SetActionOptionBool
NOVAPDF_EMAILAPI_PASSWORDPROTECT	670	bool			SetActionOptionBool
NOVAPDF_EMAILAPI_ZIPPASSWORD	671	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_EMAILAPI_CHANGEEXTENSION	427	bool		false	SetActionOptionBool
NOVAPDF_EMAILAPI_ATTACH_PDF	428	bool		true	SetActionOptionBool
NOVAPDF_EMAILAPI_LOOKUP_ADDRESS	430	bool		true	SetActionOptionBool
NOVAPDF_EMAILAPI_ATTACH_OTHER_FILES	431	bool		false	SetActionOptionBool
NOVAPDF_EMAILAPI_OTHER_FILES	432	string			SetActionOptionString
NOVAPDF_EMAILAPI_SUBJECT	433	string			SetActionOptionString
NOVAPDF_EMAILAPI_BODY	434	string			SetActionOptionString
NOVAPDF_EMAILAPI_EXTENSION	435	string			SetActionOptionString

ACTIONS - EMAIL OUTLOOK

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_OUTLOOK_IMPORTANCE	645	long	0 - Low 1 - Normal 2 - High	1	SetActionOptionLong
NOVAPDF_OUTLOOK_READRECEIPT	646	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_NOFORWARD	647	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_NOREPLY	648	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_NOREPLYALL	649	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_SHOWWINDOW	650	bool		true	SetActionOptionBool
NOVAPDF_OUTLOOK_DELETEAFTERSEND	651	bool		false	SetActionOptionBool

NOVAPDF_OUTLOOK_CATEGORY	652	string			SetActionOptionString
NOVAPDF_OUTLOOK_PASSWORDPROTECT	653	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_ZIPPASSWORD	654	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_OUTLOOK_COMPRESS	655	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_CHANGEEXTENSION	656	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_ATTACH_PDF	657	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_LOOKUP_ADDRESS	658	bool		true	SetActionOptionBool
NOVAPDF_OUTLOOK_ATTACH_OTHER_FILES	659	bool		false	SetActionOptionBool
NOVAPDF_OUTLOOK_OTHER_FILES	660	string			SetActionOptionString
NOVAPDF_OUTLOOK_SUBJECT	661	string			SetActionOptionString
NOVAPDF_OUTLOOK_BODY	662	string			SetActionOptionString
NOVAPDF_OUTLOOK_FROM	663	string			SetActionOptionString
NOVAPDF_OUTLOOK_TO	664	string			SetActionOptionString
NOVAPDF_OUTLOOK_CC	665	string			SetActionOptionString
NOVAPDF_OUTLOOK_BCC	666	string			SetActionOptionString
NOVAPDF_OUTLOOK_EXTENSION	667	string			SetActionOptionString

ACTIONS - EMAIL SMTP

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_EMAILSMTP_FROM	436	string			SetActionOptionString
NOVAPDF_EMAILSMTP_TO	437	string			SetActionOptionString
NOVAPDF_EMAILSMTP_CC	438	string			SetActionOptionString
NOVAPDF_EMAILSMTP_BCC	439	string			SetActionOptionString
NOVAPDF_EMAILSMTP_COMPRESS	440	bool		false	SetActionOptionBool
NOVAPDF_EMAILSMTP_PASSWORDPROTECT	668	bool			SetActionOptionBool
NOVAPDF_EMAILSMTP_ZIPPASSWORD	669	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_EMAILSMTP_CHANGEEXTENSION	441	bool		false	SetActionOptionBool

NOVAPDF_EMAILSMTP_ATTACH_PDF	442	bool		true	SetActionOptionBool
NOVAPDF_EMAILSMTP_ATTACH_OTHER_FILES	445	bool		false	SetActionOptionBool
NOVAPDF_EMAILSMTP_OTHER_FILES	446	string			SetActionOptionString
NOVAPDF_EMAILSMTP_SUBJECT	447	string			SetActionOptionString
NOVAPDF_EMAILSMTP_BODY	448	string			SetActionOptionString
NOVAPDF_EMAILSMTP_EXTENSION	449	string			SetActionOptionString
NOVAPDF_EMAILSMTP_SERVER	450	string			SetActionOptionString
NOVAPDF_EMAILSMTP_PORT	451	string			SetActionOptionString
NOVAPDF_EMAILSMTP_SSL	452	bool		false	SetActionOptionBool
NOVAPDF_EMAILSMTP_AUTHENTICATION	453	bool		false	SetActionOptionBool
NOVAPDF_EMAILSMTP_ACCOUNT	454	string			SetActionOptionString
NOVAPDF_EMAILSMTP_PASSWORD	455	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_EMAILSMTP_TLS	456	bool		false	SetActionOptionBool

ACTIONS - FTP

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_ACTION_FTP_SOURCEFILE	480	string			SetActionOptionString
NOVAPDF_ACTION_FTP_SOURCEUSER	481	string			SetActionOptionString
NOVAPDF_ACTION_FTP_SOURCEPASSWORD	482	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_ACTION_FTP_DESTFOLDER	483	string			SetActionOptionString
NOVAPDF_ACTION_FTP_DESTFILE	484	string			SetActionOptionString
NOVAPDF_ACTION_FTP_SERVER	485	string			SetActionOptionString
NOVAPDF_ACTION_FTP_PORT	486	string		21	SetActionOptionString
NOVAPDF_ACTION_FTP_USERNAME	487	string			SetActionOptionString
NOVAPDF_ACTION_FTP_PASSWORD	488	string (encrypted)			SetActionOptionEncryptedString

		ed)			
NOVAPDF_ACTION_FTP_UPLOADS PEEDCHECK	489	bool		false	SetActionOptionBool
NOVAPDF_ACTION_FTP_UPLOADS PEED	490	long		200	SetActionOptionLong
NOVAPDF_ACTION_FTP_USEPASS IVEMODE	491	bool		false	SetActionOptionBool
NOVAPDF_ACTION_FTP_TIMEOUT	492	long		30	SetActionOptionLong
NOVAPDF_ACTION_FTP_HOST	493	string			SetActionOptionString
NOVAPDF_ACTION_FTP_HOSTPOR T	494	string		80	SetActionOptionString
NOVAPDF_ACTION_FTP_HOSTUSE RNAME	495	string			SetActionOptionString
NOVAPDF_ACTION_FTP_HOSTPAS SWORD	496	string (encrypt ed)			SetActionOptionEncrypte dString
NOVAPDF_ACTION_FTP_RETRY	497	bool		true	SetActionOptionBool
NOVAPDF_ACTION_FTP_RETRYVA LUE	498	long		1	SetActionOptionLong
NOVAPDF_ACTION_FTP_WAIT	499	bool		false	SetActionOptionBool
NOVAPDF_ACTION_FTP_WAITVAL UE	500	long		60	SetActionOptionLong
NOVAPDF_ACTION_FTP_SSL	501	bool		false	SetActionOptionBool
NOVAPDF_ACTION_FTP_USEPROX Y	502	bool		false	SetActionOptionBool
NOVAPDF_ACTION_FTP_SOURCEO RIGINAL	503	bool		true	SetActionOptionBool
NOVAPDF_ACTION_FTP_KEEPPIL ENAME	504	bool		true	SetActionOptionBool

ACTIONS - SFTP

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_ACTION_SFTP_SOURCEORIGINAL	510	bool		true	
NOVAPDF_ACTION_SFTP_SOURCEFILE	511	string			SetActionOptionString
NOVAPDF_ACTION_SFTP_SOURCEUSER	512	string			SetActionOptionString
NOVAPDF_ACTION_SFTP_SOURCEPASSWORD	513	string (encrypt ed)			SetActionOptionEncrypte dString

NOVAPDF_ACTION_SFTP_DESTFOLDER	514	string			SetActionOptionString
NOVAPDF_ACTION_SFTP_DESTFILE	515	string			SetActionOptionString
NOVAPDF_ACTION_SFTP_SERVER	516	string			SetActionOptionString
NOVAPDF_ACTION_SFTP_PORT	517	string		22	SetActionOptionString
NOVAPDF_ACTION_SFTP_USERNAME	518	string			SetActionOptionString
NOVAPDF_ACTION_SFTP_PASSWORD	519	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_ACTION_SFTP_USEPRIVATEKEY	520	bool		false	SetActionOptionBool
NOVAPDF_ACTION_SFTP_UPLOADSPEDCHECK	521	bool		false	SetActionOptionBool
NOVAPDF_ACTION_SFTP_UPLOADSPEED	522	long		200	SetActionOptionLong
NOVAPDF_ACTION_SFTP_TIMEOUT	528	long		30	SetActionOptionLong
NOVAPDF_ACTION_SFTP_KEYFILENAME	530	string			SetActionOptionString
NOVAPDF_ACTION_SFTP_KEYFILEPASSWORD	531	string (encrypted)			SetActionOptionEncryptedString
NOVAPDF_ACTION_SFTP_KEEPPFILENAME	532	string		true	SetActionOptionString
NOVAPDF_ACTION_SFTP_RETRY	533	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_RETRYVALUE	534	long		1	SetActionOptionLong
NOVAPDF_ACTION_SFTP_WAIT	535	bool		false	SetActionOptionBool
NOVAPDF_ACTION_SFTP_WAITVALUE	536	long		60	SetActionOptionLong
NOVAPDF_ACTION_SFTP_AUTH_PUBLICKEY	541	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_AUTH_PASSWORD	542	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_AUTH_KEYBOARDINT	543	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_AES256CTR	550	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_3DESCBC	551	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_AES128CBC	552	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_AES	553	bool		true	SetActionOptionBool

192CBC					
NOVAPDF_ACTION_SFTP_CIPHER_AES 256CBC	554	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_BLO WFISHCBC	555	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_TW OFISHCBC	556	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_TW OFISH192CBC	557	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_TW OFISH128CBC	558	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_TW OFISH256CBC	559	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_ARC FOUR	560	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_ARC FOUR128	561	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_ARC FOUR256	562	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_CAS T128CBC	563	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_AES 128CTR	564	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_CIPHER_AES 192CTR	565	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_MD5	570	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_SHA1	571	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_SHA22 56	572	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_SHA22 5696	573	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_RIPEM D160	574	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_RIPEM D160OPENS	575	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_MD596	576	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_MAC_SHA19 6	577	bool		true	SetActionOptionBool
NOVAPDF_ACTION_SFTP_COMPRESS_	580	bool		true	SetActionOptionBool

NONE					
NOVAPDF_ACTION_SFTP_COMPRESS_ZLIBOPENSSEH	581	bool		true	SetActionOptionBool

GENERAL ACTION SETTINGS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_ACTION_INDEX	600	long			SetActionOptionLong
NOVAPDF_ACTION_FAIL	601	long	0 - Continue 1 - Stop	1	SetActionOptionLong
NOVAPDF_ACTION_NAME	602	string			SetActionOptionString
NOVAPDF_ACTION_SHOW_DIALOG	603	bool		false	SetActionOptionBool
NOVAPDF_ACTION_EXECUTE	604	bool		true	SetActionOptionBool

XMP METADATA

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_DOCINFO_METADATA	618	bool		false	SetOptionBool
NOVAPDF_COPYRIGHT_METADATA	17	bool		false	SetOptionBool
NOVAPDF_COPYRIGHT_TEXT	611	string			SetOptionString
NOVAPDF_COPYRIGHT_URL	612	string			SetOptionString
NOVAPDF_COPYRIGHT_TYPE	613	long	0 - Unknown 1 - Copyrighted 2 - Public domain	0	SetOptionLong
NOVAPDF_CUSTOMPROP_METADATA	20	bool		false	SetOptionBool

MERGE

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_MERGE_ENABLE	18	bool		false	SetOptionBool

NOVAPDF_SHOW_MERGE_DLG	19	bool		false	SetOptionBool
NOVAPDF_MERGE_APPEND_PASSWORD	107	string (encrypted)			SetOptionEncryptedString
NOVAPDF_MERGE_INSERT_PAGE_NO	261	long		1	SetOptionLong
NOVAPDF_MERGE_IF_FILE_EXISTS	630	bool		true	SetOptionBool
NOVAPDF_MERGE_TYPE	631	long	0 - Append end 1 - Insert beginning 2 - Insert at page no	0	SetOptionLong
NOVAPDF_MERGE_OTHER_FILE	632	string			SetOptionString
NOVAPDF_MERGE_LOCATION	633	long	1 - Local 2 - Server	1	SetOptionLong
NOVAPDF_MERGE_USER	634	string			SetOptionString
NOVAPDF_MERGE_PASSWORD	635	string (encrypted)			SetOptionEncryptedString

GENERAL PROFILE SETTINGS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_PROFILE_NAME	22	string			SetOptionString
NOVAPDF_PROFILE_AUTHOR	23	string			SetOptionString
NOVAPDF_PROFILE_DESCRIPTION	24	string			SetOptionString
NOVAPDF_SAVE_LOCATION	14	long	1 - Local 2 - Server	1	SetOptionLong
NOVAPDF_PDF_VERSION	1	long	3 - PDF 1.3 (Adobe Reader 4) 4 - PDF 1.4 (Adobe Reader 5) 5 - PDF 1.5 (Adobe Reader 6) 6 - PDF 1.6 (Adobe Reader 7) 7 - PDF 1.7 (Adobe Reader 8)	5	SetOptionLong
NOVAPDF_PDFA	2	bool		false	SetOptionBool
NOVAPDF_PDFA_VERSION	3	long	1 - PDFA\1a	2	SetOptionLong

			2 - PDF/A\1b		
NOVAPDF_PDF_LINEARIZE	4	bool		false	SetOptionBool
NOVAPDF_ENABLE_SAVE_RULES	690	bool		true	SetOptionBool

USER TAGS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_ENABLE_USER_TAGS	21	bool		false	SetOptionBool
NOVAPDF_USERTAG_REMOVE_POLICY	672	long			SetOptionLong
NOVAPDF_USERTAG_DETECT_FONTNAME	673	bool		false	SetOptionBool
NOVAPDF_USERTAG_FONTNAME	674	string			SetOptionString
NOVAPDF_USERTAG_FONTTYPE	675	long	0 - TrueType 1 - Type1 2 - OpenType (TrueType) 3 - OpenType (Tpe1)	0	SetOptionLong
NOVAPDF_USERTAG_DETECT_SIZE	676	bool		false	SetOptionBool
NOVAPDF_USERTAG_SIZE	677	long			SetOptionLong
NOVAPDF_USERTAG_MARGIN	678	float			SetOptionFloat
NOVAPDF_USERTAG_DETECT_STYLE	679	bool		false	SetOptionBool
NOVAPDF_USERTAG_BOLD	680	bool		false	SetOptionBool
NOVAPDF_USERTAG_ITALIC	681	bool		false	SetOptionBool
NOVAPDF_USERTAG_DETECT_COLOR	682	bool		false	SetOptionBool
NOVAPDF_USERTAG_COLOR	683	long	RGB color		SetOptionLong

PRINTER OPTIONS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_PRINTER_SELECT_PROFILE_DL	802	bool		false	SetPrinterOption

OVERRIDE OPTIONS

Constant name	Value	Type	Possible values	Default	Function
NOVAPDF_OVERRIDE_OPEN_VIEWER	2001	bool			SetOverrideOptionBool
NOVAPDF_OVERRIDE_SEND_EMAIL	2002	bool			SetOverrideOptionBool
NOVAPDF_OVERRIDE_MERGE_PDF	2003	bool			SetOverrideOptionBool
NOVAPDF_OVERRIDE_MERGE_FILE_TYPE	2004	long	0 - Existig file 1- Other file		SetOverrideOptionLong
NOVAPDF_OVERRIDE_MERGE_TYPE	2005	long	0 - Append 1 - Insert 2 - Insert at pag. no		SetOverrideOptionLong
NOVAPDF_OVERRIDE_MERGE_FILE	2006	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_INSERT_PAGENO	2007	long			SetOverrideOptionLong
NOVAPDF_OVERRIDE_PDF_PASSWORD	2008	string (encrypted)			SetOverrideOptionEncryptedString
NOVAPDF_OVERRIDE_DOC_INFO	2009	bool			SetOverrideOptionBool
NOVAPDF_OVERRIDE_SECURITY	2010	bool			SetOverrideOptionBool
NOVAPDF_OVERRIDE_SECURITY_U	2011	string (encrypted)			SetOverrideOptionEncryptedString
NOVAPDF_OVERRIDE_SECURITY_O	2012	string (encrypted)			SetOverrideOptionEncryptedString
NOVAPDF_OVERRIDE_DOC_TITLE	2013	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_DOC_SUBJECT	2014	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_DOC_AUTHOR	2015	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_DOC_KEY	2016	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_DOC_CREATOR	2017	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_REC_TO	2018	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_REC_FROM	2019	string			SetOverrideOptionString

NOVAPDF_OVERRIDE_REC_CC	2020	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_REC_BCC	2021	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_EMBEDFONTS	2022	bool			SetOverrideOptionBool
NOVAPDF_OVERRIDE_COMPRESSION	2023	long	0 - Medium 1 - High Quality 2 - Small file		SetOverrideOptionLong
NOVAPDF_OVERRIDE_SAVE_TYPE	2024	long	0 - Standard dlg 1 - No dialog 2 - Simple save dlg		SetOverrideOptionLong
NOVAPDF_OVERRIDE_SAVE_FOLDER	2025	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_SAVE_FILE	2026	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_SAVE_USER	2027	string			SetOverrideOptionString
NOVAPDF_OVERRIDE_SAVE_PASSWORD	2028	string (encrypted)			SetOverrideOptionEncryptedString
NOVAPDF_OVERRIDE_SAVE_CONFLICT	2029	long	0 - prompt save as dialog; 1 - autonumber new; 2 - append date-time; 3 - overwrite; 4 - auto number existing files; 7 - don't save file		SetOverrideOptionLong
NOVAPDF_OVERRIDE_SAVE_FOLDER_TYPE	2030	long	1- Application default 2 - Last folder 3 - Custom 4 - My Documents		SetOverrideOptionLong

1.4.11.2 Windows messages

novaPDF SDK 10 messages

Message name	Event	WPARAM	LPARAM
NOVAPDF2_STARTDOC	sent when the printer driver begins processing the print job	0	jobID

	and generating the PDF file		
NOVAPDF2_ENDDOC	sent when the printer driver finished processing the print job	0	jobID
NOVAPDF2_STARTPAGE	sent when the printer driver starts processing a new page	0	jobID
NOVAPDF2_ENDPAGE	sent when the printer driver finished processing a page	0	jobID
NOVAPDF2_FILESENT	sent when the printer driver finished generating the PDF file and sent it to the computer that started the print job	0	jobID
NOVAPDF2_FILESAVED	sent when the PDF file is received and saved by the computer that started the print job	0	jobID
NOVAPDF2_PRINTERERROR	sent when an error occurred during the print job	error no.	jobID
NOVAPDF2_EMAILSENT	sent when the email option is enabled and a email with the generated PDF file was sent	0	jobID
NOVAPDF2_EMAILERROR	sent when the email option is enabled and there was an error sending the email with the generated PDF file	0	jobID

The following error numbers are sent by the printer driver, in the NOVAPDF2_PRINTERERROR event:

- 1 - Error saving temporary PDF file on the printer server.
- 2 - Error reading license information on the printer server.
- 3 - Error generating the PDF file.
- 4 - Print job was canceled
- 5 - Licensing error: too many copies running with the same license
- 6 - Client computer is not licensed
- 7 - Error sending email
- 9 - Could not read printer info
- 10 - Could not read profile
- 11 - append pdf file - no or wrong password
- 12 - insert before pdf file - no or wrong password
- 13 - append pdf file - could not read file
- 14 - insert before pdf file - could not read file
- 15 - overlay pdf file - no or wrong password
- 16 - overlay pdf file - could not read file
- 18 - sign PDF - error signing
- 19 - sign PDF -error creating signature form
- 20 - sign PDF - image file not found

- 21 - image watermark - error drawing
- 22 - overlay - error drawing
- 25 - license error
- 26 - wrong parameters for action
- 27 - error creating folder
- 28 - error open viewer
- 29 - error run application
- 30 - file name error
- 31 - error copy file
- 32 - error delete file
- 33 - MAPI error
- 34 - SMTP error
- 35 - profile consistency error
- 36 - FTP error
- 37 - SFTP error
- 38 - error open file
- 39 - error pdf viewer
- 40 - access rights error
- 41 - open pdf error

How to register windows messages

You can register windows messages using RegisterWindowMessage function. Here are some samples of how to do it:

MFC Converter

VCL Converter

VB Converter

1.4.11.3 What is INovaPdfOptions

The INovaPdfOptions interface represents a COM object that allows the developers to set printing parameters for **novaPDF SDK 10**. This interface is derived from **IDispatch** interface directly.

This interface resides in the "novapi9.dll" module, that is distributed with the novaPDF SDK and is registered at install time.

INovaPdfOptions has next methods:

Initialization

Initialize

Initialize2

InitializeSilent

InitializeSilent2

Profiles Management

LoadProfile

LoadProfile2

SaveProfile

AddProfile
AddProfile2
CopyProfile
CopyProfile2
DeleteProfile
DeleteProfile2
GetFirstProfile
GetFirstProfile2
GetNextProfile
GetNextProfile2
GetActiveProfile
GetActiveProfile2
SetActiveProfile
SetActiveProfile2
SetPrinterActivePublicProfile
SetPrinterActivePublicProfile2
DeletePrinterActivePublicProfile
DeletePrinterActivePublicProfile2
SetPrinterPublicProfile
SetPrinterPublicProfile2
SetPrinterServerFlags
SetPrinterServerFlags2

Get / Set Profile Options

GetOptionString
GetOptionString2
SetOptionString
SetOptionString2
GetOptionLong
SetOptionLong
SetOptionBool
GetOptionBool
SetOptionEncryptedString
SetOptionEncryptedString2
GetOptionEncryptedString
GetOptionEncryptedString2

Actions options

AddAction
AddAction2
DeleteAction
DeleteAction2
GetActionCount
GetAction
GetAction2
GetActionOptionBool
GetActionOptionBool2
GetActionOptionEncryptedString
GetActionOptionEncryptedString2
GetActionOptionFloat

GetActionOptionFloat2
GetActionOptionLong
GetActionOptionLong2
GetActionOptionString
GetActionOptionString2
SetActionOptionBool
SetActionOptionBool2
SetActionOptionEncryptedString
SetActionOptionEncryptedString2
SetActionOptionFloat
SetActionOptionFloat2
SetActionOptionLong
SetActionOptionLong2
SetActionOptionString
SetActionOptionString2

Fonts options:

GetFontOption
GetFontOption2
SetFontOption
SetFontOption2
ClearFontOptions

Bookmarks options:

AddBookmarkDefinition
AddBookmarkDefinition2
ModifyBookmarkDefinition
ModifyBookmarkDefinition2
DeleteBookmarkDefinition
GetBookmarkDefinition
GetBookmarkDefinition2
GetBookmarkDefinitionCount
[****]

Image watermarks options:

AddWatermarkImage
AddWatermarkImage2
DeleteWatermarkImage
DeleteWatermarkImage2
GetWatermarkImage
GetWatermarkImage2
GetWatermarkImageCount
SetWatermarkImageOptionString
SetWatermarkImageOptionString2
SetWatermarkImageOptionLong
SetWatermarkImageOptionLong2
SetWatermarkImageOptionBool
SetWatermarkImageOptionBool2
SetWatermarkImageOptionFloat
SetWatermarkImageOptionFloat2
GetWatermarkImageOptionString
GetWatermarkImageOptionString2
GetWatermarkImageOptionLong
GetWatermarkImageOptionLong2

GetWatermarkImageOptionBool
GetWatermarkImageOptionBool2
GetWatermarkImageOptionFloat
GetWatermarkImageOptionFloat2
SetWatermarkImageOptionEncryptedString
SetWatermarkImageOptionEncryptedString2
GetWatermarkImageOptionEncryptedString
GetWatermarkImageOptionEncryptedString2

Text watermarks options:

AddWatermarkText
AddWatermarkText2
DeleteWatermarkText
DeleteWatermarkText2
GetWatermarkText
GetWatermarkText2
GetWatermarkTextCount
SetWatermarkTextOptionString
SetWatermarkTextOptionString2
SetWatermarkTextOptionLong
SetWatermarkTextOptionLong2
SetWatermarkTextOptionBool
SetWatermarkTextOptionBool2
SetWatermarkTextOptionFloat
SetWatermarkTextOptionFloat2
GetWatermarkTextOptionString
GetWatermarkTextOptionString2
GetWatermarkTextOptionLong
GetWatermarkTextOptionLong2
GetWatermarkTextOptionBool
GetWatermarkTextOptionBool2
GetWatermarkTextOptionFloat
GetWatermarkTextOptionFloat2

Layout options:

SetLayoutOptionString
SetLayoutOptionString2
SetLayoutOptionLong
SetLayoutOptionLong2
SetLayoutOptionBool
SetLayoutOptionBool2
SetLayoutOptionFloat
SetLayoutOptionFloat2
GetLayoutOptionString
GetLayoutOptionString2
GetLayoutOptionLong
GetLayoutOptionLong2
GetLayoutOptionBool
GetLayoutOptionBool2
GetLayoutOptionFloat
GetLayoutOptionFloat2
GetLayoutCount
GetLayoutCount2
GetLayout

GetLayout2
DeleteLayout
DeleteLayout2

Signature options:

GetSignature
GetSignature2

Overlay options:

AddOverlay
AddOverlay2
GetOverlay
GetOverlay2
DeleteOverlay
DeleteOverlay2
GetOverlayCount
SetOverlayOptionBool
SetOverlayOptionBool2
SetOverlayOptionEncryptedString
SetOverlayOptionEncryptedString2
SetOverlayOptionFloat
SetOverlayOptionFloat2
SetOverlayOptionLong
SetOverlayOptionLong2
SetOverlayOptionString
SetOverlayOptionString2
GetOverlayOptionBool
GetOverlayOptionBool2
GetOverlayOptionFloat
GetOverlayOptionFloat2
GetOverlayOptionLong
GetOverlayOptionLong2
GetOverlayOptionString
GetOverlayOptionString2
GetOverlayOptionEncryptedString
GetOverlayOptionEncryptedString2

Content options:

GetContentLayout
GetContentLayout2

Custom properties:

AddCustomProperty
AddCustomProperty2
SetCustomProperty
SetCustomProperty2
GetCustomProperty
GetCustomProperty2
DeleteCustomProperty
DisableCustomProperty
EnableCustomProperty
GetCustomPropertiesCount

User tags:

AddUserTag

AddUserTag2
SetUserTag
SetUserTag2
GetUserTag
GetUserTag2
DeleteUserTag
DisableUserTag
EnableUserTag
ClearUserTags
GetUserTagsCount

Save rules:

AddSaveRule
AddSaveRule2
GetSaveRule
GetSaveRule2
SetSaveRule
SetSaveRule2
DeleteSaveRule
DisableSaveRule
EnableSaveRule
ClearSaveRules
GetSaveRulesCount

Printers management

AddNovaPrinter
AddNovaPrinter2
AddNovaPrinterExt
AddNovaPrinterExt2
DeleteNovaPrinter
DeleteNovaPrinter2
SetPrinterOption
SetDefaultPrinter
RestoreDefaultPrinter

Register events or messages

RegisterEventWindow
UnRegisterEventWindow
RegisterNovaEvent
RegisterNovaEvent2
WaitForNovaEvent

OLE Licensing

InitializeOLEUsage
LicenseOLEServer

ShellExecute Licensing

LicenseShellExecuteFile

Print from launched applications

LicenseApplication

Convert Office documents

ConvertWordDocument
 ConvertWordDocument2
 ConvertPowerPointDocument
 ConvertPowerPointDocument2
 ConvertPublisherDocument
 ConvertPublisherDocument2
 ConvertVisioDocument
 ConvertVisioDocument2
 ConvertExcelDocument
 ConvertExcelDocument2

Override options

SetOverrideOptionBool
 SetOverrideOptionEncryptedString
 SetOverrideOptionEncryptedString2
 SetOverrideOptionLong
 SetOverrideOptionString
 SetOverrideOptionString2
 GetOverrideOptionBool
 GetOverrideOptionEncryptedString
 GetOverrideOptionEncryptedString2
 GetOverrideOptionLong
 GetOverrideOptionString
 GetOverrideOptionString2
 DeleteOverrideOptions

1.4.11.4 INovaPdfOptions**1.4.11.4.1 AddAction**

The **AddAction** method adds an action

```

HRESULT AddAction(
    [in] LONG p_nType,
    [in, string] LPCWSTR p_wsActionName,
    [out, string] LPWSTR* p_pwsNewActionId,
    [out] LONG* p_pnIndex
);
  
```

Parameters:

p_nType
 [in] action type (1-copy, 2- delete, 3 - MAPI email, 4 - SMTP email, 6 - open,
 p_wsActionName
 [in] action name
 p_pwsNewActionId
 [out] action id
 p_pnIndex
 [out] action index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong action type

Remarks:

This method adds a new action at the end of the list of actions. After adding an action. you can change action position in the list and set specific options for each action type.

1.4.11.4.2 AddAction2

The **AddAction2** method adds an action

```
HRESULT AddAction2(  
    [in] LONG p_nType,  
    [in, string] BSTR p_wsActionName,  
    [out, string] BSTR* p_pwsNewActionId,  
    [out] LONG* p_pnIndex  
);
```

Parameters:

p_nType
 [in] action type (1-copy, 2- delete, 3 - MAPI email, 4 - SMTP email, 6 - open,
p_wsActionName
 [in] action name
p_pwsNewActionId
 [out] action id
p_pnIndex
 [out] action index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong action type

Remarks:

This method adds a new action at the end of the list of actions. After adding an action. you can change action position in the list and set specific options for each action type.

1.4.11.4.3 AddBookmarkDefinition

The **AddBookmarkDefinition** method adds a new bookmark definition in the current loaded profile, having the characteristics specified by the method parameters.

```
HRESULT AddBookmarkDefinition(  
    [in] SHORT p_nHeading,
```

```

[in] BOOL p_bEnabled,
[in] BOOL p_bDetFont,
[in, string] LPCWSTR p_wsDetFont,
[in] LONG p_nDetFontType,
[in] BOOL p_bDetStyle,
[in] BOOL p_bDetBold,
[in] BOOL p_bDetItalic,
[in] BOOL p_bDetSize,
[in] INT p_nDetSizeVal,
[in] FLOAT p_nDetSizePt,
[in] BOOL p_bDetColor,
[in] LONG p_nDetColor,
[in] BOOL p_bDispAsBold,
[in] BOOL p_bDispAsItalic,
[in] LONG p_nDispColor,
[out] SHORT* p_nDefinition
);

```

Parameters:

p_nHeading
[in] heading index where to add the definition (1-9)

p_bEnabled
[in] definition is enabled

p_bDetFont
[in] detect font

p_wsDetFont
[in] font name

p_nDetFontType
[in] font type: true type, type1, open type

p_bDetStyle
[in] detect font style

p_bDetBold
[in] bold font

p_bDetItalic
[in] italic font

p_bDetSize
[in] detect font size

p_nDetSizeVal
[in] font size

p_nDetSizePt
[in] font size rounding

p_bDetColor
[in] detect font color

p_nDetColor
[in] font color (RGB value)

p_bDispAsBold
[in] display bookmark font bold

p_bDispAsItalic
[in] display bookmark font italic

p_nDispColor
[in] display bookmark font color

p_nDefinition

[out] definition index, if added. If the definition was not added, -1

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

There can be defined maximum 9 bookmark definitions.

1.4.11.4.4 AddBookmarkDefinition2

The **AddBookmarkDefinition2** method adds a new bookmark definition in the current loaded profile, having the characteristics specified by the method parameters.

```
HRESULT AddBookmarkDefinition2(
    [in] SHORT p_nHeading,
    [in] BOOL p_bEnabled,
    [in] BOOL p_bDetFont,
    [in, string] BSTR p_wsDetFont,
    [in] LONG p_nDetFontType,
    [in] BOOL p_bDetStyle,
    [in] BOOL p_bDetBold,
    [in] BOOL p_bDetItalic,
    [in] BOOL p_bDetSize,
    [in] INT p_nDetSizeVal,
    [in] FLOAT p_nDetSizePt,
    [in] BOOL p_bDetColor,
    [in] LONG p_nDetColor,
    [in] BOOL p_bDispAsBold,
    [in] BOOL p_bDispAsItalic,
    [in] LONG p_nDispColor,
    [out] SHORT* p_nDefinition
);
```

Parameters:

p_nHeading
 [in] heading index where to add the definition (1-9)
 p_bEnabled
 [in] definition is enabled
 p_bDetFont
 [in] detect font
 p_wsDetFont
 [in] font name
 p_nDetFontType
 [in] font type: true type, type1, open type
 p_bDetStyle
 [in] detect font style
 p_bDetBold
 [in] bold font

```

p_bDetItalic
    [in] italic font
p_bDetSize
    [in] detect font size
p_nDetSizeVal
    [in] font size
p_nDetSizePt
    [in] font size rounding
p_bDetColor
    [in] detect font color
p_nDetColor
    [in] font color (RGB value)
p_bDispAsBold
    [in] display bookmark font bold
p_bDispAsItalic
    [in] display bookmark font italic
p_nDispColor
    [in] display bookmark font color
p_nDefinition
    [out] definition index, if added. If the definition was not added, -1

```

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

There can be defined maximum 9 bookmark definitions.

1.4.11.4.5 AddCustomProperty

The **AddCustomProperty** method adds a custom property

```

HRESULT AddCustomProperty(
    [in, string] LPCWSTR p_wsPropertyName,
    [in, string] LPCWSTR p_wsPropertyValue,
    [in] BOOL p_bEnabled,
    [out] LONG* p_pnIndex
);

```

Parameters:

```

p_wsPropertyName
    [in] property name
p_wsDefaultValue
    [in] property value
p_bEnabled
    [in] flag, property is enabled
p_pnIndex
    [out] custom property index

```

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - empty property name

Remarks:

This method adds a new custom property at the end of the list.

1.4.11.4.6 AddCustomProperty2

The **AddCustomProperty2** method adds a custom property

```
HRESULT AddCustomProperty2(
    [in, string] BSTR p_wsPropertyName,
    [in, string] BSTR p_wsPropertyValue,
    [in] BOOL p_bEnabled,
    [out] LONG* p_pnIndex
);
```

Parameters:

p_wsPropertyName
 [in] property name
 p_wsDefaultValue
 [in] property value
 p_bEnabled
 [in] flag, property is enabled
 p_pnIndex
 [out] custom property index

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - empty property name

Remarks:

This method adds a new custom property at the end of the list.

1.4.11.4.7 AddNovaPrinter

The **AddNovaPrinter** method adds a temporary novaPDF printer in the system

```
HRESULT AddNovaPrinter(
    [in] LPCWSTR p_wsPrinterName,
    [in, string] LPCWSTR p_wsOEMID,
    [in, string] LPCWSTR p_wsServicePort,
    [in, string] LPCWSTR p_wsLicensekey
);
```

Parameters:

```

p_wsPrinterName
    [in] pointer to a null terminated Unicode string containing the name of the printer
p_wsOEMID
    [in] custom OEMID; for trial is "nPdfSdk10_Softland"
p_wsServicePort
    [in] novaPDF Server service port number,
p_wsLicenseKey
    [in] license key

```

Return values:

S_OK on success or COM error code
 NV_NOT_A_NOVAPDF_PRINTER - invalid OEMID
 NV_INVALID_PRINTER_NAME - a printer with the specified name cannot be added

Remarks:

This method must be called before printing documents and setting novaPDF options. It will add a printer in the system with the specified name. This printer will be available until DeleteNovaPrinter is called with the same printer name. Use this method if you wish to work with temporary printers.

1.4.11.4.8 AddNovaPrinter2

The **AddNovaPrinter2** method adds a temporary novaPDF printer in the system

```

HRESULT AddNovaPrinter2(
    [in] BSTR p_wsPrinterName,
    [in, string] BSTR p_wsOEMID,
    [in, string] BSTR p_wsServicePort,
    [in, string] BSTR p_wsLicenseKey
);

```

Parameters:

```

p_wsPrinterName
    [in] pointer to a null terminated Unicode string containing the name of the printer
p_wsOEMID
    [in] custom OEMID; for trial is "nPdfSdk10_Softland"
p_wsServicePort
    [in] novaPDF Server service port number
p_wsLicenseKey
    [in] license key

```

Return values:

S_OK on success or COM error code
 NV_NOT_A_NOVAPDF_PRINTER - invalid OEMID
 NV_INVALID_PRINTER_NAME - a printer with the specified name cannot be added

Remarks:

This method must be called before printing documents and setting novaPDF options. It will add a printer in the system with the specified name. This printer will be available until DeleteNovaPrinter is called with the same printer name. Use this method if you wish to work with temporary printers.

1.4.11.4.9 AddNovaPrinterExt

The **AddNovaPrinterExt** method adds a temporary novaPDF printer in the system

```
HRESULT AddNovaPrinterExt(
    [in, string] LPCWSTR p_wsPrinterName,
    [in, string] LPCWSTR p_wsPortName,
    [in, string] LPCWSTR p_wsOEMID,
    [in, string] LPCWSTR p_wsServicePort,
    [in, string] LPCWSTR p_wsLicensekey,
    [in] SHORT p_nDefaultPaperSize,
    [in, string] LPCWSTR p_wsDefaultPaperName,
    [in] SHORT p_nDefaultPaperLength,
    [in] SHORT p_nDefaultPaperWidth,
    [in] SHORT p_nDefaultResolution,
    [in] SHORT p_nMaxCopies,
    [in] SHORT p_nDefaultCopies,
    [in] SHORT p_nDefaultCollate,
    [in] SHORT p_nDefaultOrientation,
    [in] SHORT p_nDefaultScale,
    [in] BOOL p_bAllowChangePaper,
    [in] BOOL p_bAllowChangeResolution,
    [in] BOOL p_bAllowChangeCopies,
    [in] BOOL p_bAllowChangeCollate,
    [in] BOOL p_bAllowChangeOrientation,
    [in] BOOL p_bAllowChangeScale,
    [in] BOOL p_bSharedPrinter,
    [in, string] LPCWSTR p_wsSharedName
);
```

Parameters:

p_wsPrinterName
[in] pointer to a null terminated Unicode string containing the name of the printer

p_wsPortName
[in] pointer to a null terminated Unicode string containing the name of the printer port

p_wsOEMID
[in] pointer to a null terminated Unicode string containing custom OEMID; for the printer

p_wsServicePort
[in] pointer to a null terminated Unicode string containing novaPDF Server service port

p_wslicenseKey
[in] pointer to a null terminated Unicode string containing license key

p_nDefaultPaperSize
[in] default paper size (for instance 1 for Letter, 9 for A4,...)

p_wsDefaultPaperName
[in] pointer to a null terminated Unicode string containing paper name (like Letter)

p_nDefaultPaperLength
[in] default paper length expressed in tenths of millimeters (for A4, 2970)

p_nDefaultPaperWidth
[in] default paper width expressed in tenths of millimeters (for A4, 2100)

p_nDefaultResolution
[in] default resolution (300, 600, ...)

```

p_nMaxCopies
    [in] maximum number of copies allowed (999)
p_nDefaultCopies
    [in] default number of copies (1)
p_nDefaultCollate
    [in] default collate (1 or 0)
p_nDefaultOrientation
    [in] default orientation (1 - portrait, 2 - landscape)
p_nDefaultScale
    [in] default scale (100)
p_bAllowChangePaper
    [in] bool, allow user to change paper size
p_bAllowChangeResolution
    [in] bool, allow user to change resolution
p_bAllowChangeCopies
    [in] bool, allow user to change copies
p_bAllowChangeCollate
    [in] bool, allow user to change collate
p_bAllowChangeOrientation
    [in] bool, allow user to change orientation
p_bAllowChangeScale
    [in] bool, allow user to change scale
p_bSharedPrinter
    [in] share the printer when added
p_wsSharedName
    [in] pointer to a null terminated Unicode string containing shared printer name

```

Return values:

```

S_OK on success or COM error code
NV_NOT_A_NOVAPDF_PRINTER - invalid OEMID
NV_INVALID_LICENSE - invalid license
NV_INVALID_PRINTER_NAME - a printer with the specified name or options cannot be added

```

Remarks:

This method must be called before printing documents and setting novaPDF options. It will add a printer in the system with the specified name and options. This printer will be available until DeleteNovaPrinter is called with the same printer name. Use this method if you wish to work with temporary printers and you wish to configure special printer defaults.

1.4.11.4.10 AddNovaPrinterExt2

The **AddNovaPrinterExt2** method adds a temporary novaPDF printer in the system

```

HRESULT AddNovaPrinterExt2(
    [in, string] BSTR p_wsPrinterName,
    [in, string] BSTR p_wsPortName,
    [in, string] BSTR p_wsOEMID,
    [in, string] BSTR p_wsServicePort,
    [in, string] BSTR p_wsLicensekey,
    [in] SHORT p_nDefaultPaperSize,
    [in, string] BSTR p_wsDefaultPaperName,

```

```

[in] SHORT p_nDefaultPaperLength,
[in] SHORT p_nDefaultPaperWidth,
[in] SHORT p_nDefaultResolution,
[in] SHORT p_nMaxCopies,
[in] SHORT p_nDefaultCopies,
[in] SHORT p_nDefaultCollate,
[in] SHORT p_nDefaultOrientation,
[in] SHORT p_nDefaultScale,
[in] BOOL p_bAllowChangePaper,
[in] BOOL p_bAllowChangeResolution,
[in] BOOL p_bAllowChangeCopies,
[in] BOOL p_bAllowChangeCollate,
[in] BOOL p_bAllowChangeOrientation,
[in] BOOL p_bAllowChangeScale,
[in] BOOL p_bSharedPrinter,
[in, string] BSTR p_wsSharedName
);

```

Parameters:

```

p_wsPrinterName
    [in] printer name
p_wsPortName
    [in] printer port
p_wsOEMID
    [in] custom OEMID; for trial is "nPdfSdk10_Softland"
p_wsServicePort
    [in] novaPDF Server service port number, by default 8501
p_wslicenseKey
    [in] license key
p_nDefaultPaperSize
    [in] default paper size (for instance 1 for Letter, 9 for A4,...)
p_wsDefaultPaperName
    [in] pointer to a null terminated Unicode string containing paper name (like Letter)
p_nDefaultPaperLength
    [in] default paper length expressed in tenths of millimeters (for A4, 2970)
p_nDefaultPaperWidth
    [in] default paper width expressed in tenths of millimeters (for A4, 2100)
p_nDefaultResolution
    [in] default resolution (300, 600, ...)
p_nMaxCopies
    [in] maximum number of copies allowed (999)
p_nDefaultCopies
    [in] default number of copies (1)
p_nDefaultCollate
    [in] default collate (1 or 0)
p_nDefaultOrientation
    [in] default orientation (1 - portrait, 2 - landscape)
p_nDefaultScale
    [in] default scale (100)
p_bAllowChangePaper
    [in] bool, allow user to change paper size

```

```

p_bAllowChangeResolution
    [in] bool, allow user to change resolution
p_bAllowChangeCopies
    [in] bool, allow user to change copies
p_bAllowChangeCollate
    [in] bool, allow user to change collate
p_bAllowChangeOrientation
    [in] bool, allow user to change orientation
p_bAllowChangeScale
    [in] bool, allow user to change scale
p_bSharedPrinter
    [in] share the printer when added
p_wsSharedName
    [in] shared printer name

```

Return values:

S_OK on success or COM error code
 NV_NOT_A_NOVAPDF_PRINTER - invalid OEMID
 NV_INVALID_LICENSE - invalid license
 NV_INVALID_PRINTER_NAME - a printer with the specified name or options cannot be added

Remarks:

This method must be called before printing documents. It will add a printer in the system with the specified name and options. This printer will be available until DeleteNovaPrinter2 is called with the same printer name. Use this method if you wish to work with temporary printers and you wish to configure special printer defaults.

1.4.11.4.11 AddOverlay

The **AddOverlay** method adds an overlay

```

HRESULT AddOverlay(
    [out, string] LPWSTR* p_pwsNewOverlayId,
    [out, string] LPWSTR* p_pwsNewLayoutId,
);

```

Parameters:

```

p_pwsNewOverlayId
    [out] new overlay id
p_pwsNewLayoutId
    [out] new layout id

```

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

This method adds a new action at the end of the list of actions. After adding an action, you can change action position in the list and set specific options for each action type.

1.4.11.4.12 AddOverlay2

The **AddOverlay2** method adds an overlay

```
HRESULT AddOverlay2(  
    [out, string] BSTR* p_pwsNewOverlayId,  
    [out, string] BSTR* p_pwsNewLayoutId,  
);
```

Parameters:

p_pwsNewOverlayId
[out] new overlay id
p_pwsNewLayoutId
[out] new layout id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

This method adds a new action at the end of the list of actions. After adding an action. you can change action position in the list and set specific options for each action type.

1.4.11.4.13 AddProfile

The **AddProfile** method adds a new profile

```
HRESULT AddProfile(  
    [in, string] LPCWSTR p_wsProfileName,  
    [in] BOOL p_bPublicProfile  
    [out, string] LPWSTR* p_pwsNewProfileId  
);
```

Parameters:

p_wsProfileName
[in] name of the profile to add
p_bPublicProfile
[in] Flag if the profile is a public or a private profile
p_pwsNewProfileId
[out] return profile id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_SERVICE_ERROR - cannot connect to novaPDF Server service
NV_PROFILE_ERROR - cannot read default profile

NV_PROFILE_SAVE_ERROR - cannot save new profile

Remarks:

The newly created profile contains default settings.

1.4.11.4.14 AddProfile2

The **AddProfile2** method adds a new profile

```
HRESULT AddProfile2(
    [in, string] BSTR p_wsProfileName,
    [in] BOOL      p_bPublicProfile
    [out, string] BSTR* p_pwsNewProfileId
);
```

Parameters:

p_wsProfileName
[in] name of the profile to add

p_bPublicProfile
[in] Flag if the profile is a public or a private profile

p_pwsNewProfileId
[out] return profile id

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_SERVICE_ERROR - cannot connect to novaPDF Server service

NV_PROFILE_ERROR - cannot read default profile

NV_PROFILE_SAVE_ERROR - cannot save new profile

Remarks:

The newly created profile contains default settings.

1.4.11.4.15 AddSaveRule

The **AddSaveRule** method adds save rule

```
HRESULT AddSaveRule(
    [in] LONG p_nType,
    [in, string] LPCWSTR p_wsName,
    [in, string] LPCWSTR p_wsDescription,
    [in, string] LPCWSTR p_wsText,
    [in, string] LPCWSTR p_wsFormat,
    [in] BOOL p_bEnabled,
    [out] LONG* p_pnIndex
);
```

Parameters:

p_nType
[in] save rule type (0-remove from start, 1- remove from end, 2 - remove all, 3


```

p_wsName
    [in] rule name
p_wsDescription
    [in] rule description
p_wsText
    [in] text to remove or regular expression
p_wsFormat
    [in] format for regular expression
p_bEnabled
    [in] flag, rule is enabled
p_pnIndex
    [out] rule index

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

```

Remarks:

This method adds a new save rule at the end of the list.

1.4.11.4.16 AddSaveRule2

The **AddSaveRule2** method adds save rule

```

HRESULT AddSaveRule2(
    [in] LONG p_nType,
    [in, string] BSTR p_wsName,
    [in, string] BSTR p_wsDescription,
    [in, string] BSTR p_wsText,
    [in, string] BSTR p_wsFormat,
    [in] BOOL p_bEnabled,
    [out] LONG* p_pnIndex
);

```

Parameters:

```

p_nType
    [in] save rule type (0-remove from start, 1- remove from end, 2 - remove all, 3
p_wsName
    [in] rule name
p_wsDescription
    [in] rule description
p_wsText
    [in] text to remove or regular expression
p_wsFormat
    [in] format for regular expression
p_bEnabled
    [in] flag, rule is enabled
p_pnIndex
    [out] rule index

```

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

This method adds a new save rul at the end of the list.

1.4.11.4.17 AddUserTag

The **AddUserTag** method adds an user tag

```
HRESULT AddUserTag(  
    [in, string] LPCWSTR p_wsTag,  
    [in, string] LPCWSTR p_wsDefaultValue,  
    [in] BOOL p_bEnabled,  
    [out] LONG* p_pnIndex  
);
```

Parameters:

p_wsTag
 [in] user tag
p_wsDefaultValue
 [in] default tag value
p_bEnabled
 [in] flag, tag is enabled
p_pnIndex
 [out] tag index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

This method adds a new user tag at the end of the list.

1.4.11.4.18 AddUserTag2

The **AddUserTag2** method adds an user tag

```
HRESULT AddUserTag2(  
    [in, string] BSTR p_wsTag,  
    [in, string] BSTR p_wsDefaultValue,  
    [in] BOOL p_bEnabled,  
    [out] LONG* p_pnIndex  
);
```

Parameters:

```
p_wsTag
    [in] user tag
p_wsDefaultValue
    [in] default tag value
p_bEnabled
    [in] flag, tag is enabled
p_pnIndex
    [out] tag index
```

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

This method adds a new user tag at the end of the list.

1.4.11.4.19 AddWatermarkImage

The **AddWatermarkImage** method adds a new image watermark.

```
HRESULT AddWatermarkImage(
    [out, string] LPWSTR* p_pwsNewWatermarkId,
    [out, string] LPWSTR* p_pwsNewLayoutId
);
```

Parameters:

p_pwsNewWatermarkId,
 [out, string] - return new watermark id
p_pwsNewLayoutId
 [in, string] - return layout id for the new watermark

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

The newly created watermark contains default settings. Use the watermark id and layout id as parameters for set watermark and layout options functions.

For layout options, see Working with Layout objects.

1.4.11.4.20 AddWatermarkImage2

The **AddWatermarkImage2** method adds a new image watermark.

```
HRESULT AddWatermarkImage2(
```

```
    [out, string] BSTR* p_pwsNewWatermarkId,  
    [out, string] BSTR* p_pwsNewLayoutId  
);
```

Parameters:

```
p_pwsNewWatermarkId,  
    [out, string] - return new watermark id  
p_pwsNewLayoutId  
    [in, string] - return layout id for the new watermark
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded
```

Remarks:

The newly created watermark contains default settings. Use the watermark id and layout id as parameters for set watermark and layout options functions.

For layout options, see Working with Layout objects.

1.4.11.4.21 AddWatermarkText

The **AddWatermarkText** method adds a new text watermark.

```
HRESULT AddWatermarkText(  
    [out, string] LPWSTR* p_pwsNewWatermarkId,  
    [out, string] LPWSTR* p_pwsNewLayoutId  
);
```

Parameters:

```
p_pwsNewWatermarkId,  
    [out, string] - return new watermark id  
p_pwsNewLayoutId  
    [in, string] - return layout id for the new watermark
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded
```

Remarks:

The newly created watermark contains default settings. Use the watermark id and layout id as parameters for set watermark and layout options functions.

For layout options, see Working with Layout objects.

1.4.11.4.22 AddWatermarkText2

The **AddWatermarkText2** method adds a new text watermark.

```
HRESULT AddWatermarkText2(  
    [out, string] BSTR* p_pwsNewWatermarkId,  
    [out, string] BSTR* p_pwsNewLayoutId  
);
```

Parameters:

p_pwsNewWatermarkId,
 [out, string] - return new watermark id
p_pwsNewLayoutId
 [in, string] - return layout id for the new watermark

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

Remarks:

The newly created watermark contains default settings. Use the watermark id and layout id as parameters for set watermark and layout options functions.

For layout options, see Working with Layout objects.

1.4.11.4.23 ClearCustomProperties

The **ClearCustomProperties** method deletes all custom properties

```
HRESULT ClearCustomProperties();
```

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.24 ClearFontOptions

The **ClearFontOptions** empties the always embed and never embed fonts lists.

```
HRESULT ClearFontOptions(void);
```

Parameters:

none

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called

NV_NO_PROFILE - no profile loaded

1.4.11.4.25 ClearSaveRules

The **ClearSaveRules** method deletes all save rules

```
HRESULT ClearSaveRules();
```

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.26 ClearUserTags

The **ClearUserTags** method deletes all user tags

```
HRESULT ClearUserTags();
```

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.27 ConvertExcelDocument

The **ConvertExcelDocument** converts an Excel document to PDF. Excel sheet names can be added as bookmarks in the PDF.

```
HRESULT ConvertExcelDocument(  
    [in, string] LPCWSTR p_wsDocName,  
    [in] BOOL p_bConvertSheetNamesToPDFBookmarks,  
    [in] BOOL p_bWaitPDF  
);
```

Parameters:

p_wsDocName
 [in] Excel document name with full path
p_bConvertSheetNamesToPDFBookmarks
 [in] flag, if set to 1 Excel sheet names will be added as PDF bookmarks
p_bWaitPDF
 [in] flag, if set function returns after pdf is saved and all actions executed

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_OPENFILE_ERROR - failed to open the document
NV_FILEPROCESS_ERROR - failed to read document information

Remarks:

Hidden links from Excel document are not converted to PDF links.

1.4.11.4.28 ConvertExcelDocument2

The **ConvertExcelDocument2** converts an Excel document to PDF. Excel sheet names can be added as bookmarks in the PDF.

```
HRESULT ConvertExcelDocument2(  
    [in, string] BSTR p_wsDocName,  
    [in] BOOL p_bConvertSheetNamesToPDFBookmarks,  
    [in] BOOL p_bWaitPDF  
);
```

Parameters:

p_wsDocName
 [in] Excel document name with full path
p_bConvertSheetNamesToPDFBookmarks
 [in] flag, if set to 1 Excel sheet names will be added as PDF bookmarks
p_bWaitPDF
 [in] flag, if set function returns after pdf is saved and all actions executed

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_OPENFILE_ERROR - failed to open the document
NV_FILEPROCESS_ERROR - failed to read document information

Remarks:

Hidden links from Excel document are not converted to PDF links.

1.4.11.4.29 ConvertPowerPointDocument

The **ConvertPowerPointDocument** converts a PowerPoint document to PDF. There can be added a PDF bookmark for each PowerPoint slide and Internet and internal document links can be converted to PDF hyperlinks.

```
HRESULT ConvertPowerPointDocument(  
    [in, string] LPCWSTR p_wsDocName,  
    [in] BOOL p_bAddPDFBookmarkForEachSlide,  
    [in] BOOL p_bConvertCrossReferenceLinks,  
    [in] BOOL p_bConvertCrossDocumentLinks,  
    [in] BOOL p_bConvertInternetLinks,  
    [in] BOOL p_bUseRelativePaths,  
    [in] BOOL p_bChangeFileExtensionToPDF,  
    [in] BOOL p_bOpenFileInNewTab,  
    [in] BOOL p_bWaitPDF  
);
```

Parameters:

p_wsDocName

```

[in] PowerPoint document name with full path
p_bAddPDFBookmarkForEachSlide
[in] flag, if set to 1 PowerPoint slides names will be added as PDF bookmarks
p_bConvertCrossReferenceLinks
[in] flag, if set to 1 cross reference links (links inside the document) will be
p_bConvertCrossDocumentLinks
[in] flag, if set to 1 cross document links (links to other documents) will be
p_bConvertInternetLinks
[in] flag, if set to 1 Internet links will be converted to PDF hyperlinks
p_bUseRelativePaths
[in] flag, for cross document links, use relative paths for files
p_bChangeFileExtensionToPDF
[in] flag, for cross document links, change file extension to .pdf
p_bOpenFileInNewTab
[in] flag, for pdf documents links, open them in a new tab in Adobe Reader
p_bWaitPDF
[in] flag, if set function returns after pdf is saved and all actions executed

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_OPENFILE_ERROR - failed to open the document
NV_FILEPROCESS_ERROR - failed to read document information

```

1.4.11.4.30 ConvertPowerPointDocument2

The **ConvertPowerPointDocument2** converts a PowerPoint document to PDF. There can be added a PDF bookmark for each PowerPoint slide and Internet and internal document links can be converted to PDF hyperlinks.

```

HRESULT ConvertPowerPointDocument2(
[in, string] BSTR p_wsDocName,
[in] BOOL p_bAddPDFBookmarkForEachSlide,
[in] BOOL p_bConvertCrossReferenceLinks,
[in] BOOL p_bConvertCrossDocumentLinks,
[in] BOOL p_bConvertInternetLinks,
[in] BOOL p_bUseRelativePaths,
[in] BOOL p_bChangeFileExtensionToPDF,
[in] BOOL p_bOpenFileInNewTab,
[in] BOOL p_bWaitPDF
);

```

Parameters:

```

p_wsDocName
[in] PowerPoint document name with full path
p_bAddPDFBookmarkForEachSlide
[in] flag, if set to 1 PowerPoint slides names will be added as PDF bookmarks
p_bConvertCrossReferenceLinks
[in] flag, if set to 1 cross reference links (links inside the document) will be
p_bConvertCrossDocumentLinks

```


[in] flag, if set to 1 cross document links (links to other documents) will be converted to PDF hyperlinks

p_bConvertInternetLinks

[in] flag, if set to 1 Internet links will be converted to PDF hyperlinks

p_bUseRelativePaths

[in] flag, for cross document links, use relative paths for files

p_bChangeFileExtensionToPDF

[in] flag, for cross document links, change file extension to .pdf

p_bOpenFileInNewTab

[in] flag, for pdf documents links, open them in a new tab in Adobe Reader

p_bWaitPDF

[in] flag, if set function returns after pdf is saved and all actions executed

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_OPENFILE_ERROR - failed to open the document

NV_FILEPROCESS_ERROR - failed to read document information

1.4.11.4.31 ConvertPublisherDocument

The **ConvertPublisherDocument** converts a Publisher document to PDF. Internet and internal document links can be converted to PDF hyperlinks.

```
HRESULT ConvertPublisherDocument(
    [in, string] LPCWSTR p_wsDocName,
    [in] BOOL p_bConvertCrossReferenceLinks,
    [in] BOOL p_bConvertCrossDocumentLinks,
    [in] BOOL p_bConvertInternetLinks,
    [in] BOOL p_bConvertLinksInHeaderFooter,
    [in] BOOL p_bUseRelativePaths,
    [in] BOOL p_bChangeFileExtensionToPDF,
    [in] BOOL p_bOpenFileInNewTab,
    [in] BOOL p_bWaitPDF
);
```

Parameters:

p_wsDocName

[in] Publisher document name with full path

p_bConvertCrossReferenceLinks

[in] flag, if set to 1 cross reference links (links inside the document) will be converted to PDF hyperlinks

p_bConvertCrossDocumentLinks

[in] flag, if set to 1 cross document links (links to other documents) will be converted to PDF hyperlinks

p_bConvertInternetLinks

[in] flag, if set to 1 Internet links will be converted to PDF hyperlinks

p_bConvertLinksInHeaderFooter

[in] flag, if set to 1 links from header and footer will be converted to PDF hyperlinks

p_bUseRelativePaths

[in] flag, for cross document links, use relative paths for files

p_bChangeFileExtensionToPDF

[in] flag, for cross document links, change file extension to .pdf

```

p_bOpenFileInNewTab
    [in] flag, for pdf documents links, open them in a new tab in Adobe Reader
p_bWaitPDF
    [in] flag, if set function returns after pdf is saved and all actions executed

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_OPENFILE_ERROR - failed to open the document
NV_FILEPROCESS_ERROR - failed to read document information

```

1.4.11.4.32 ConvertPublisherDocument2

The **ConvertPublisherDocument2** converts a Publisher document to PDF. Internet and internal document links can be converted to PDF hyperlinks.

```

HRESULT ConvertPublisherDocument2(
    [in, string] BSTR p_wsDocName,
    [in] BOOL p_bConvertCrossReferenceLinks,
    [in] BOOL p_bConvertCrossDocumentLinks,
    [in] BOOL p_bConvertInternetLinks,
    [in] BOOL p_bConvertLinksInHeaderFooter,
    [in] BOOL p_bUseRelativePaths,
    [in] BOOL p_bChangeFileExtensionToPDF,
    [in] BOOL p_bOpenFileInNewTab,
    [in] BOOL p_bWaitPDF
);

```

Parameters:

```

p_wsDocName
    [in] Publisher document name with full path
p_bConvertCrossReferenceLinks
    [in] flag, if set to 1 cross reference links (links inside the document) will be converted
p_bConvertCrossDocumentLinks
    [in] flag, if set to 1 cross document links (links to other documents) will be converted
p_bConvertInternetLinks
    [in] flag, if set to 1 Internet links will be converted to PDF hyperlinks
p_bConvertLinksInHeaderFooter
    [in] flag, if set to 1 links from header and footer will be converted to PDF hyperlinks
p_bUseRelativePaths
    [in] flag, for cross document links, use relative paths for files
p_bChangeFileExtensionToPDF
    [in] flag, for cross document links, change file extension to .pdf
p_bOpenFileInNewTab
    [in] flag, for pdf documents links, open them in a new tab in Adobe Reader
p_bWaitPDF
    [in] flag, if set function returns after pdf is saved and all actions executed

```

Return values:

```

S_OK on success or COM error code

```

NV_NOT_INITIALIZED - Initialize was not called
 NV_OPENFILE_ERROR - failed to open the document
 NV_FILEPROCESS_ERROR - failed to read document information

1.4.11.4.33 ConvertVisioDocument

The **ConvertVisioDocument** converts a Visio document to PDF. Internet and internal document links can be converted to PDF hyperlinks.

```
HRESULT ConvertVisioDocument(
    [in, string] LPCWSTR p_wsDocName,
    [in] BOOL p_bConvertCrossReferenceLinks,
    [in] BOOL p_bConvertCrossDocumentLinks,
    [in] BOOL p_bConvertInternetLinks,
    [in] BOOL p_bUseRelativePaths,
    [in] BOOL p_bChangeFileExtensionToPDF,
    [in] BOOL p_bOpenFileInNewTab,
    [in] BOOL p_bWaitPDF
);
```

Parameters:

p_wsDocName
 [in] Visio document name with full path

p_bConvertCrossReferenceLinks
 [in] flag, if set to 1 cross reference links (links inside the document) will be converted to PDF hyperlinks

p_bConvertCrossDocumentLinks
 [in] flag, if set to 1 cross document links (links to other documents) will be converted to PDF hyperlinks

p_bConvertInternetLinks
 [in] flag, if set to 1 Internet links will be converted to PDF hyperlinks

p_bUseRelativePaths
 [in] flag, for cross document links, use relative paths for files

p_bChangeFileExtensionToPDF
 [in] flag, for cross document links, change file extension to .pdf

p_bOpenFileInNewTab
 [in] flag, for pdf documents links, open them in a new tab in Adobe Reader

p_bWaitPDF
 [in] flag, if set function returns after pdf is saved and all actions executed

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_OPENFILE_ERROR - failed to open the document
 NV_FILEPROCESS_ERROR - failed to read document information

1.4.11.4.34 ConvertVisioDocument2

The **ConvertVisioDocument2** converts a Visio document to PDF. Internet and internal document links can be converted to PDF hyperlinks.

```
HRESULT ConvertVisioDocument2(
    [in, string] BSTR p_wsDocName,
    [in] BOOL p_bConvertCrossReferenceLinks,
    [in] BOOL p_bConvertCrossDocumentLinks,
    [in] BOOL p_bConvertInternetLinks,
    [in] BOOL p_bUseRelativePaths,
    [in] BOOL p_bChangeFileExtensionToPDF,
    [in] BOOL p_bOpenFileInNewTab,
    [in] BOOL p_bWaitPDF
);
```

Parameters:

p_wsDocName
[in] Visio document name with full path

p_bConvertCrossReferenceLinks
[in] flag, if set to 1 cross reference links (links inside the document) will be converted to PDF hyperlinks

p_bConvertCrossDocumentLinks
[in] flag, if set to 1 cross document links (links to other documents) will be converted to PDF hyperlinks

p_bConvertInternetLinks
[in] flag, if set to 1 Internet links will be converted to PDF hyperlinks

p_bUseRelativePaths
[in] flag, for cross document links, use relative paths for files

p_bChangeFileExtensionToPDF
[in] flag, for cross document links, change file extension to .pdf

p_bOpenFileInNewTab
[in] flag, for pdf documents links, open them in a new tab in Adobe Reader

p_bWaitPDF
[in] flag, if set function returns after pdf is saved and all actions executed

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_OPENFILE_ERROR - failed to open the document
 NV_FILEPROCESS_ERROR - failed to read document information

1.4.11.4.35 ConvertWordDocument

The **ConvertWordDocument** converts a Word document to PDF. Internet and internal document links can be converted to PDF hyperlinks. Word Headings and Word bookmarks can be converted to PDF bookmarks.

```
HRESULT ConvertWordDocument(
    [in, string] LPCWSTR p_wsDocName,
    [in] BOOL p_bConvertHeadings,
    [in] BOOL p_bConvertBookmarks,
```

```

[in] BOOL p_bConvertCrossReferenceLinks,
[in] BOOL p_bConvertCrossDocumentLinks,
[in] BOOL p_bConvertInternetLinks,
[in] BOOL p_bConvertLinksInHeaderFooter,
[in] BOOL p_bUseRelativePaths,
[in] BOOL p_bChangeFileExtensionToPDF,
[in] BOOL p_bOpenFileInNewTab,
[in] BOOL p_bConvertFootEndNotesLinks,
[in] UINT p_nStyleCount,
[in, string] LPCWSTR p_pwsStyleView,
[in] BOOL p_bWaitPDF
);

```

Parameters:

`p_wsDocName`
[in] Word document name with full path

`p_bConvertHeadings`
[in] flag, if set to 1 Word Headings will be added as PDF bookmarks

`p_bConvertBookmarks`
[in] flag, if set to 1 Word bookmarks will be added as PDF bookmarks

`p_bConvertCrossReferenceLinks`
[in] flag, if set to 1 cross reference links (links inside the document) will be converted to PDF hyperlinks

`p_bConvertCrossDocumentLinks`
[in] flag, if set to 1 cross document links (links to other documents) will be converted to PDF hyperlinks

`p_bConvertInternetLinks`
[in] flag, if set to 1 Internet links will be converted to PDF hyperlinks

`p_bConvertLinksInHeaderFooter`
[in] flag, if set to 1 links from header and footer will be converted to PDF hyperlinks

`p_bUseRelativePaths`
[in] flag, for cross document links, use relative paths for files

`p_bChangeFileExtensionToPDF`
[in] flag, for cross document links, change file extension to .pdf

`p_bOpenFileInNewTab`
[in] flag, for pdf documents links, open them in a new tab in Adobe Reader

`p_bConvertFootEndNotesLinks`
[in] flag, if set to 1 footnote and endnote links will be converted to PDF hyperlinks

`p_nStyleCount`
[in] count of styles in `p_pwsStyleView` parameter

`p_pwsStyleView`
[in] string with a list of Word headings to be converted as bookmarks; Headings heading level and heading type (for now use 0 as Standard type). Sample: "Heading 1"

`p_bWaitPDF`
[in] flag, if set function returns after pdf is saved and all actions executed

Return values:

`S_OK` on success or COM error code
`NV_NOT_INITIALIZED` - Initialize was not called
`NV_OPENFILE_ERROR` - failed to open the document
`NV_FILEPROCESS_ERROR` - failed to read document information

1.4.11.4.36 ConvertWordDocument2

The **ConvertWordDocument2** converts a Word document to PDF. Internet and internal document links can be converted to PDF hyperlinks. Word Headings and Word bookmarks can be converted to PDF bookmarks.

```
HRESULT ConvertWordDocument2(
    [in, string] BSTR p_wsDocName,
    [in] BOOL p_bConvertHeadings,
    [in] BOOL p_bConvertBookmarks,
    [in] BOOL p_bConvertCrossReferenceLinks,
    [in] BOOL p_bConvertCrossDocumentLinks,
    [in] BOOL p_bConvertInternetLinks,
    [in] BOOL p_bConvertLinksInHeaderFooter,
    [in] BOOL p_bUseRelativePaths,
    [in] BOOL p_bChangeFileExtensionToPDF,
    [in] BOOL p_bOpenFileInNewTab,
    [in] BOOL p_bConvertFootEndNotesLinks,
    [in] UINT p_nStyleCount,
    [in, string] BSTR p_pwsStyleView,
    [in] BOOL p_bWaitPDF
);
```

Parameters:

p_wsDocName
[in] Word document name with full path

p_bConvertHeadings
[in] flag, if set to 1 Word Headings will be added as PDF bookmarks

p_bConvertBookmarks
[in] flag, if set to 1 Word bookmarks will be added as PDF bookmarks

p_bConvertCrossReferenceLinks
[in] flag, if set to 1 cross reference links (links inside the document) will be converted to PDF hyperlinks

p_bConvertCrossDocumentLinks
[in] flag, if set to 1 cross document links (links to other documents) will be converted to PDF hyperlinks

p_bConvertInternetLinks
[in] flag, if set to 1 Internet links will be converted to PDF hyperlinks

p_bConvertLinksInHeaderFooter
[in] flag, if set to 1 links from header and footer will be converted to PDF hyperlinks

p_bUseRelativePaths
[in] flag, for cross document links, use relative paths for files

p_bChangeFileExtensionToPDF
[in] flag, for cross document links, change file extension to .pdf

p_bOpenFileInNewTab
[in] flag, for pdf documents links, open them in a new tab in Adobe Reader

p_bConvertFootEndNotesLinks
[in] flag, if set to 1 footnote and endnote links will be converted to PDF hyperlinks

p_nStyleCount
[in] count of styles in p_pwsStyleView parameter

p_pwsStyleView
[in] string with a list of Word headings to be converted as bookmarks; Headings are separated by semicolon, heading level and heading type (for now use 0 as Standard type). Sample: "Heading 1; 0; Standard; Heading 2; 0; Standard; ..."

p_bWaitPDF
[in] flag, if set function returns after pdf is saved and all actions executed

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_OPENFILE_ERROR - failed to open the document
 NV_FILEPROCESS_ERROR - failed to read document information

1.4.11.4.37 CopyProfile

The **CopyProfile** method copies an existing profile to a new profile.

```
HRESULT CopyProfile(
    [in, string] LPCWSTR p_wsNewProfileName,
    [in]         BOOL     p_bPublicProfile,
    [in, string] LPCWSTR p_wsOldProfileId,
    [out]        LPWSTR*  p_pwsNewProfileId
);
```

Parameters:

p_wsNewProfileName
 [in] name of the new profile
 p_bPublicProfile
 [in] Flag if the profile is a public or a private profile
 p_wsOldProfileId
 [in] id for the profile to be copied
 p_pwsNewProfileId
 [out] the new profile id

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_SERVICE_ERROR - cannot connect to novaPDF Server service
 NV_PROFILE_ERROR - cannot read default profile
 NV_PROFILE_SAVE_ERROR - cannot save new profile

1.4.11.4.38 CopyProfile2

The **CopyProfile2** method copies an existing profile to a new profile.

```
HRESULT CopyProfile2(
    [in, string] BSTR p_wsNewProfileName,
    [in]         BOOL p_bPublicProfile,
    [in, string] BSTR p_wsOldProfileId,
    [out]        LPWSTR* p_pwsNewProfileId
);
```

Parameters:

p_wsNewProfileName
 [in] name of the new profile

p_bPublicProfile
 [in] Flag if the profile is a public or a private profile
p_wsOldProfileId
 [in] id for the profile to be copied
p_pwsNewProfileId
 [out] the new profile id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_SERVICE_ERROR - cannot connect to novaPDF Server service
NV_PROFILE_ERROR - cannot read default profile
NV_PROFILE_SAVE_ERROR - cannot save new profile

1.4.11.4.39 DeleteAction

The **DeleteAction** method deletes an existing action

```
HRESULT DeleteAction(  
    [in, string] LPCWSTR p_wsActionId  
);
```

Parameters:

p_wsActionId
 [in] action id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.40 DeleteAction2

The **DeleteAction2** method deletes an existing action

```
HRESULT DeleteAction(  
    [in, string] BSTR p_wsActionId  
);
```

Parameters:

p_wsActionId
 [in] action id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.41 DeleteBookmarkDefinition

The **DeleteBookmarkDefinition** method deletes an existing bookmark definition.

```
HRESULT DeleteBookmarkDefinition(  
    [in] SHORT p_nDefinition  
);
```

Parameters:

p_nDefinition
[in] definition index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_BOOKMARK_DEF - wrong bookmark definition index
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.42 DeleteCustomProperty

The **DeleteCustomProperty** method deletes the custom property for the given index

```
HRESULT DeleteCustomProperty(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] property index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_CUSTOM_PROPERTY - invalid custom property index

Remarks:

This method deletes the custom property at position given by p_nIndex

1.4.11.4.43 DeleteLayout

The **DeleteLayout** method deletes an existing layout for the specified object

```
HRESULT DeleteLayout(  
    [in] LPCWSTR p_wsObjectId
```

```
    [in] LPCWSTR p_wsLayoutId
);
```

Parameters:

```
p_pwsObjectId
    [in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
    [in] layout id (obtained with GetLayout )
```

Return values:

```
S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_LAYOUT - layout not found for specified object
```

1.4.11.4.44 DeleteLayout2

The **DeleteLayout2** method deletes an existing layout for the specified object

```
HRESULT DeleteLayout2(
    [in] BSTR p_wsObjectId
    [in] BSTR p_wsLayoutId
);
```

Parameters:

```
p_pwsObjectId
    [in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
    [in] layout id (obtained with GetLayout2 )
```

Return values:

```
S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_LAYOUT - layout not found for specified object
```

1.4.11.4.45 DeleteNovaPrinter

The **DeleteNovaPrinter** method adds a temporary novaPDF printer in the system

```
HRESULT DeleteNovaPrinter(
    [in] LPCWSTR p_wsPrinterName
);
```

Parameters:

```
p_wsPrinterName
    [in] pointer to a null terminated Unicode string containing the name of the printer
```

Return values:

```
S_OK on success or COM error code
NV_INVALID_PRINTER_NAME - not a novaPDF printer
NV_ERROR_DELETE_PRINTER - there was an error when deleting the printer
```

Remarks:

This method must be called for printers added with AddNovaPrinter method, after finish printing documents. It will delete the temporary printer from the system. Use this method if you wish to work with temporary printers.

1.4.11.4.46 DeleteNovaPrinter2

The **DeleteNovaPrinter2** method adds a temporary novaPDF printer in the system

```
HRESULT DeleteNovaPrinter2(  
    [in] BSTR p_wsPrinterName  
);
```

Parameters:

p_wsPrinterName
[in] name of the printer to be deleted.

Return values:

S_OK on success or COM error code
NV_INVALID_PRINTER_NAME - not a novaPDF printer
NV_ERROR_DELETE_PRINTER - there was an error when deleting the printer

Remarks:

This method must be called for printers added with AddNovaPrinter method, after finish printing documents. It will delete the temporary printer from the system. Use this method if you wish to work with temporary printers.

1.4.11.4.47 DeleteOverlay

The **DeleteOverlay** method deletes an existing overlay.

```
HRESULT DeleteOverlay(  
    [in, string] LPCWSTR p_wsOverlayId  
);
```

Parameters:

p_wsOverlayId
[in] pointer to a null terminated Unicode string containing the overlay id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay index

1.4.11.4.48 DeleteOverlay2

The **DeleteOverlay2** method deletes an existing overlay.

```
HRESULT DeleteOverlay2(  
    [in, string] BSTR p_wsOverlayId
```

```
);
```

Parameters:

```
p_wsOverlayId  
[in] overlay id
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded  
NV_INVALID_OVERLAY - wrong overlay index
```

1.4.11.4.49 DeleteOverrideOptions

The **DeleteOverrideOptions** method removes all override options

```
HRESULT DeleteOverrideOptions();
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_INVALID_OPTION - error deleting options
```

1.4.11.4.50 DeletePrinterActivePublicProfile

The **DeletePrinterActivePublicProfile** method removes the active public profile setting for a printer

```
HRESULT tDeletePrinterActivePublicProfile(  
[in, string] LPCWSTR p_wsPrinterName  
);
```

Parameters:

```
p_wsPrinterName  
[in, string] printer name
```

Return values:

```
S_OK on success or COM error code  
NV_SERVICE_ERROR - error connecting to novaPDF Server service
```

Remarks:

Removes the active profile setting for the printer. The users will be allowed to change the active profile.

1.4.11.4.51 DeletePrinterActivePublicProfile2

The **DeletePrinterActivePublicProfile2** method removes the active public profile setting for a printer

```
HRESULT tDeletePrinterActivePublicProfile2(
```

```
    [in, string] BSTR p_wsPrinterName  
);
```

Parameters:

p_wsPrinterName
[in, string] printer name

Return values:

S_OK on success or COM error code
NV_SERVICE_ERROR - error connecting to novaPDF Server service

Remarks:

Removes the active profile setting for the printer. The users will be allowed to change the active profile.

1.4.11.4.52 DeleteProfile

The **DeleteProfile** method deletes an existing profile.

```
HRESULT DeleteProfile(  
    [in] LPCWSTR p_wsProfileId  
);
```

Parameters:

p_wsProfileId
[in] pointer to a null terminated Unicode string containing the id of the profile

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_SERVICE_ERROR - error connecting to novaPDF Server service
NV_PROFILE_DELETE_ERROR - error deleting profile
NV_PROFILE_ERROR - error reading profiles

1.4.11.4.53 DeleteProfile2

The **DeleteProfile2** method deletes an existing profile.

```
HRESULT DeleteProfile2(  
    [in] BSTR p_wsProfileId  
);
```

Parameters:

p_wsProfileId
[in] the id of the profile to delete.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_SERVICE_ERROR - error connecting to novaPDF Server service
NV_PROFILE_DELETE_ERROR - error deleting profile
NV_PROFILE_ERROR - error reading profiles

1.4.11.4.54 DeleteSaveRule

The **DeleteSaveRule** method deletes the save rule for the given index

```
HRESULT DeleteSaveRule(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] tag index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_SAVE_RULE - invalid save rule index

Remarks:

This method deletes the save rule at position given by p_nIndex

1.4.11.4.55 DeleteUserTag

The **DeleteUserTag** method deletes the user tag for the given index

```
HRESULT DeleteUserTag(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] tag index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_USER_TAG - invalid user tag index

Remarks:

This method deletes the tag at position given by p_nIndex

1.4.11.4.56 DeleteWatermarkImage

The **DeleteWatermarkImage** method deletes an existing watermark image.

```
HRESULT DeleteWatermarkImage(  
    [in, string] LPCWSTR p_wsWatermarkId  
);
```

Parameters:

`p_wsWatermarkId`
[in] pointer to a null terminated Unicode string containing the watermark id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong image watermark index

1.4.11.4.57 DeleteWatermarkImage2

The **DeleteWatermarkImage2** method deletes an existing watermark image.

```
HRESULT DeleteWatermarkImage2(  
    [in, string] BSTR p_wsWatermarkId  
);
```

Parameters:

`p_wsWatermarkId`
[in] the watermark id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong image watermark index

1.4.11.4.58 DeleteWatermarkText

The **DeleteWatermarkText** method deletes an existing watermark text.

```
HRESULT DeleteWatermarkText(  
    [in, string] LPCWSTR p_wsWatermarkId  
);
```

Parameters:

`p_wsWatermarkId`
[in] pointer to a null terminated Unicode string containing the watermark id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong text watermark index

1.4.11.4.59 DeleteWatermarkText2

The **DeleteWatermarkText2** method deletes an existing watermark text.

```
HRESULT DeleteWatermarkText2(  
    [in, string] BSTR p_wsWatermarkId  
);
```

```
    [in, string] BSTR p_wsWatermarkId  
);
```

Parameters:

p_wsWatermarkId
[in] the watermark id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong text watermark index

1.4.11.4.60 DisableAction

The **DisableAction** method disables an existing action

```
HRESULT DisableAction(  
    [in, string] LPCWSTR p_wsActionId  
);
```

Parameters:

p_wsActionId
[in] action id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.61 DisableAction2

The **DisableAction2** method disables an existing action

```
HRESULT DisableAction2(  
    [in, string] BSTR p_wsActionId  
);
```

Parameters:

p_wsActionId
[in] action id

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.62 DisableActionType

The **DisableActionType** method disables an existing action

```
HRESULT DisableActionType(  
    [in] LONG p_nActionType  
);
```

Parameters:

p_nActionType
[in] action type

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.63 DisableCustomProperty

The **DisableCustomProperty** method disables the custom property for the given index

```
HRESULT DisableCustomProperty(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] tag index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_CUSTOM_PROPERTY - invalid custom property index

Remarks:

This method disables the custom property at position given by p_nIndex

1.4.11.4.64 DisableSaveRule

The **DisableSaveRule** method disables the save rule for the given index

```
HRESULT DisableSaveRule(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] tag index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_SAVE_RULE - invalid save rule index

Remarks:

This method disables the save rule at position given by p_nIndex

1.4.11.4.65 DisableUserTag

The **DisableUserTag** method disables the user tag for the given index

```
HRESULT DisableUserTag(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] property index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_USER_TAG - invalid user tag index

Remarks:

This method disables the tag at position given by p_nIndex

1.4.11.4.66 EnableAction

The **EnableAction** method enables an existing action

```
HRESULT EnableAction(  
    [in, string] LPCWSTR p_wsActionId  
);
```

Parameters:

p_wsActionId
[in] action id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.67 EnableAction2

The **EnableAction2** method enables an existing action

```
HRESULT EnableAction2(  
    [in, string] BSTR p_wsActionId  
);
```

Parameters:

p_wsActionId
[in] action id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.68 EnableActionType

The **EnableActionType** method enables an existing action

```
HRESULT EnableActionType(  
    [in] LONG p_nActionType  
);
```

Parameters:

p_nActionType
[in] action type

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - id not a valid guid
NV_INVALID_ACTION - invalid action id

1.4.11.4.69 EnableCustomProperty

The **EnableCustomProperty** method enables the custom property for the given index

```
HRESULT EnableCustomProperty(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] property index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_CUSTOM_PROPERTY - invalid custom property index

Remarks:

This method enables the custom property at position given by p_nIndex

1.4.11.4.70 EnableSaveRule

The **EnableSaveRule** method enables the save rule for the given index

```
HRESULT EnableSaveRule(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] tag index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_SAVE_RULE - invalid save rule index

Remarks:

This method enables the save rule at position given by p_nIndex

1.4.11.4.71 EnableUserTag

The **EnableUserTag** method enables the user tag for the given index

```
HRESULT EnableUserTag(  
    [in] LONG p_nIndex  
);
```

Parameters:

p_nIndex
[in] tag index

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_USER_TAG - invalid user tag index

Remarks:

This method enables the tag at position given by p_nIndex

1.4.11.4.72 GetAction

The **GetAction** method retrieves the action id and action type for the specified index in the action list

```
HRESULT GetAction(  
    [in] LONG p_nIndex,  
    [out, string] LPWSTR* p_pwsActionId,  
    [out] LONG* p_pnType  
);
```

Parameters:

p_nIndex
 [in] action index
p_pwsActionId
 [out] action id
p_pnType
 [out] action type

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong index

1.4.11.4.73 GetAction2

The **GetAction2** method retrieves the action id and action type for the specified index in the action list

```
HRESULT GetAction2(  
    [in] LONG p_nIndex,  
    [out, string] BSTR* p_pwsActionId,  
    [out] LONG* p_pnType  
);
```

Parameters:

p_nIndex
[in] action index
p_pwsActionId
[out] action id
p_pnType
[out] action type

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong index

1.4.11.4.74 GetActionCount

The **GetActionCount** method retrieves the number of actions in the profile

```
HRESULT GetActionCount(  
    [out] LONG* p_pnCount  
);
```

Parameters:

p_pnCount
[out] actions count

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.75 GetActionOptionBool

The **GetActionOptionBool** method retrieves an option of boolean type for an action

```
HRESULT GetActionOptionBool(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG p_nOption,  
    [out] BOOL* p_pbValue  
);
```

Parameters:

p_pwsActionId
[in] Action id
p_wsOption
[in] option constant
p_pbValue

[out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.76 GetActionOptionBool2

The **GetActionOptionBool2** method retrieves an option of boolean type for an action

```
HRESULT GetActionOptionBool2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG     p_nOption,  
    [out] BOOL*   p_pbValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pbValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.77 GetActionOptionEncryptedString

The **GetActionOptionEncryptedString** method retrieves an option of encrypted string type for an action

```
HRESULT GetActionOptionEncryptedString(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out, string] LPWSTR* p_pwsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pwsValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.78 GetActionOptionEncryptedString2

The **GetActionOptionEncryptedString2** method retrieves an option of encrypted string type for an action

```
HRESULT GetActionOptionEncryptedString2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out, string] BSTR* p_pwsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pwsValue

[out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.79 GetActionOptionFloat

The **GetActionOptionFloat** method retrieves an option of float type for an action

```
HRESULT GetActionOptionFloat(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out] FLOAT*   p_pfValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pfValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.80 GetActionOptionFloat2

The **GetActionOptionFloat2** method retrieves an option of float type for an action

```
HRESULT GetActionOptionFloat2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out] FLOAT*   p_pfValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pfValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.81 GetActionOptionLong

The **GetActionOptionLong** method retrieves an option of long type for an action

```
HRESULT GetActionOptionLong(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out] LONG*    p_pnValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pnValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.82 GetActionOptionLong2

The **GetActionOptionLong2** method retrieves an option of long type for an action

```
HRESULT GetActionOptionLong2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out] LONG*    p_pnValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pnValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.83 GetActionOptionString

The **GetActionOptionString** method retrieves an option of string type for an action

```
HRESULT GetActionOptionString(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out, string] LPWSTR* p_pwsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pwsValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.84 GetActionOptionString2

The **GetActionOptionString2** method retrieves an option of string type for an action

```
HRESULT GetActionOptionString2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [out, string] BSTR* p_pwsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_pwsValue
 [out] the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.85 GetActiveProfile

The **GetActiveProfile** retrieves the id of the active profile (i.e. the profile that is used for printing).

```
HRESULT GetActiveProfile(  
    [out] LPWSTR* p_wsProfileId  
);
```

Parameters:

p_wsProfileId
[out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_NO_ACTIVE_PROFILE - there is no active profile selected for the printer

1.4.11.4.86 GetActiveProfile2

The **GetActiveProfile2** retrieves the id of the active profile (i.e. the profile that is used for printing).

```
HRESULT GetActiveProfile2(  
    [out] BSTR* p_wsProfileId  
);
```

Parameters:

p_wsProfileId
[out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_NO_ACTIVE_PROFILE - there is no active profile selected for the

printer

1.4.11.4.87 GetBookmarkDefinition

The **GetBookmarkDefinition** method retrieves an existing bookmark definition properties.

```
HRESULT GetBookmarkDefinition(
    [in] SHORT p_nDefinition,
    [out] SHORT* p_pnHeading,
    [out] BOOL* p_pbEnabled,
    [out] BOOL* p_pbDetFont,
    [out, string] LPWSTR* p_pwsDetFont,
    [out] LONG* p_pnDetFontType,
    [out] BOOL* p_pbDetStyle,
    [out] BOOL* p_pbDetBold,
    [out] BOOL* p_pbDetItalic,
    [out] BOOL* p_pbDetSize,
    [out] INT* p_pnDetSizeVal,
    [out] FLOAT* p_pnDetSizePt,
    [out] BOOL* p_pbDetColor,
    [out] LONG* p_pnDetColor,
    [out] BOOL* p_pbDispAsBold,
    [out] BOOL* p_pbDispAsItalic,
    [out] LONG* p_pnDispColor
);
```

Parameters:

```
p_nDefinition
    [in]definition index
p_pnHeading
    [out]heading index
p_pbEnabled
    [out]definition is enabled
p_pbDetFont
    [out] detect font flag
p_pwsDetFont
    [out] font name
p_pbDetStyle
    [out] detect font style
p_pbDetBold
    [out] bold font
p_pbDetItalic
    [out]] italic font
p_pbDetSize
    [out]] detect font size
p_pnDetSizeVal
    [out] font size
p_pnDetSizePt
    [out] font size rounding
p_pbDetColor
    [out] detect font color
p_pnDetColor
    [out] font color (RGB value)
```

```

p_pbDispAsBold
    [out]] display bookmark font bold
p_pbDispAsItalic
    [out] display bookmark font italic
p_pnDispColor
    [out] display bookmark font color

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_BOOKMARK_DEF - wrong bookmark definition index

```

1.4.11.4.88 GetBookmarkDefinition2

The **GetBookmarkDefinition2** method retrieves an existing bookmark definition properties.

```

HRESULT GetBookmarkDefinition2(
    [in] SHORT p_nDefinition,
    [out] SHORT* p_pnHeading,
    [out] BOOL* p_pbEnabled,
    [out] BOOL* p_pbDetFont,
    [out, string] BSTR* p_pwsDetFont,
    [out] LONG* p_pnDetFontType,
    [out] BOOL* p_pbDetStyle,
    [out] BOOL* p_pbDetBold,
    [out] BOOL* p_pbDetItalic,
    [out] BOOL* p_pbDetSize,
    [out] INT* p_pnDetSizeVal,
    [out] FLOAT* p_pnDetSizePt,
    [out] BOOL* p_pbDetColor,
    [out] LONG* p_pnDetColor,
    [out] BOOL* p_pbDispAsBold,
    [out] BOOL* p_pbDispAsItalic,
    [out] LONG* p_pnDispColor
);

```

Parameters:

```

p_nDefinition
    [in]definition index
p_pnHeading
    [out]heading index
p_pbEnabled
    [out]definition is enabled
p_pbDetFont
    [out] detect font flag
p_pwsDetFont
    [out] font name
p_pbDetStyle
    [out] detect font style

```

```

p_pbDetBold
    [out] bold font
p_pbDetItalic
    [out]] italic font
p_pbDetSize
    [out]] detect font size
p_pnDetSizeVal
    [out] font size
p_pnDetSizePt
    [out] font size rounding
p_pbDetColor
    [out] detect font color
p_pnDetColor
    [out] font color (RGB value)
p_pbDispAsBold
    [out]] display bookmark font bold
p_pbDispAsItalic
    [out] display bookmark font italic
p_pnDispColor
    [out] display bookmark font color

```

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_BOOKMARK_DEF - wrong bookmark definition index

1.4.11.4.89 GetBookmarkDefinitionCount

The **GetBookmarkDefinitionCount** method retrieves the number of bookmark definitions in a bookmark heading.

```

HRESULT GetBookmarkDefinitionCount(
    [out] SHORT* p_pnCount
);

```

Parameters:

p_pnCount
 [out] count of bookmark headings

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.90 GetContentLayout

The **GetContentLayout** method retrieves the content object and its layout object

```
HRESULT GetContentLayout(  
    [out, string] LPWSTR* p_pwsContentId  
    [out, string] LPWSTR* p_pwsLayoutId  
);
```

Parameters:

p_pwsContentId
[out, string] - content id
p_pwsLayoutId
[out, string] - layout id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_PROFILE_ERROR - error reading profile

Remarks:

The content layout defines how the printed content will be positioned on the PDF page. There is only one content object in the profile.

For layout options, see Working with Layout objects.

1.4.11.4.91 GetContentLayout2

The **GetContentLayout2** method retrieves the content object and its layout object

```
HRESULT GetContentLayout2(  
    [out, string] BSTR* p_pwsContentId  
    [out, string] BSTR* p_pwsLayoutId  
);
```

Parameters:

p_pwsContentId
[out, string] - content id
p_pwsLayoutId
[out, string] - layout id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_PROFILE_ERROR - error reading profile

Remarks:

The content layout defines how the printed content will be positioned on the PDF page. There is only one content object in the profile.

For layout options, see Working with Layout objects.

1.4.11.4.92 GetCustomProperty

The **GetCustomProperty** method returns the custom property for the given index

```
HRESULT GetCustomProperty(  
    [in] LONG p_nIndex,  
    [out, string] LPWSTR* p_pwsPropertyName,  
    [out, string] LPWSTR* p_pwsPropertyValue,  
    [out] BOOL* p_pbEnabled  
);
```

Parameters:

p_nIndex
 [in] custom property index
p_pwsPropertyName
 [out] custom property name
p_pwsPropertyValue
 [out] custom property value
p_pbEnabled
 [out] flag, tag is enabled

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_CUSTOM_PROPERTY - invalid custom property index

Remarks:

This method returns information about the custom property at position given by p_nIndex

1.4.11.4.93 GetCustomProperty2

The **GetCustomProperty2** method returns the custom property for the given index

```
HRESULT GetCustomProperty2(  
    [in] LONG p_nIndex,  
    [out, string] BSTR* p_pwsPropertyName,  
    [out, string] BSTR* p_pwsPropertyValue,  
    [out] BOOL* p_pbEnabled  
);
```

Parameters:

p_nIndex
 [in] custom property index
p_pwsPropertyName
 [out] custom property name
p_pwsPropertyValue

[out] custom property value
p_bEnabled
[out] flag, tag is enabled

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_CUSTOM_PROPERTY - invalid custom property index

Remarks:

This method returns information about the custom property at position given by p_nIndex

1.4.11.4.94 GetCustomPropertiesCount

The **GetCustomPropertiesCount** method returns custom properties count

```
HRESULT GetCustomPropertiesCount(  
    [out] LONG* p_pnCount  
);
```

Parameters:

p_pnCount
[in] custom properties count

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.95 GetFirstProfile

The **GetFirstProfile** starts an enumeration of profiles, retrieving the id of the first profile in the enumeration.

```
HRESULT GetFirstProfile(  
    [out] LPWSTR* p_pwsProfileId  
);
```

Parameters:

p_pwsProfileId
[out] pointer to a pointer to a null terminated Unicode string containing the id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_SERVICE_ERROR - cannot connect to novaPDF Server service
NV_PROFILE_ERROR - cannot load profiles

Remarks:

GetFirstProfile is used with **GetNextProfile** to retrieve profile names.

Sample usage:

```
hr = GetFirstProfile(&pId);
while (SUCCEEDED(hr) && hr != NV_NO_MORE_PROFILES) {
    // do something with pName
    // ...
    CoTaskMemFree(pId);
    // get next profile if it exists
    hr = GetNextProfile(&pId);
}
```

1.4.11.4.96 GetFirstProfile2

The **GetFirstProfile2** starts an enumeration of profiles, retrieving the id of the first profile in the enumeration.

```
HRESULT GetFirstProfile2(
    [out] BSTR* p_pwsProfileId
);
```

Parameters:

p_pwsProfileId
[out] pointer to a pointer to a null terminated Unicode string containing the id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_SERVICE_ERROR - cannot connect to novaPDF Server service
NV_PROFILE_ERROR - cannot load profiles

1.4.11.4.97 GetFontOption

The **GetFontOption** method retrieves embed options for a given font

```
HRESULT GetFontOption(
    [in, string] LPCWSTR p_wsFontName,
    [out] BOOL* p_pbAlwaysEmbed,
    [out] BOOL* p_pbNeverEmbed
);
```

Parameters:

p_wsFontName
[in] font name
p_pbAlwaysEmbed
[out] pointer to a boolean that will contain the always embed flag for the font
p_pbNeverEmbed
[out] pointer to a boolean that will contain the never embed flag for the font

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong font name

1.4.11.4.98 GetFontOption2

The **GetFontOption2** method retrieves embed options for a given font

```
HRESULT GetFontOption2(  
    [in, string] BSTR p_wsFontName,  
    [out] BOOL* p_pbAlwaysEmbed,  
    [out] BOOL* p_pbNeverEmbed  
);
```

Parameters:

p_wsFontName
 [in] font name
p_pbAlwaysEmbed
 [out] pointer to a boolean that will contain the always embed flag for the font
p_pbNeverEmbed
 [out] pointer to a boolean that will contain the never embed flag for the font

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong font name

1.4.11.4.99 GetLayout

The **GetLayout** method retrieves the layout id for the specified object in the loaded profile

```
HRESULT GetLayout(  
    [in, string] LPCWSTR p_wsObjectId,  
    [in] LONG p_nIndex,  
    [out, string] LPWSTR* p_pwsLayoutId  
);
```

Parameters:

p_wsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
p_nIndex
 [in] layout index
p_pwsLayoutId
 [out] layout id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong object id
NV_INVALID_LAYOUT - layout not found for specified object

Remarks:

For layout options, see Working with Layout objects.

1.4.11.4.100 GetLayout2

The **GetLayout2** method retrieves the layout id for the specified object in the loaded profile

```
HRESULT GetLayout2(  
    [in, string] BSTR p_wsObjectId,  
    [in] LONG p_nIndex,  
    [out, string] BSTR* p_pwsLayoutId  
);
```

Parameters:

p_wsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
p_nIndex
 [out] layout index
p_pwsLayoutId
 [out] layout id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong object id
NV_INVALID_LAYOUT - layout not found for specified object

Remarks:

For layout options, see Working with Layout objects.

1.4.11.4.101 GetLayoutCount

The **GetLayoutCount** method retrieves the count of layout for the specified object in the loaded profile

```
HRESULT GetLayoutCount(  
    [in, string] LPCWSTR p_pwsObjectId,  
    [out] LONG* p_pnCount
```

```
);
```

Parameters:

```
p_pwsObjectId  
    [in] object id (watermark text, watermark image, overlay, signature or content)  
p_pnCount  
    [out] layouts count
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded  
NV_INVALID_OPTION - wrong object id
```

1.4.11.4.102 GetLayoutCount2

The **GetLayoutCount2** method retrieves the count of layout objects for the specified object in the loaded profile

```
HRESULT GetLayoutCount2(  
    [in, string] BSTR p_pwsObjectId,  
    [out] LONG* p_pnCount  
);
```

Parameters:

```
p_pwsObjectId  
    [in] object id (watermark text, watermark image, overlay, signature or content)  
p_pnCount  
    [out] layouts count
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded  
NV_INVALID_OPTION - wrong object id
```

1.4.11.4.103 GetLayoutOptionBool

The **GetLayoutOptionBool** method retrieves an option of boolean type for a layout object

```
HRESULT GetLayoutOptionBool(  
    [in, string] LPCWSTR p_pwsObjectId,  
    [in, string] LPCWSTR p_pwsLayoutId,  
    [in] LONG p_nOption,  
    [out] BOOL* p_pbValue  
);
```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
 p_pwsLayoutId
 [in] layout id (obtained with GetLayout)
 p_nOption
 [in] option constant
 p_pbValue
 [out] will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
 For layout options, see Working with Layout objects.

1.4.11.4.104 GetLayoutOptionBool2

The **GetLayoutOptionBool2** method retrieves an option of string type for a layout object

```

HRESULT GetLayoutOptionBool2(
    [in, string] BSTR p_pwsObjectId,
    [in, string] BSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [out] BOOL* p_pbValue
);
  
```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
 p_pwsLayoutId
 [in] layout id (obtained with GetLayout2)
 p_nOption
 [in] option constant
 p_pbValue
 [out] will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

For layout options, see Working with Layout objects.

1.4.11.4.105 GetLayoutOptionFloat

The **GetLayoutOptionFloat** method retrieves an option of float type for a layout object

```
HRESULT GetLayoutOptionFloat(
    [in, string] LPCWSTR p_pwsObjectId,
    [in, string] LPCWSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [out] FLOAT* p_pfValue
);
```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
 p_pwsLayoutId
 [in] layout id (obtained with GetLayout)
 p_nOption
 [in] option constant
 p_pfValue
 [out] will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

For layout options, see Working with Layout objects.

1.4.11.4.106 GetLayoutOptionFloat2

The **GetLayoutOptionFloat2** method retrieves an option of float type for a layout object

```
HRESULT GetLayoutOptionFloat2(
```

```

    [in, string] BSTR p_pwsObjectId,
    [in, string] BSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [out] FLOAT* p_pfValue
);

```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
 p_pwsLayoutId
 [in] layout id (obtained with GetLayout2)
 p_nOption
 [in] option constant
 p_pfValue
 [out] will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
 For layout options, see Working with Layout objects.

1.4.11.4.107 GetLayoutOptionLong

The **GetLayoutOptionLong** method retrieves an option of long type for a layout object

```

HRESULT GetLayoutOptionString(
    [in, string] LPCWSTR p_pwsObjectId,
    [in, string] LPCWSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [out] LONG* p_plValue
);

```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
 p_pwsLayoutId
 [in] layout id (obtained with GetLayout)
 p_nOption
 [in] option constant
 p_plValue
 [out] will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
For layout options, see Working with Layout objects.

1.4.11.4.108 GetLayoutOptionLong2

The **GetLayoutOptionLong2** method retrieves an option of long type for a layout object

```
HRESULT GetLayoutOptionLong2(  
    [in, string] BSTR p_pwsObjectId,  
    [in, string] BSTR p_pwsLayoutId,  
    [in] LONG p_nOption,  
    [out] LONG* p_plValue  
);
```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
 [in] layout id (obtained with GetLayout2)
p_nOption
 [in] option constant
p_plValue
 [out] will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
For layout options, see Working with Layout objects.

1.4.11.4.109 GetLayoutOptionString

The **GetLayoutOptionString** method retrieves an option of string type for a layout object

```
HRESULT GetLayoutOptionString(
    [in, string] LPCWSTR p_pwsObjectId,
    [in, string] LPCWSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [out] LPWSTR* p_pwsValue
);
```

Parameters:

p_pwsObjectId
[in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
[in] layout id (obtained with GetLayout)
p_nOption
[in] option constant
p_pwsValue
[out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
For layout options, see Working with Layout objects.

1.4.11.4.110 GetLayoutOptionString2

The **GetLayoutOptionString2** method retrieves an option of string type for a layout object

```
HRESULT GetLayoutOptionString2(
    [in, string] BSTR p_pwsObjectId,
    [in, string] BSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [out] BSTR* p_pwsValue
);
```

Parameters:

p_pwsObjectId
[in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
[in] layout id (obtained with GetLayout2)

```

p_nOption
    [in] option constant
p_pwsValue
    [out] pointer to a pointer to a null terminated Unicode string that will contain

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
For layout options, see Working with Layout objects.

1.4.11.4.111 GetNextProfile

The **GetNextProfile** continues an enumeration of profiles started with **GetFirstProfile**, retrieving the id of the next profile in the enumeration.

```

HRESULT GetNextProfile(
    [out] LPWSTR* p_pwsProfileId
);

```

Parameters:

```

p_pwsProfileId
    [out] pointer to a pointer to a null terminated Unicode string containing the name

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_ENUM_NOT_INIT - enumerate was not started, GetFirstProfile was not
called before
NV_NO_MORE_PROFILES - there are no more profiles to enumerate

```

Remarks:

GetNextProfile is used with **GetFirstProfile** to retrieve profile names.

Sample usage:

```

hr = GetFirstProfile(&pName);
while (SUCCEEDED(hr) && hr != NV_NO_MORE_PROFILES) {
    // do something with pName
    // ...
    CoTaskMemFree(pName);
    // get next profile if it exists
    hr = GetNextProfile(&pName);
}

```

1.4.11.4.112 GetNextProfile2

The **GetNextProfile2** continues an enumeration of profiles started with **GetFirstProfile**, retrieving the id of the next profile in the enumeration.

```
HRESULT GetNextProfile2(  
    [out] BSTR* p_pwsProfileId  
);
```

Parameters:

p_pwsProfileId
[out] pointer to a pointer to a null terminated Unicode string containing the name of the next profile

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_ENUM_NOT_INIT - enumerate was not started, GetFirstProfile was not called before
NV_NO_MORE_PROFILES - there are no more profiles to enumerate

1.4.11.4.113 GetOptionBool

The **GetOptionBool** method retrieves a printing option of boolean type

```
HRESULT GetOptionBool(  
    [in] LONG p_nOption,  
    [out] BOOL* p_pbValue  
);
```

Parameters:

p_nOption
[in] option constant
p_pbValue
[out] pointer to a boolean that will contain the value of the retrieved option.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.114 GetOptionEncryptedString

The **GetOptionEncryptedString** method retrieves an option of type encrypted string

```
HRESULT GetOptionEncryptedString(  
    [in] LONG    p_nOption,  
    [out] LPWSTR* p_pwsValue  
);
```

Parameters:

p_nOption
 [in] option constant

p_pwsValue
 [out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.115 GetOptionEncryptedString2

The **GetOptionEncryptedString** method retrieves an option of type encrypted string

```
HRESULT GetOptionEncryptedString(  
    [in] LONG    p_nOption,  
    [out] BSTR*  p_pwsValue  
);
```

Parameters:

p_nOption
 [in] option constant

p_pwsValue
 [out] pointer to a pointer to a BSTR string that will contain the value of the

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant

NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.116 GetOptionLong

The **GetOptionLong** method retrieves a printing option of long int type

```
HRESULT GetOptionLong(  
    [in] LONG p_nOption,  
    [out] LONG* p_plValue  
);
```

Parameters:

p_nOption
 [in] option constant

p_plValue
 [out] pointer to a long integer that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.117 GetOptionString

The **GetOptionString** method retrieves a printing option of string type for a given profile

```
HRESULT GetOptionString(  
    [in] LONG p_nOption,  
    [out] LPWSTR* p_pwsValue  
);
```

Parameters:

p_nOption
 [in] option constant

p_pwsValue

[out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.118 GetOptionString2

The **GetOptionString2** method retrieves a printing option of string type for a given profile

```
HRESULT GetOptionString2(  
    [in] LONG p_nOption,  
    [out] BSTR* p_pwsValue  
);
```

Parameters:

p_nOption
 [in] option constant

p_pwsValue
 [out] return the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.119 GetOverlay

The **GetOverlay** method retrieves the overlay

```
HRESULT GetOverlay(  
    [in] LONG p_nIndex,  
    [out, string] LPWSTR* p_pwsOverlayId
```

```
);
```

Parameters:

```
p_nIndex,  
    [in] - overlay index  
p_pwsOverlayId  
    [out, string] - overlay id
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded  
NV_PROFILE_ERROR - error reading profile
```

Remarks:

There can be multiple overlays in a profile.
For layout options, see Working with Layout objects.

1.4.11.4.120 GetOverlay2

The **GetOverlay2** method retrieves the overlay

```
HRESULT GetOverlay2(  
    [in] LONG p_nIndex,  
    [out, string] BSTR* p_pwsOverlayId  
);
```

Parameters:

```
p_nIndex,  
    [in] - overlay index  
p_pwsOverlayId  
    [out, string] - overlay id
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded  
NV_PROFILE_ERROR - error reading profile
```

Remarks:

There can be multiple overlays in a profile.
For layout options, see Working with Layout objects.

1.4.11.4.121 GetOverlayCount

The **GetOverlayCount** method retrieves the number of overlays.

```
HRESULT GetOverlayCount(  
    [out] LONG* p_pnCount  
);
```

Parameters:

p_pnCount
[out] count of overlays in profile

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.122 GetOverlayOptionBool

The **GetOverlayOptionBool** method retrieves an overlay option of boolean type

```
HRESULT GetOverlayOptionBool(
    [in, string] LPCWSTR p_wsOverlayId,
    [in] LONG p_nOption,
    [out] BOOL* p_pbValue
);
```

Parameters:

p_wsOverlayId
[in] overlay id (obtained with AddOverlay)
p_nOption
[in] option constant
p_pbValue
[out] pointer to a boolean that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.123 GetOverlayOptionBool2

The **GetOverlayOptionBool2** method retrieves an overlay option of boolean type

```
HRESULT GetOverlayOptionBool2(
    [in, string] BSTR p_wsOverlayId,
    [in] LONG p_nOption,
```

```
    [out] BOOL* p_pbValue
);
```

Parameters:

p_wsOverlayId
[in] overlay id (obtained with AddOverlay2)
p_nOption
[in] option constant
p_pbValue
[out] pointer to a boolean that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.124 GetOverlayOptionEncryptedString

The **GetOverlayOptionEncryptedString** method retrieves an overlay option of encrypted string type

```
HRESULT GetOverlayOptionEncryptedString(
    [in, string] LPCWSTR p_wsOverlayId,
    [in] LONG p_nOption,
    [out, string] LPWSTR* p_pwsValue
);
```

Parameters:

p_wsOverlayId
[in] overlay id (obtained with AddOverlay)
p_nOption
[in] option constant
p_pwsValue
[out] pointer to a string that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay id
NV_INVALID_OPTION - wrong option constant

NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.125 GetOverlayOptionEncryptedString2

The **GetOverlayOptionEncryptedString2** method retrieves an overlay option of encrypted string type

```
HRESULT GetOverlayOptionEncryptedString2(
    [in, string] BSTR p_wsOverlayId,
    [in] LONG p_nOption,
    [out, string] BSTR* p_pwsValue
);
```

Parameters:

p_wsOverlayId
 [in] overlay id (obtained with AddOverlay)
 p_nOption
 [in] option constant
 p_pwsValue
 [out] pointer to a string that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.126 GetOverlayOptionFloat

The **GetOverlayOptionFloat** method retrieves an overlay option of float type

```
HRESULT GetOverlayOptionFloat(
    [in, string] LPCWSTR p_wsOverlayId,
    [in] LONG p_nOption,
    [out] FLOAT* p_pfValue
);
```

Parameters:

p_wsOverlayId
 [in] overlay id (obtained with AddOverlay)
 p_nOption
 [in] option constant
 p_plValue
 [out] pointer to a float that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.127 GetOverlayOptionFloat2

The **GetOverlayOptionFloat2** method retrieves an overlay option of float type

```

HRESULT GetOverlayOptionFloat2(
    [in, string] BSTR p_wsOverlayId,
    [in] LONG p_nOption,
    [out] FLOAT* p_pfValue
);
  
```

Parameters:

p_wsOverlayId
 [in] overlay id (obtained with AddOverlay2)
 p_nOption
 [in] option constant
 p_pfValue
 [out] pointer to a float that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.128 GetOverlayOptionLong

The **GetOverlayOptionLong** method retrieves an overlay option of boolean type

```
HRESULT GetOverlayOptionLong(  
    [in, string] LPCWSTR p_wsOverlayId,  
    [in] LONG p_nOption,  
    [out] LONG* p_plValue  
);
```

Parameters:

p_wsOverlayId
 [in] overlay id (obtained with AddOverlay)
p_nOption
 [in] option constant
p_plValue
 [out] pointer to a long that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.129 GetOverlayOptionLong2

The **GetOverlayOptionLong2** method retrieves an overlay option of long type

```
HRESULT GetOverlayOptionBool2(  
    [in, string] BSTR p_wsOverlayId,  
    [in] LONG p_nOption,  
    [out] LONG* p_plValue  
);
```

Parameters:

p_wsOverlayId
 [in] overlay id (obtained with AddOverlay2)
p_nOption
 [in] option constant

p_plValue
[out] pointer to a long that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.130 GetOverlayOptionString

The **GetOverlayOptionString** method retrieves an overlay option of string type

```
HRESULT GetOverlayOptionString(
    [in, string] LPCWSTR p_wsOverlayId,
    [in] LONG p_nOption,
    [out, string] LPWSTR* p_pwsValue
);
```

Parameters:

p_wsOverlayId
[in] overlay id (obtained with AddOverlay)
 p_nOption
[in] option constant
 p_pwsValue
[out] pointer to a string that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.131 GetOverlayOptionString2

The **GetOverlayOptionString2** method retrieves an overlay option of string type

```
HRESULT GetOverlayOptionString2(  
    [in, string] BSTR p_wsOverlayId,  
    [in] LONG p_nOption,  
    [out, string] BSTR* p_pwsValue  
);
```

Parameters:

p_wsOverlayId
 [in] overlay id (obtained with AddOverlay2)
p_nOption
 [in] option constant
p_pwsValue
 [out] pointer to a string that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.132 GetOverrideOptionBool

The **GetOverrideOptionBool** method gets an override printing option of boolean type

```
HRESULT GetOverrideOptionBool(  
    [in] LONG p_nOption,  
    [out] BOOL* p_pbValue  
);
```

Parameters:

p_nOption
 [in] option constant
p_pbValue
 [out] bool value

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.133 GetOverrideOptionEncryptedString

The **GetOverrideOptionEncryptedString** method gets an override printing option of encrypted string type

```
HRESULT GetOverrideOptionEncryptedString(  
    [in] LONG    p_nOption,  
    [out, string] LPWSTR* p_pwsValue  
);
```

Parameters:

p_nOption
 [in] option constant
p_pwsValue
 [out] string value

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.134 GetOverrideOptionEncryptedString2

The **GetOverrideOptionEncryptedString2** method gets an override printing option of encrypted string type

```
HRESULT GetOverrideOptionEncryptedString2(  
    [in] LONG    p_nOption,  
    [out, string] BSTR* p_pwsValue  
);
```

Parameters:

p_nOption
 [in] option constant
p_pwsValue
 [out] string value

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called
 NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.135 GetOverrideOptionLong

The **GetOverrideOptionLong** method gets an override printing option of long type

```
HRESULT GetOverrideOptionLong(
    [in] LONG    p_nOption,
    [out] LONG*  p_pValue
);
```

Parameters:

p_nOption
 [in] option constant
 p_pValue
 [out] long integer value

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.136 GetOverrideOptionString

The **GetOverrideOptionString** method gets an override printing option of string type

```
HRESULT GetOverrideOptionString(
    [in] LONG    p_nOption,
    [out, string] LPWSTR* p_pwsValue
);
```

Parameters:

p_nOption
 [in] option constant
 p_pwsValue
 [out] string value

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called
 NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.137 GetOverrideOptionString2

The **GetOverrideOptionString2** method gets an override printing option of string type

```
HRESULT GetOverrideOptionString2(
    [in] LONG    p_nOption,
    [out, string] BSTR* p_pwsValue
);
```

Parameters:

p_nOption
 [in] option constant
 p_pwsValue
 [out] string value

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.138 GetPDFFileName

The **GetPDFFileName** method retrieves the name of the last generated PDF file.

```
HRESULT GetPDFFileName(
    [in] BOOL p_bPrintStarted,
    [out, string] LPWSTR* p_pwsFileName
);
```

Parameters:

p_bPrintStarted
 [in] flag, what file name to retrieve. See Remarks.
 p_pwsFileName
 [out] pointer to a pointer to a null terminated Unicode string that will contain the file name.
 On success this value must be freed by the caller with CoTaskMemFree.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called

Remarks:

Because the novaPDF SDK 10 works with the printer spooler queue, the documents sent to the printer are added to the queue. If there are already some other documents in the queue, the current document is not processed until the previous ones are finished.

There are two PDF file names you can find out, depending on the value of the p_bPrintStarted flag:

- the name of the PDF file that was just sent to the printer
- the name of the PDF file that is currently processed by the printer

This information is available only on the computer that starts the print job, if the PDF file is saved local and not on the network.

1.4.11.4.139 GetPDFFileName2

The **GetPDFFileName2** method retrieves the name of the last generated PDF file.

```
HRESULT GetPDFFileName2(  
    [in] BOOL p_bPrintStarted,  
    [out, string] BSTR* p_pwsFileName  
);
```

Parameters:

p_bPrintStarted
 [in] flag, what file name to retrieve. See Remarks.
p_pwsFileName
 [out] will contain the file name.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called

Remarks:

Because the novaPDF SDK 10 works with the printer spooler queue, the documents sent to the printer are added to the queue. If there are already some other documents in the queue, the current document is not processed until the previous ones are finished.

There are two PDF file names you can find out, depending on the value of the p_bPrintStarted flag:

- the name of the PDF file that was just sent to the printer
- the name of the PDF file that is currently processed by the printer

This information is available only on the computer that starts the print job, if the PDF file is saved local and not on the network.

1.4.11.4.140 GetSaveRule

The **GetSaveRule** method returns the save rule for the given index

```
HRESULT GetSaveRule(
    [in] LONG p_nIndex
    [out] LONG* p_pnType,
    [out, string] LPWSTR* p_pwsName,
    [out, string] LPWSTR* p_pwsDescription,
    [out, string] LPWSTR* p_pwsText,
    [out, string] LPWSTR* p_pwsFormat,
    [out] BOOL* p_pbEnabled
);
```

Parameters:

p_nIndex
[in] save rule index

p_pnType
[out] save rule type (0-remove from start, 1- remove from end, 2 - remove all,

p_pwsName
[out] rule name

p_pwsDescription
[out] rule description

p_pwsText
[out] text to remove or regular expression

p_pwsFormat
[out] format for regular expression

p_pbEnabled
[out] flag, tag is enabled

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_SAVE_RULE - invalid save rule index

Remarks:

This method retrieves information about the save rule at given index

1.4.11.4.141 GetSaveRule2

The **GetSaveRule2** method returns the save rule for the given index

```
HRESULT GetSaveRule2(
    [in] LONG p_nIndex
    [out] LONG* p_pnType,
    [out, string] BSTR* p_pwsName,
    [out, string] BSTR* p_pwsDescription,
    [out, string] BSTR* p_pwsText,
```

```
[out, string] BSTR* p_pwsFormat,  
[out] BOOL* p_pbEnabled  
);
```

Parameters:

p_nIndex
[in] save rule index

p_pnType
[out] save rule type (0-remove from start, 1- remove from end, 2 - remove all,

p_pwsName
[out] rule name

p_pwsDescription
[out] rule description

p_pwsText
[out] text to remove or regular expression

p_pwsFormat
[out] format for regular expression

p_pbEnabled
[out] flag, tag is enabled

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_SAVE_RULE - invalid save rule index

Remarks:

This method retrieves information about the save rule at given index

1.4.11.4.142 GetSaveRulesCount

The **GetSaveRulesCount** method returns save rules count

```
HRESULT GetSaveRulesCount(  
[out] LONG* p_pnCount  
);
```

Parameters:

p_pnCount
[in] tags count

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.143 GetSignature

The **GetSignature** method retrieves the signature and its layout object

```
HRESULT GetSignature(  
    [out, string] LPWSTR* p_pwsSignatureId  
    [out, string] LPWSTR* p_pwsLayoutId  
);
```

Parameters:

```
p_pwsSignatureId  
    [out, string] - signature id  
p_pwsLayoutId  
    [out, string] - layout id
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded  
NV_PROFILE_ERROR - error reading profile
```

Remarks:

There can be only one signature in a profile.
For layout options, see Working with Layout objects.

1.4.11.4.144 GetSignature2

The **GetSignature2** method retrieves the signature and its layout object

```
HRESULT GetSignature2(  
    [out, string] BSTR* p_pwsSignatureId  
    [out, string] BSTR* p_pwsLayoutId  
);
```

Parameters:

```
p_pwsSignatureId  
    [out, string] - signature id  
p_pwsLayoutId  
    [out, string] - layout id
```

Return values:

```
S_OK on success or COM error code  
NV_NOT_INITIALIZED - Initialize was not called  
NV_UNKNOWN_PROFILE - no profile loaded  
NV_PROFILE_ERROR - error reading profile
```

Remarks:

There can be only one signature in a profile.

For layout options, see Working with Layout objects.

1.4.11.4.145 GetUserTag

The **GetUserTag** method returns the user tag for the given index

```
HRESULT GetUserTag(  
    [in] LONG p_nIndex,  
    [out, string] LPWSTR* p_pwsTag,  
    [out, string] LPWSTR* p_pwsDefaultValue,  
    [out] BOOL* p_pbEnabled  
);
```

Parameters:

p_nIndex
 [in] tag index
p_wsTag
 [out] user tag
p_wsDefaultValue
 [out] default tag value
p_bEnabled
 [out] flag, tag is enabled

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_USER_TAG - invalid user tag index

Remarks:

This method returns information about the tag at position given by p_nIndex

1.4.11.4.146 GetUserTag2

The **GetUserTag2** method returns the user tag for the given index

```
HRESULT GetUserTag2(  
    [in] LONG p_nIndex,  
    [out, string] BSTR* p_pwsTag,  
    [out, string] BSTR* p_pwsDefaultValue,  
    [out] BOOL* p_pbEnabled  
);
```

Parameters:

p_nIndex
 [in] tag index
p_wsTag
 [out] user tag
p_wsDefaultValue
 [out] default tag value
p_bEnabled

[out] flag, tag is enabled

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_USER_TAG - invalid user tag index

Remarks:

This method returns information about the tag at position given by p_nIndex

1.4.11.4.147 GetUserTagsCount

The **GetUserTagsCount** method returns user tags count

```
HRESULT GetUserTagsCount(  
    [out] LONG* p_pnCount  
);
```

Parameters:

p_pnCount
[in] tags count

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.148 GetWatermarkImage

The **GetWatermarkImage** method retrieves an existing image watermark properties.

```
HRESULT GetWatermarkImage(  
    [in] LONG p_nIndex,  
    [out, string] LPWSTR* p_pwsWatermarkId  
);
```

Parameters:

p_nIndex,
[in] - watermark index
p_pwsWatermarkId
[out, string] - watermark id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong image watermark index

1.4.11.4.149 GetWatermarkImage2

The **GetWatermarkImage2** method retrieves an existing image watermark properties.

```
HRESULT GetWatermarkImage2(  
    [in] LONG p_nIndex,  
    [out, string] BSTR* p_pwsWatermarkId  
);
```

Parameters:

p_nIndex,
 [in] - watermark index
p_pwsWatermarkId
 [out, string] - watermark id

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong image watermark index

1.4.11.4.150 GetWatermarkImageCount

The **GetWatermarkImageCount** method retrieves the number of image watermarks.

```
HRESULT GetWatermarkImageCount(  
    [out] SHORT* p_pnCount  
);
```

Parameters:

p_pnCount
 [out] count of image watermarks

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.151 GetWatermarkImageOptionBool

The **GetWatermarkImageOptionBool** method retrieves a watermark image option of boolean type

```
HRESULT GetWatermarkImageOptionBool(  
    [in, string] LPCWSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out] BOOL* p_pbValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage)
 p_nOption
 [in] option constant
 p_pbValue
 [out] pointer to a boolean that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.152 GetWatermarkImageOptionBool2

The **GetWatermarkImageOptionBool2** method retrieves a watermark image option of boolean type

```

HRESULT GetWatermarkImageOptionBool2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] BOOL* p_pbValue
);
  
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage2)
 p_nOption
 [in] option constant
 p_pbValue
 [out] pointer to a boolean that will contain the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.153 GetWatermarkImageOptionEncryptedString

The **GetWatermarkImageOptionEncryptedString** method retrieves a watermark image option of encrypted string type

```
HRESULT GetWatermarkImageOptionEncryptedString(  
    [in, string] LPCWSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out, string] LPWSTR* p_pwsValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage)
p_nOption
 [in] option constant
p_pwsValue
 [out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.154 GetWatermarkImageOptionEncryptedString2

The **GetWatermarkImageOptionEncryptedString2** method retrieves a watermark image option of encrypted string type

```
HRESULT GetWatermarkImageOptionEncryptedString2(  
    [in, string] BSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out, string] BSTR* p_pwsValue  
);
```

Parameters:

```

p_pwsWatermarkId
    [in] watermark id (obtained with GetWatermarkImage2 )
p_nOption
    [in] option constant
p_pwsValue
    [out] pointer to a pointer to a null terminated Unicode string that will contain

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.155 GetWatermarkImageOptionFloat

The **GetWatermarkImageOptionFloat** method retrieves a watermark image option of float type

```

HRESULT GetWatermarkImageOptionFloat(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] FLOAT* p_pfValue
);

```

Parameters:

```

p_pwsWatermarkId
    [in] watermark id (obtained with GetWatermarkImage )
p_nOption
    [in] option constant
p_pfValue
    [out] pointer to a pointer to a null terminated Unicode string that will contain

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include

folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.156 GetWatermarkImageOptionFloat2

The **GetWatermarkImageOptionFloat2** method retrieves a watermark image option of boolean type

```
HRESULT GetWatermarkImageOptionFloat2(  
    [in, string] BSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out] FLOAT* p_pfValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage2)
p_nOption
 [in] option constant
p_pbValue
 [out] the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.157 GetWatermarkImageOptionLong

The **GetWatermarkImageOptionLong** method retrieves a watermark image option of long int type

```
HRESULT GetWatermarkImageOptionLong(  
    [in, string] LPCWSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out] LONG* p_plValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage)
p_nOption
 [in] option constant

p_plValue
 [out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.158 GetWatermarkImageOptionLong2

The **GetWatermarkImageOptionLong2** method retrieves a watermark image option of long type

```
HRESULT GetWatermarkImageOptionLong2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] LONG* p_plValue
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage2)
 p_nOption
 [in] option constant
 p_plValue
 [out] the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.159 GetWatermarkImageOptionString

The **GetWatermarkImageOptionString** method retrieves a watermark image option of string type

```
HRESULT GetWatermarkImageOptionString(  
    [in, string] LPCWSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out, string] LPWSTR* p_pwsValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage)
p_nOption
 [in] option constant
p_pwsValue
 [out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.160 GetWatermarkImageOptionString2

The **GetWatermarkImageOptionString2** method retrieves a watermark image option of string type

```
HRESULT GetWatermarkImageOptionString2(  
    [in, string] BSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out, string] BSTR* p_pwsValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkImage2)
p_nOption
 [in] option constant
p_pwsValue
 [out] the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.161 GetWatermarkTextOptionBool

The **GetWatermarkTextOptionBool** method retrieves a watermark text option of boolean type

```

HRESULT GetWatermarkTextOptionBool(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] BOOL* p_pbValue
);

```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkText)
 p_nOption
 [in] option constant
 p_plValue
 [out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_TXT - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.162 GetWatermarkTextOptionBool2

The **GetWatermarkTextOptionBool2** method retrieves a watermark text option of boolean type

```

HRESULT GetWatermarkTextOptionBool2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] BOOL* p_pbValue
);

```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkText2)

p_nOption
 [in] option constant

p_pbValue
 [out] the value of the retrieved option

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_WATERMARK_TXT - wrong watermark id

NV_INVALID_OPTION - wrong option constant

NV_PROFILE_ERROR - cannot find option in profile

NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.163 GetWatermarkTextOptionFloat

The **GetWatermarkTextOptionFloat** method retrieves a watermark text option of float type

```

HRESULT GetWatermarkTextOptionFloat(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] FLOAT* p_pfValue
);

```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkText)

p_nOption
 [in] option constant

p_pfValue
 [out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_WATERMARK_TXT - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.164 GetWatermarkTextOptionFloat2

The **GetWatermarkTextOptionFloat2** method retrieves a watermark text option of boolean type

```
HRESULT GetWatermarkTextOptionFloat2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] FLOAT* p_pfValue
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkText2)
 p_nOption
 [in] option constant
 p_pbValue
 [out] the value of the retrieved option

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_TXT - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.165 GetWatermarkTextOptionLong

The **GetWatermarkTextOptionLong** method retrieves a watermark text option of long int type

```
HRESULT GetWatermarkTextOptionLong(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out] LONG* p_plValue
);
```

Parameters:

p_pwsWatermarkId
[in] watermark id (obtained with GetWatermarkText)
p_nOption
[in] option constant
p_plValue
[out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.166 GetWatermarkTextOptionLong2

The **GetWatermarkTextOptionLong2** method retrieves a watermark text option of long type

```
HRESULT GetWatermarkTextOptionLong2(  
    [in, string] BSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [out] LONG* p_plValue  
);
```

Parameters:

p_pwsWatermarkId
[in] watermark id (obtained with GetWatermarkText2)
p_nOption
[in] option constant
p_plValue
[out] the value of the retrieved option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.167 GetWatermarkTextOptionString

The **GetWatermarkTextOptionString** method retrieves a watermark text option of string type

```
HRESULT GetWatermarkTextOptionString(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out, string] LPWSTR* p_pwsValue
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkText)
 p_nOption
 [in] option constant
 p_pwsValue
 [out] pointer to a pointer to a null terminated Unicode string that will contain

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_TXT - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.168 GetWatermarkTextOptionString2

The **GetWatermarkTextOptionString2** method retrieves a watermark text option of string type

```
HRESULT GetWatermarkTextOptionString2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [out, string] BSTR* p_pwsValue
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with GetWatermarkText2)
 p_nOption

```

[in] option constant
p_pwsValue
[out] the value of the retrieved option

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.169 GetWatermarkText

The **GetWatermarkText** method retrieves an existing image watermark properties.

```

HRESULT GetWatermarkText(
    [in] LONG p_nIndex,
    [out, string] LPWSTR* p_pwsWatermarkId
);

```

Parameters:

```

p_nIndex,
[in] - watermark index
p_pwsWatermarkId
[out, string] - watermark id

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong image watermark index

```

1.4.11.4.170 GetWatermarkText2

The **GetWatermarkText2** method retrieves an existing image watermark properties.

```

HRESULT GetWatermarkText2(
    [in] LONG p_nIndex,
    [out, string] BSTR* p_pwsWatermarkId
);

```

Parameters:

```

p_nIndex,
[in] - watermark index
p_pwsWatermarkId

```

[out, string] - watermark id

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong image watermark index

1.4.11.4.171 GetWatermarkTextCount

The **GetWatermarkTextCount** method retrieves the number of image watermarks.

```
HRESULT GetWatermarkTextCount(
    [out] SHORT* p_pnCount
);
```

Parameters:

p_pnCount
 [out] count of image watermarks

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded

1.4.11.4.172 Initialize

The **Initialize** method initializes the INovaPdfOptions interface

```
HRESULT Initialize(
    [in] LPCWSTR p_wsPrinterName,
    [in] LPCWSTR p_wsLicenseKey
);
```

Parameters:

p_wsPrinterName
 [in] pointer to a null terminated Unicode string containing the name of the printer
 p_wsLicenseKey
 [in] pointer to a null terminated Unicode string containing the license key

Return values:

S_OK on success or COM error code
 NV_INVALID_PRINTER_NAME - cannot find printer with given printer name
 NV_NOT_A_NOVAPDF_PRINTER - printer is not a novaPDF SDK 10
 NV_INVALID_LICENSE - cannot read license or not a SDK license
 NV_SERVICE_ERROR - cannot connect to novaPDF Server service

Remarks:

This method must be called prior to calling any method from the INovaPdfOptions interface.

1.4.11.4.173 Initialize2

The **Initialize2** method initializes the INovaPdfOptions interface

```
HRESULT Initialize2(  
    [in] BSTR p_wsPrinterName,  
    [in] BSTR p_wsLicenseKey  
);
```

Parameters:

p_wsPrinterName
[in] printer name
p_wsLicenseKey
[in] license key

Return values:

S_OK on success or COM error code
NV_INVALID_PRINTER_NAME - cannot find printer with given printer name
NV_NOT_A_NOVAPDF_PRINTER - printer is not a novaPDF SDK 10
NV_INVALID_LICENSE - cannot read license or not a SDK license
NV_SERVICE_ERROR - cannot connect to novaPDF Server service

Remarks:

This method must be called prior to calling any method from the INovaPdfOptions interface.

1.4.11.4.174 InitializeOLEUsage

The **InitializeOLEUsage** method initializes the OLE server licensing

```
HRESULT InitializeOLEUsage(  
    [in] BSTR p_pwstrOLEProgID,  
);
```

Parameters:

p_pwstrOLEProgID
[in] pointer to a Unicode string containing the ProgID for the OLE server that

Return values:

S_OK on success or COM error code

Remarks:

This method must be called prior to initializing the OLE object that will perform the print to the novaPDF SDK 10.

1.4.11.4.175 InitializeSilent

The **InitializeSilent** method initializes the INovaPdfOptions interface silently

```
HRESULT InitializeSilent(  
    [in] LPCWSTR p_wsPrinterName,  
    [in] LPCWSTR p_wsLicenseKey  
);
```

Parameters:

```

p_wsPrinterName
    [in] pointer to a null terminated Unicode string containing the name of the printer
p_wsLicenseKey
    [in] pointer to a null terminated Unicode string containing the license key

```

Return values:

S_OK on success or COM error code
 NV_INVALID_PRINTER_NAME - cannot find printer with given printer name
 NV_NOT_A_NOVAPDF_PRINTER - printer is not a novaPDF SDK 10
 NV_INVALID_LICENSE - cannot read license or not a SDK license
 NV_SERVICE_ERROR - cannot connect to novaPDF Server service

Remarks:

This method can be used instead of the Initialize method, when you don't want to have message boxes shown with error messages. Use it when your application runs as a windows service or on a server computer .

1.4.11.4.176 InitializeSilent2

The **InitializeSilent2** method initializes the INovaPdfOptions interface silently

```

HRESULT InitializeSilent2(
    [in] BSTR p_wsPrinterName,
    [in] BSTR p_wsLicenseKey
);

```

Parameters:

```

p_wsPrinterName
    [in] pointer to a BSTR containing the name of the printer to configure
p_wsLicenseKey
    [in] pointer to a BSTR containing the license key

```

Return values:

S_OK on success or COM error code
 NV_INVALID_PRINTER_NAME - cannot find printer with given printer name
 NV_NOT_A_NOVAPDF_PRINTER - printer is not a novaPDF SDK 10
 NV_INVALID_LICENSE - cannot read license or not a SDK license
 NV_SERVICE_ERROR - cannot connect to novaPDF Server service

Remarks:

This method can be used instead of the Initialize method, when you don't want to have message boxes shown with error messages. Use it when your application runs as a windows service or on a server computer .

1.4.11.4.177 LicenseApplication

The **LicenseApplication** method licences an application to print to novaPDF

```

HRESULT LicenseApplication(
    [in] BSTR p_pwstrAppName,
);

```

Parameters:

p_pwstrAppName
[in] pointer to a Unicode string containing the name of the application that will be launched.

Return values:

S_OK on success or COM error code

Remarks:

This method must be called prior to launching the application with the specified name. This call assures that the application will print without the notice on bottom of pages.

1.4.11.4.178 LicenseOLEServer

The **LicenseOLEServer** method license the OLE server prior initialized with InitializeOLEServer

```
HRESULT LicenseOLEServer(void);
```

Return values:

S_OK on success or COM error code

Remarks:

This method must be called after initializing the OLE object that will perform the print to the novaPDF SDK 10

1.4.11.4.179 LicenseShellExecuteFile

The **LicenseShellExecuteFile** method licences a document to be printed with ShellExecute

```
HRESULT LicenseShellExecuteFile(  
    [in] BSTR p_pwstrFileName,  
);
```

Parameters:

p_pwstrFileName
[in] pointer to a Unicode string containing the name of the file that will be printed.

Return values:

S_OK on success or COM error code

Remarks:

This method must be called prior to calling the ShellExecute function for the given parameter. This call assures that the document will be printed without the notice on bottom of pages, even if the application that prints the document is already opened.

1.4.11.4.180 LoadProfile

The **LoadProfile** method loads an existing profile.

```
HRESULT LoadProfile(  
    [in] LPCWSTR p_wsProfileId  
);
```

Parameters:

p_wsProfileId
 [in] pointer to a null terminated Unicode string containing the id of the profile

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_SERVICE_ERROR - error connecting to novaPDF Server service
 NV_PROFILE_ERROR - error reading profiles

1.4.11.4.181 LoadProfile2

The **LoadProfile2** method loads an existing profile.

```
HRESULT LoadProfile2(
    [in] BSTR p_wsProfileId
);
```

Parameters:

p_wsProfileId
 [in] id of the profile to load

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_SERVICE_ERROR - error connecting to novaPDF Server service
 NV_PROFILE_ERROR - error reading profiles

1.4.11.4.182 ModifyBookmarkDefinition

The **ModifyBookmarkDefinition** method modifies an existing bookmark definition, having the characteristics specified by the method parameters.

```
HRESULT ModifyBookmarkDefinition(
    [in] SHORT p_nDefinition,
    [in] SHORT p_nHeading,
    [in] BOOL p_bEnabled,
    [in] BOOL p_bDetFont,
    [in, string] LPCWSTR p_wsDetFont,
    [in] BOOL p_bDetStyle,
    [in] BOOL p_bDetBold,
    [in] BOOL p_bDetItalic,
    [in] BOOL p_bDetSize,
    [in] FLOAT p_nDetSizeVal,
    [in] FLOAT p_nDetSizePt,
    [in] BOOL p_bDetColor,
    [in] LONG p_nDetColor,
    [in] BOOL p_bDispAsBold,
    [in] BOOL p_bDispAsItalic,
    [in] LONG p_nDispColor
);
```

Parameters:

p_nDefinition

[in]definition index
 p_nHeading
 [in]heading index
 p_bEnabled
 [in]definition is enabled
 p_bDetFont
 [in] detect font flag
 p_wsDetFont
 [in] font name
 p_bDetStyle
 [in] detect font style
 p_bDetBold
 [in] bold font
 p_bDetItalic
 [in] italic font
 p_bDetSize
 [in] detect font size
 p_nDetSizeVal
 [in] font size
 p_nDetSizePt
 [in] font size rounding
 p_bDetColor
 [in] detect font color
 p_nDetColor
 [in] font color (RGB value)
 p_bDispAsBold
 [in] display bookmark font bold
 p_bDispAsItalic
 [in] display bookmark font italic
 p_nDispColor
 [in] display bookmark font color
 p_wsProfileName
 [in] pointer to a null terminated Unicode string containing the profile to modify
 p_bPublicProfile
 [in] Flag if the profile is a public or a private profile.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_BOOKMARK_DEF - wrong bookmark definition index

1.4.11.4.183 ModifyBookmarkDefinition2

The **ModifyBookmarkDefinition2** method modifies an existing bookmark definition, having the characteristics specified by the method parameters.

```

HRESULT ModifyBookmarkDefinition2(
    [in] SHORT p_nDefinition,
    [in] SHORT p_nHeading,
    [in] BOOL p_bEnabled,
    [in] BOOL p_bDetFont,

```

```

[in, string] BSTR p_wsDetFont,
[in] BOOL p_bDetStyle,
[in] BOOL p_bDetBold,
[in] BOOL p_bDetItalic,
[in] BOOL p_bDetSize,
[in] FLOAT p_nDetSizeVal,
[in] FLOAT p_nDetSizePt,
[in] BOOL p_bDetColor,
[in] LONG p_nDetColor,
[in] BOOL p_bDispAsBold,
[in] BOOL p_bDispAsItalic,
[in] LONG p_nDispColor,
[in, string] BSTR p_wsProfileName,
[in] BOOL p_bPublicProfile
);

```

Parameters:

p_nDefinition
[in] definition index

p_nHeading
[in] heading index

p_bEnabled
[in] definition is enabled

p_bDetFont
[in] detect font flag

p_wsDetFont
[in] font name

p_bDetStyle
[in] detect font style

p_bDetBold
[in] bold font

p_bDetItalic
[in] italic font

p_bDetSize
[in] detect font size

p_nDetSizeVal
[in] font size

p_nDetSizePt
[in] font size rounding

p_bDetColor
[in] detect font color

p_nDetColor
[in] font color (RGB value)

p_bDispAsBold
[in] display bookmark font bold

p_bDispAsItalic
[in] display bookmark font italic

p_nDispColor
[in] display bookmark font color

p_wsProfileName
[in] pointer to a BSTR containing the profile to modify. If this parameter is a

p_bPublicProfile
[in] Flag if the profile is a public or a private profile.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_BOOKMARK_DEF - wrong bookmark definition index

1.4.11.4.184 RegisterEventWindow

The **RegisterEventWindow** registers a window with the printer in order to receive printing messages.

```
HRESULT RegisterEventWindow(  
    [in] LONG p_hwnd  
);
```

Parameters:

p_hwnd
[in] handle to the window (cast to a LONG value), that will receive the printer

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called

1.4.11.4.185 RegisterNovaEvent

The **RegisterNovaEvent** registers a Windows event that will be signaled by the printer

```
HRESULT RegisterNovaEvent(  
    [in] LPCWSTR p_wsEventName  
);
```

Parameters:

p_wsEventName
[in] Name of the event. See How to use events topic for a list of possible even

Return values:

S_OK - on success
S_FALSE - event cannot be created

1.4.11.4.186 RegisterNovaEvent2

The **RegisterNovaEvent2** registers a Windows event that will be signaled by the printer

```
HRESULT RegisterNovaEvent2(  
    [in] BSTR p_wsEventName  
);
```

Parameters:

p_wsEventName
[in] Name of the event. See How to use events topic for a list of possible even

Return values:

S_OK - on success
S_FALSE - event cannot be created

1.4.11.4.187 RestoreDefaultPrinter

The **RestoreDefaultPrinter** method restores the default printer to the printer that was default before calling SetDefaultPrinter.

```
HRESULT RestoreDefaultPrinter(void);
```

Parameters:

none

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_NODEFAULT_PRINTER - SetDefaultPrinter was not called

Remarks:

After calling SetDefaultPrinter with an INovaPdfOptions object, call RestoreDefaultPrinter with the same object to restore the original default printer.

1.4.11.4.188 SaveProfile

The **SaveProfile** method loads an existing profile.

```
HRESULT SaveProfile(void);
```

Parameters:

none

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_SERVICE_ERROR - error connecting to novaPDF Server service
NV_NO_PROFILE - no profile loaded
NV_PROFILE_ERROR - error reading profiles
NV_PROFILE_SAVE_ERROR - error saving profile

1.4.11.4.189 SetActionOptionBool

The **SetActionOptionBool** method sets an option of boolean type for an action

```
HRESULT SetActionOptionBool(
    [in, string] LPCWSTR p_pwsActionId,
    [in] LONG      p_nOption,
    [in] BOOL      p_bValue
);
```

Parameters:

p_pwsActionId
[in] Action id
p_wsOption

[in] option constant
p_bValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.190 SetActionOptionBool2

The **SetActionOptionBool2** method sets an option of boolean type for an action

```
HRESULT SetActionOptionBool2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [in] BOOL      p_bValue  
);
```

Parameters:

p_pwsActionId
[in] Action id
p_wsOption
[in] option constant
p_bValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.191 SetActionOptionEncryptedString

The **SetActionOptionEncryptedString** method sets an option of encrypted string type for an action

```
HRESULT SetActionOptionEncryptedString(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [in, string] LPCWSTR p_wsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_wsValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.192 SetActionOptionEncryptedString2

The **SetActionOptionEncryptedString2** method sets an option of encrypted string type for an action

```
HRESULT SetActionOptionEncryptedString2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [in, string] BSTR p_wsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant

p_wsValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.193 SetActionOptionFloat

The **SetActionOptionFloat** method sets an option of float type for an action

```
HRESULT SetActionOptionFloat(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [in] FLOAT     p_fValue  
);
```

Parameters:

p_pwsActionId
[in] Action id
p_wsOption
[in] option constant
p_fValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.194 SetActionOptionFloat2

The **SetActionOptionFloat2** method sets an option of float type for an action

```
HRESULT SetActionOptionFloat2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG     p_nOption,  
    [in] FLOAT    p_fValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_fValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.195 SetActionOptionLong

The **SetActionOptionLong** method sets an option of float type for an action

```
HRESULT SetActionOptionLong(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG     p_nOption,  
    [in] LONG     p_nValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_nValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.196 SetActionOptionLong2

The **SetActionOptionLong2** method sets an option of float type for an action

```
HRESULT SetActionOptionLong2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [in] LONG      p_nValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_nValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.197 SetActionOptionString

The **SetActionOptionString** method sets an option of string type for an action

```
HRESULT SetActionOptionString(  
    [in, string] LPCWSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [in, string] LPCWSTR p_wsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_wsValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_ACTION - wrong action id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.198 SetActionOptionString2

The **SetActionOptionString2** method sets an option of string type for an action

```
HRESULT SetActionOptionString2(  
    [in, string] BSTR p_pwsActionId,  
    [in] LONG      p_nOption,  
    [in, string] BSTR p_wsValue  
);
```

Parameters:

p_pwsActionId
 [in] Action id
p_wsOption
 [in] option constant
p_wsValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_ACTION - wrong action id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.199 SetActiveProfile

The **SetActiveProfile** sets the active profile (i.e. the profile that will be used for printing).

```
HRESULT SetActiveProfile(
    [in] LPCWSTR p_wsProfileId
);
```

Parameters:

p_wsProfileId
 [in] pointer to a null terminated Unicode string that contains the id of the profile

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - the profile specified by p_wsProfileId does not exist
 NV_PUBLIC_PROFILE - active profile cannot be change due to propagate active profile flag
 NV_PROFILE_ERROR - private active profile cannot be set because private profiles are not supported

1.4.11.4.200 SetActiveProfile2

The **SetActiveProfile2** sets the active profile (i.e. the profile that will be used for printing).

```
HRESULT SetActiveProfile2(
    [in] BSTR* p_wstrProfileId
);
```

Parameters:

p_wstrProfileName
 [in] pointer to a BSTR that contains the id of the profile that is to be set as active

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - the profile specified by p_wstrProfileId does not exist
 NV_PUBLIC_PROFILE - active profile cannot be change due to propagate

active profile flag

NV_PROFILE_ERROR - private active profile cannot be set because private profiles a

1.4.11.4.201 SetCustomProperty

The **SetCustomProperty** method changes the custom property for the given index

```
HRESULT SetCustomProperty(
    [in] LONG p_nIndex,
    [in, string] LPCWSTR p_wsPropertyName,
    [in, string] LPCWSTR p_wsPropertyValue,
    [in] BOOL p_bEnabled
);
```

Parameters:

p_nIndex
[in] custom property index

p_wsPropertyName
[in] custom property name

p_wsPropertyValue
[in] custom property value

p_bEnabled
[in] flag, custom property is enabled

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_CUSTOM_PROPERTY - invalid custom property index

Remarks:

This method changes information for the custom property at position given by p_nIndex

1.4.11.4.202 SetCustomProperty2

Enter topic text here.

1.4.11.4.203 SetDefaultPrinter

The **SetDefaultPrinter** method sets the current printer (the one specified in Initialize) as default printer.

```
HRESULT SetDefaultPrinter(void);
```

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

Remarks:

After calling **SetDefaultPrinter** with an INovaPdfOptions object, call RestoreDefaultPrinter with the same object to restore the original default printer. Do not call **SetDefaultPrinter** twice,

without calling `RestoreDefaultPrinter` between the calls or else the original default printer will not be restored.

1.4.11.4.204 SetFontOption

The **SetFontOption** method sets embed options for a given font

```
HRESULT SetFontOption(  
    [in, string] LPCWSTR p_wsFontName,  
    [in] BOOL p_bAlwaysEmbed,  
    [in] BOOL p_bNeverEmbed  
);
```

Parameters:

`p_wsFontName`
[in] font name
`p_bAlwaysEmbed`
[out] always embed flag for the font
`p_bNeverEmbed`
[out] never embed flag for the font

Return values:

`S_OK` on success or COM error code
`NV_NOT_INITIALIZED` - Initialize was not called
`NV_UNKNOWN_PROFILE` - no profile loaded
`NV_INVALID_OPTION` - wrong font name

1.4.11.4.205 SetFontOption2

The **SetFontOption2** method sets embed options for a given font

```
HRESULT SetFontOption2(  
    [in, string] BSTR p_wsFontName,  
    [in] BOOL p_bAlwaysEmbed,  
    [in] BOOL p_bNeverEmbed  
);
```

Parameters:

`p_wsFontName`
[in] font name
`p_bAlwaysEmbed`
[out] always embed flag for the font
`p_bNeverEmbed`
[out] never embed flag for the font

Return values:

`S_OK` on success or COM error code
`NV_NOT_INITIALIZED` - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong font name

1.4.11.4.206 SetLayoutOptionBool

The **SetLayoutOptionBool** method sets an option of boolean type for a layout object

```
HRESULT SetLayoutOptionBool(
    [in, string] LPCWSTR p_pwsObjectId,
    [in, string] LPCWSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [in] BOOL p_bValue
);
```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
 p_pwsLayoutId
 [in] layout id (obtained with GetLayout)
 p_wsOption
 [in] option constant
 p_bValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

For layout options, see Working with Layout objects.

1.4.11.4.207 SetLayoutOptionBool2

The **SetLayoutOptionBool2** method sets an option of boolean type for a layout object

```
HRESULT SetLayoutOptionBool2(
    [in, string] BSTR p_pwsObjectId,
    [in, string] BSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [in] BOOL p_bValue
);
```

Parameters:

p_pwsObjectId

```

    [in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
    [in] layout id (obtained with GetLayout2 )
p_wsOption
    [in] option constant
p_bValue
    [in] the value of the option to set.

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
For layout options, see Working with Layout objects.

1.4.11.4.208 SetLayoutOptionFloat

The **SetLayoutOptionFloat** method sets an option of float type for a layout object

```

HRESULT SetLayoutOptionFloat(
    [in, string] LPCWSTR p_pwsObjectId,
    [in, string] LPCWSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [in] FLOAT p_fValue
);

```

Parameters:

```

p_pwsObjectId
    [in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
    [in] layout id (obtained with GetLayout )
p_wsOption
    [in] option constant
p_fValue
    [in] the value of the option to set.

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include

folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
For layout options, see Working with Layout objects.

1.4.11.4.209 SetLayoutOptionFloat2

The **SetLayoutOptionFloat2** method sets an option of boolean type for a layout object

```
HRESULT SetLayoutOptionFloat2(
    [in, string] BSTR p_pwsObjectId,
    [in, string] BSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [in] FLOAT p_fValue
);
```

Parameters:

```
p_pwsObjectId
    [in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
    [in] layout id (obtained with GetLayout2 )
p_wsOption
    [in] option constant
p_fValue
    [in] the value of the option to set.
```

Return values:

```
S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long
```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
For layout options, see Working with Layout objects.

1.4.11.4.210 SetLayoutOptionLong

The **SetLayoutOptionLong** method sets an option of long type for a layout object

```
HRESULT SetLayoutOptionLong(
    [in, string] LPCWSTR p_pwsObjectId,
    [in, string] LPCWSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [in] LONG p_lValue
);
```

Parameters:

```
p_pwsObjectId
    [in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
```

[in] layout id (obtained with GetLayout)
 p_wsOption
 [in] option constant
 p_lValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

For layout options, see Working with Layout objects.

1.4.11.4.211 SetLayoutOptionLong2

The **SetLayoutOptionLong2** method sets an option of long type for a layout object

```
HRESULT SetLayoutOptionLong2(
    [in, string] BSTR p_pwsObjectId,
    [in, string] BSTR p_pwsLayoutId,
    [in] LONG p_nOption,
    [in] LONG p_lValue
);
```

Parameters:

p_pwsObjectId
 [in] object id (watermark text, watermark image, overlay, signature or content)
 p_pwsLayoutId
 [in] layout id (obtained with GetLayout2)
 p_wsOption
 [in] option constant
 p_lValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

For layout options, see Working with Layout objects.

1.4.11.4.212 SetLayoutOptionString

The **SetLayoutOptionString** method sets an option of string type for a layout object

```
HRESULT SetLayoutOptionString(
    [in, string] LPCWSTR p_pwsObjectId,
    [in, string] LPCWSTR p_pwsLayoutId,
    [in] LONG      p_nOption,
    [in] LPCWSTR p_wsValue
);
```

Parameters:

p_pwsObjectId
[in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
[in] layout id (obtained with GetLayout)
p_wsOption
[in] option constant
p_wsValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

For layout options, see Working with Layout objects.

1.4.11.4.213 SetLayoutOptionString2

The **SetLayoutOptionString2** method sets an option of string type for a layout object

```
HRESULT SetLayoutOptionString2(
    [in, string] BSTR p_pwsObjectId,
    [in, string] BSTR p_pwsLayoutId,
    [in] LONG      p_nOption,
    [in] BSTR      p_wsValue
);
```

Parameters:

p_pwsObjectId
[in] object id (watermark text, watermark image, overlay, signature or content)
p_pwsLayoutId
[in] layout id (obtained with GetLayout2)
p_wsOption
[in] option constant

p_wsValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.
 For layout options, see Working with Layout objects.

1.4.11.4.214 SetOptionBool

The **SetOptionBool** method sets a printing option of boolean type

```
HRESULT SetOptionBool(
    [in] LONG    p_nOption,
    [in] BOOL    p_bValue
);
```

Parameters:

p_nOption
[in] option constant
 p_bValue
[in] long integer value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.215 SetOptionEncryptedString

The **SetOptionEncryptedString** method sets an encrypted string option

```
HRESULT SetOptionEncryptedString(
    [in] LONG    p_nOption,
    [in] LPCWSTR p_wsValue
);
```

Parameters:

p_wsOption
[in] option constant

p_wsValue
[in] the value of the option to set

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_OPTION - wrong option constant

NV_PROFILE_ERROR - cannot find option in profile

NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.216 SetOptionEncryptedString2

The **SetOptionEncryptedString2** method sets an encrypted string option

```
HRESULT SetOptionEncryptedString2(
    [in] LONG p_nOption,
    [in] BSTR p_wsValue
);
```

Parameters:

p_wsOption
[in] option constant

p_wsValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_OPTION - wrong option constant

NV_PROFILE_ERROR - cannot find option in profile

NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.217 SetOptionLong

The **SetOptionLong** method sets a printing option of long int type

```
HRESULT SetOptionLong(
```



```
    [in] LONG    p_nOption,  
    [in] LONG    p_lValue  
);
```

Parameters:

p_nOption
[in] option constant
p_lValue
[in] long integer value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.218 SetOptionString

The **SetOptionString** method sets a printing option of string type

```
HRESULT SetOptionString(  
    [in] LONG    p_nOption,  
    [in] LPCWSTR p_wsValue  
);
```

Parameters:

p_wsOption
[in] option constant
p_wsValue
[in] pointer to a null terminated Unicode string containing the value of the option

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.219 SetOptionString2

The **SetOptionString2** method sets a printing option of string type

```
HRESULT SetOptionString2(
    [in] LONG p_nOption,
    [in] BSTR p_wsValue
);
```

Parameters:

p_wsOption
[in] option constant

p_wsValue
[in] pointer to a null terminated Unicode string containing the value of the option

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_OPTION - wrong option constant

NV_PROFILE_ERROR - cannot find option in profile

NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.220 SetOverlayOptionBool

The **SetOverlayOptionBool** method sets an overlay option of boolean type

```
HRESULT SetOverlayOptionBool(
    [in, string] LPCWSTR p_pwsOverlayId,
    [in] LONG p_nOption,
    [in] BOOL p_bValue
);
```

Parameters:

p_pwsOverlayId
[in] overlay id (obtained with AddOverlay)

p_nOption
[in] option constant

p_bValue
[in] boolean value to set

Return values:

S_OK on success or COM error code

NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_OVERLAY - wrong overlay id

NV_INVALID_OPTION - wrong option constant

NV_PROFILE_ERROR - cannot find option in profile

NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.221 SetOverlayOptionBool2

The **SetOverlayOptionBool2** method sets an overlay option of boolean type

```
HRESULT SetOverlayOptionBool2(
    [in, string] BSTR p_pwsOverlayId,
    [in] LONG      p_nOption,
    [in] BOOL      p_bValue
);
```

Parameters:

p_pwsOverlayId
[in] overlay id (obtained with AddOverlay2)
p_nOption
[in] option constant
p_bValue
[in] boolean value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.222 SetOverlayOptionEncryptedString

The **SetOverlayOptionEncryptedString** method sets an overlay option of encrypted string type

```
HRESULT SetOverlayOptionString(
    [in, string] LPCWSTR p_pwsOverlayId,
    [in] LONG      p_nOption,
    [in, string] LPCWSTR p_wsValue
);
```

Parameters:

p_pwsOverlayId
[in] overlay id (obtained with AddOverlay)
p_nOption
[in] option constant

p_wsValue
[in] string value to set (will be encrypted)

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.223 SetOverlayOptionEncryptedString2

The **SetOverlayOptionEncryptedString2** method sets an overlay option of encrypted string type

```
HRESULT SetOverlayOptionString(
    [in, string] LPWSTR p_pwsOverlayId,
    [in] LONG p_nOption,
    [in, string] LPCWSTR p_wsValue
);
```

Parameters:

p_pwsOverlayId
[in] overlay id (obtained with AddOverlay)
 p_nOption
[in] option constant
 p_wsValue
[in] string value to set (will be encrypted)

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.224 SetOverlayOptionFloat

The **SetOverlayOptionFloat** method sets an overlay option of float type

```
HRESULT SetOverlayOptionFloat(
```

```

    [in, string] LPCWSTR p_pwsOverlayId,
    [in] LONG      p_nOption,
    [in] FLOAT     p_fValue
);

```

Parameters:

p_pwsOverlayId
 [in] overlay id (obtained with AddOverlay)
 p_nOption
 [in] option constant
 p_fValue
 [in] float value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.225 SetOverlayOptionFloat2

The **SetOverlayOptionFloat2** method sets an overlay option of float type

```

HRESULT SetOverlayOptionFloat2(
    [in, string] BSTR p_pwsOverlayId,
    [in] LONG      p_nOption,
    [in] FLOAT     p_fValue
);

```

Parameters:

p_pwsOverlayId
 [in] overlay id (obtained with AddOverlay2)
 p_nOption
 [in] option constant
 p_fValue
 [in] float value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.226 SetOverlayOptionLong

The **SetOverlayOptionLong** method sets an overlay option of long type

```
HRESULT SetOverlayOptionLong(
    [in, string] LPCWSTR p_pwsOverlayId,
    [in] LONG      p_nOption,
    [in] LONG      p_lValue
);
```

Parameters:

p_pwsOverlayId
[in] overlay id (obtained with AddOverlay)
p_nOption
[in] option constant
p_lValue
[in] long value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_OVERLAY - wrong overlay id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.227 SetOverlayOptionLong2

The **SetOverlayOptionLong2** method sets an overlay option of long type

```
HRESULT SetOverlayOptionLong2(
    [in, string] BSTR p_pwsOverlayId,
    [in] LONG      p_nOption,
    [in] LONG      p_lValue
);
```

Parameters:

p_pwsOverlayId
[in] overlay id (obtained with AddOverlay)
p_nOption
[in] option constant
p_lValue

[in] long value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.228 SetOverlayOptionString

The **SetOverlayOptionString** method sets an overlay option of string type

```
HRESULT SetOverlayOptionString(
    [in, string] LPCWSTR p_pwsOverlayId,
    [in] LONG p_nOption,
    [in, string] LPCWSTR p_wsValue
);
```

Parameters:

p_pwsOverlayId
 [in] overlay id (obtained with AddOverlay)
 p_nOption
 [in] option constant
 p_wsValue
 [in] string value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.229 SetOverlayOptionString2

The **SetOverlayOptionString2** method sets an overlay option of string type

```
HRESULT SetOverlayOptionString2(
    [in, string] BSTR p_pwsOverlayId,
```

```

        [in]          LONG p_nOption,
        [in, string] BSTR p_wsValue
    );

```

Parameters:

p_pwsOverlayId
 [in] overlay id (obtained with AddOverlay2)
 p_nOption
 [in] option constant
 p_wsValue
 [in] string value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_OVERLAY - wrong overlay id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.230 SetOverrideOptionBool

The **SetOverrideOptionBool** method sets an override printing option of boolean type

```

HRESULT SetOverrideOptionBool(
    [in] LONG    p_nOption,
    [in] BOOL    p_bValue
);

```

Parameters:

p_nOption
 [in] option constant
 p_bValue
 [in] bool value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.231 SetOverrideOptionEncryptedString

The **SetOverrideOptionEncryptedString** method sets an override printing option of encrypted string type

```
HRESULT SetOverrideOptionEncryptedString(  
    [in] LONG    p_nOption,  
    [in, string] LPCWSTR p_wsValue  
);
```

Parameters:

p_nOption
[in] option constant
p_wsValue
[in] string value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.232 SetOverrideOptionEncryptedString2

The **SetOverrideOptionEncryptedString2** method sets an override printing option of encrypted string type

```
HRESULT SetOverrideOptionEncryptedString2(  
    [in] LONG    p_nOption,  
    [in, string] BSTR p_wsValue  
);
```

Parameters:

p_nOption
[in] option constant
p_wsValue
[in] string value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.233 SetOverrideOptionLong

The **SetOverrideOptionLong** method sets an override printing option of long type

```
HRESULT SetOverrideOptionLong(  
    [in] LONG    p_nOption,  
    [in] BOOL    p_bValue  
);
```

Parameters:

p_nOption
 [in] option constant
p_bValue
 [in] long integer value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.234 SetOverrideOptionString

The **SetOverrideOptionString** method sets an override printing option of string type

```
HRESULT SetOverrideOptionString(  
    [in] LONG    p_nOption,  
    [in, string] LPCWSTR p_wsValue  
);
```

Parameters:

p_nOption
 [in] option constant
p_wsValue
 [in] string value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next

files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.235 SetOverrideOptionString2

The **SetOverrideOptionString2** method sets an override printing option of string type

```
HRESULT SetOverrideOptionString2(  
    [in] LONG    p_nOption,  
    [in, string] BSTR p_wsValue  
);
```

Parameters:

p_nOption
 [in] option constant
p_wsValue
 [in] string value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_INVALID_OPTION - wrong option constant

Remarks:

You can find the complete list of override options Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

Override options are not part of the profile. These options override the options from the active profile.

1.4.11.4.236 SetPrinterActivePublicProfile

The **SetPrinterActivePublicProfile** method sets an active public profile for a printer

```
HRESULT SetPrinterActivePublicProfile(  
    [in, string] LPCWSTR p_wsPrinterName,  
    [in, string] LPCWSTR p_wsProfileId  
);
```

Parameters:

p_wsPrinterName
 [in, string] printer name
p_wsProfileId
 [in, string] public profile id

Return values:

S_OK on success or COM error code
NV_SERVICE_ERROR - error connecting to novaPDF Server service

Remarks:

Sets an public profile as the active profile for the printer. All users will be forced to use this public profile, the cannot change the active profile.

1.4.11.4.237 SetPrinterActivePublicProfile2

The **SetPrinterActivePublicProfile2** method sets an active public profile for a printer

```
HRESULT SetPrinterActivePublicProfile2(
    [in, string] BSTR p_wsPrinterName,
    [in, string] BSTR p_wsProfileId
);
```

Parameters:

```
p_wsPrinterName
    [in, string] printer name
p_wsProfileId
    [in, string] public profile id
```

Return values:

```
S_OK on success or COM error code
NV_SERVICE_ERROR - error connecting to novaPDF Server service
```

Remarks:

Sets an public profile as the active profile for the printer. All users will be forced to use this public profile, the cannot change the active profile.

1.4.11.4.238 SetPrinterOption

The **SetPrinterOption** method sets a general printer option of long int type

```
HRESULT SetPrinterOption(
    [in] LONG p_nOption,
    [in] LONG p_lValue
);
```

Parameters:

```
p_nOption
    [in] option constant
p_lValue
    [in] long integer value to set
```

Return values:

```
S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called, printer name unknown
NV_INVALID_OPTION - cannot set a general (all users) option on client computers
```

Remarks:

Sets general options that are not part of a profile (like show or not the select profile dialog. You can find the complete list of option names in the Profile option strings chapter, general settings tables. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.239 SetPrinterPublicProfile

The **SetPrinterPublicProfile** method sets the visibility of a public profile for a printer

```
HRESULT SetPrinterPublicProfile(
```

```

    [in, string] LPCWSTR p_wsPrinterName,
    [in, string] LPCWSTR p_wsProfileId,
    [in] BOOL p_bVisible
);

```

Parameters:

```

p_wsPrinterName
    [in, string] printer name
p_wsProfileId
    [in, string] public profile id
p_bVisible
    [in] flag, if visible

```

Return values:

```

S_OK on success or COM error code
NV_SERVICE_ERROR - error connecting to novaPDF Server service

```

Remarks:

Sets the visibility option for a public profile and a printer. By default, all public profiles are visible ton all printers. They can be hidden for some printers using this method.

1.4.11.4.240 SetPrinterPublicProfile2

The **SetPrinterPublicProfile2** method sets the visibility of a public profile for a printer

```

HRESULT SetPrinterPublicProfile2(
    [in, string] BSTR p_wsPrinterName,
    [in, string] BSTR p_wsProfileId,
    [in] BOOL p_bVisible
);

```

Parameters:

```

p_wsPrinterName
    [in, string] printer name
p_wsProfileId
    [in, string] public profile id
p_bVisible
    [in] flag, if visible

```

Return values:

```

S_OK on success or COM error code
NV_SERVICE_ERROR - error connecting to novaPDF Server service

```

Remarks:

Sets the visibility option for a public profile and a printer. By default, all public profiles are visible ton all printers. They can be hidden for some printers using this method.

1.4.11.4.241 SetPrinterServerFlags

The **SetPrinterServerFlags** method sets the profiles usage options for a printer

```

HRESULT SetPrinterServerFlags(
    [in, string] LPCWSTR p_wsPrinterName,

```

```
[in] BOOL p_bAllowPrivateProfiles,  
[in] BOOL p_bShowSelectProfile,  
[in] BOOL p_bAllowHideDialog  
);
```

Parameters:

```
p_wsPrinterName  
    [in, string] printer name  
p_bAllowPrivateProfiles  
    [in] allow private profiles  
p_bShowSelectProfile  
    [in] show select profiles dialog for all users  
p_bAllowHideDialog  
    [in] allow users to hide select profiles dialog
```

Return values:

```
S_OK on success or COM error code  
NV_SERVICE_ERROR - error connecting to novaPDF Server service
```

1.4.11.4.242 SetPrinterServerFlags2

The **SetPrinterServerFlags2** method sets the profiles usage options for a printer

```
HRESULT SetPrinterServerFlags2(  
    [in, string] BSTR p_wsPrinterName,  
    [in] BOOL p_bAllowPrivateProfiles,  
    [in] BOOL p_bShowSelectProfile,  
    [in] BOOL p_bAllowHideDialog  
);
```

Parameters:

```
p_wsPrinterName  
    [in, string] printer name  
p_bAllowPrivateProfiles  
    [in] allow private profiles  
p_bShowSelectProfile  
    [in] show select profiles dialog for all users  
p_bAllowHideDialog  
    [in] allow users to hide select profiles dialog
```

Return values:

```
S_OK on success or COM error code  
NV_SERVICE_ERROR - error connecting to novaPDF Server service
```

1.4.11.4.243 SetSaveRule

The **SetSaveRule** method sets values for the save rule at the given index

```
HRESULT SetSaveRule(  
    [in] LONG p_nIndex  
    [in] LONG p_nType,  
    [in, string] LPCWSTR p_wsName,  
    [in, string] LPCWSTR p_wsDescription,  
    [in, string] LPCWSTR p_wsText,  
    [in, string] LPCWSTR p_wsFormat,  
    [in] BOOL p_bEnabled  
);
```

Parameters:

p_nIndex
[in] save rule index

p_nType
[in] save rule type (0-remove from start, 1- remove from end, 2 - remove all, 3

p_wsName
[in] rule name

p_wsDescription
[in] rule description

p_wsText
[in] text to remove or regular expression

p_wsFormat
[in] format for regular expression

p_bEnabled
[in] flag, tag is enabled

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_SAVE_RULE - invalid save rule index

Remarks:

This method sets information for the save rule at given index

1.4.11.4.244 SetSaveRule2

The **SetSaveRule2** method sets values for the save rule at the given index

```
HRESULT SetSaveRule2(  
    [in] LONG p_nIndex  
    [in] LONG p_nType,  
    [in, string] BSTR p_wsName,  
    [in, string] BSTR p_wsDescription,  
    [in, string] BSTR p_wsText,  
    [in, string] BSTR p_wsFormat,  
    [in] BOOL p_bEnabled  
);
```

Parameters:

p_nIndex
 [in] save rule index
 p_nType
 [in] save rule type (0-remove from start, 1- remove from end, 2 - remove all, 3
 p_wsName
 [in] rule name
 p_wsDescription
 [in] rule description
 p_wsText
 [in] text to remove or regular expression
 p_wsFormat
 [in] format for regular expression
 p_bEnabled
 [in] flag, tag is enabled

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_SAVE_RULE - invalid save rule index

Remarks:

This method sets information for the save rule at given index

1.4.11.4.245 SetUserTag

The **SetUserTag** method changes the user tag for the given index

```

HRESULT SetUserTag(
    [in] LONG p_nIndex,
    [in, string] LPCWSTR p_wsTag,
    [in, string] LPCWSTR p_wsDefaultValue,
    [in] BOOL p_bEnabled
);
  
```

Parameters:

p_nIndex
 [in] tag index
 p_wsTag
 [in] user tag
 p_wsDefaultValue
 [in] default tag value
 p_bEnabled
 [in] flag, tag is enabled

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called

NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_USER_TAG - invalid user tag index

Remarks:

This method changes information for the tag at position given by p_nIndex

1.4.11.4.246 SetUserTag2

The **SetUserTag2** method changes the user tag for the given index

```
HRESULT SetUserTag2(  
    [in] LONG p_nIndex,  
    [in, string] BSTR p_wsTag,  
    [in, string] BSTR p_wsDefaultValue,  
    [in] BOOL p_bEnabled  
);
```

Parameters:

p_nIndex
 [in] tag index
p_wsTag
 [in] user tag
p_wsDefaultValue
 [in] default tag value
p_bEnabled
 [in] flag, tag is enabled

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_USER_TAG - invalid user tag index

Remarks:

This method changes information for the tag at position given by p_nIndex

1.4.11.4.247 SetWatermarkImageOptionBool

The **SetWatermarkImageOptionBool** method sets a watermark image option of boolean type

```
HRESULT SetWatermarkImageOptionBool(  
    [in, string] LPCWSTR p_pwsWatermarkId,  
    [in] LONG p_nOption,  
    [in] BOOL p_bValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkImage)
p_nOption
 [in] option constant

p_bValue
[in] boolean value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.248 SetWatermarkImageOptionBool2

The **SetWatermarkImageOptionBool2** method sets a watermark image option of boolean type

```
HRESULT SetWatermarkImageOptionBool2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] BOOL      p_bValue
);
```

Parameters:

p_pwsWatermarkId
[in] watermark id (obtained with AddWatermarkImage2)
 p_nOption
[in] option constant
 p_bValue
[in] boolean value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.249 SetWatermarkImageOptionEncryptedString

The **SetWatermarkImageOptionEncryptedString** method sets a watermark image option of encrypted string type

```

HRESULT SetWatermarkImageOptionEncryptedString(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [in, string] LPCWSTR p_wsValue
);

```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkImage)
 p_wsOption
 [in] option constant
 p_wsValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.250 SetWatermarkImageOptionEncryptedString2

The **SetWatermarkImageOptionEncryptedString2** method sets a watermark image option of encrypted string type

```

HRESULT SetWatermarkImageOptionEncryptedString2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [in, string] BSTR p_wsValue
);

```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkImage2)
 p_wsOption
 [in] option constant
 p_wsValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.251 SetWatermarkImageOptionFloat

The **SetWatermarkImageOptionFloat** method sets a watermark image option of float type

```
HRESULT SetWatermarkImageOptionFloat(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] FLOAT     p_fValue
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkImage)
 p_nOption
 [in] option constant
 p_fValue
 [in] float value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.252 SetWatermarkImageOptionFloat2

The **SetWatermarkImageOptionFloat2** method sets a watermark image option of float type

```
HRESULT SetWatermarkImageOptionFloat2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] FLOAT     p_fValue
);
```

Parameters:

p_pwsWatermarkId

```

[in] watermark id (obtained with AddWatermarkImage2 )
p_nOption
[in] option constant
p_fValue
[in] float value to set

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.253 SetWatermarkImageOptionLong

The **SetWatermarkImageOptionLong** method sets a watermark image option of long int type

```

HRESULT SetWatermarkImageOptionLong(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [in] LONG p_lValue
);

```

Parameters:

```

p_pwsWatermarkId
[in] watermark id (obtained with AddWatermarkImage )
p_nOption
[in] option constant
p_lValue
[in] long integer value to set

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.254 SetWatermarkImageOptionLong2

The **SetWatermarkImageOptionLong2** method sets a watermark image option of long int type

```
HRESULT SetWatermarkImageOptionLong2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] LONG      p_lValue
);
```

Parameters:

p_pwsWatermarkId
[in] watermark id (obtained with AddWatermarkImage2)
p_nOption
[in] option constant
p_lValue
[in] long integer value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_IMG - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.255 SetWatermarkImageOptionString

The **SetWatermarkImageOptionString** method sets a watermark image option of string type

```
HRESULT SetWatermarkImageOptionString(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in, string] LPCWSTR p_wsValue
);
```

Parameters:

p_pwsWatermarkId
[in] watermark id (obtained with AddWatermarkImage)
p_wsOption
[in] option constant
p_wsValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.256 SetWatermarkImageOptionString2

The **SetWatermarkImageOptionString2** method sets a watermark image option of string type

```
HRESULT SetWatermarkImageOptionString2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in, string] BSTR p_wsValue
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkImage2)
 p_wsOption
 [in] option constant
 p_wsValue
 [in] the value of the option to set.

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_IMG - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.257 SetWatermarkTextOptionBool

The **SetWatermarkTextOptionBool** method sets a watermark text option of boolean type

```
HRESULT SetWatermarkTextOptionBool(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] BOOL      p_bValue
);
```

Parameters:

p_pwsWatermarkId

```

[in] watermark id (obtained with AddWatermarkText )
p_nOption
[in] option constant
p_bValue
[in] boolean value to set

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.258 SetWatermarkTextOptionBool2

The **SetWatermarkTextOptionBool2** method sets a watermark text option of boolean type

```

HRESULT SetWatermarkTextOptionBool2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] BOOL      p_bValue
);

```

Parameters:

```

p_pwsWatermarkId
[in] watermark id (obtained with AddWatermarkText2)
p_nOption
[in] option constant
p_bValue
[in] boolean value to set

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.259 SetWatermarkTextOptionFloat

The **SetWatermarkTextOptionFloat** method sets a watermark text option of float type

```
HRESULT SetWatermarkTextOptionFloat(  
    [in, string] LPCWSTR p_pwsWatermarkId,  
    [in] LONG      p_nOption,  
    [in] FLOAT     p_fValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkText)
p_nOption
 [in] option constant
p_fValue
 [in] float value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.260 SetWatermarkTextOptionFloat2

The **SetWatermarkTextOptionFloat2** method sets a watermark text option of float type

```
HRESULT SetWatermarkTextOptionFloat2(  
    [in, string] BSTR p_pwsWatermarkId,  
    [in] LONG      p_nOption,  
    [in] FLOAT     p_fValue  
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkText2)
p_nOption
 [in] option constant
p_fValue
 [in] float value to set

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded

NV_INVALID_WATERMARK_TXT - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.261 SetWatermarkTextOptionLong

The **SetWatermarkTextOptionLong** method sets a watermark text option of long int type

```
HRESULT SetWatermarkTextOptionLong(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] LONG      p_lValue
);
```

Parameters:

p_pwsWatermarkId
 [in] watermark id (obtained with AddWatermarkText)
 p_nOption
 [in] option constant
 p_lValue
 [in] long integer value to set

Return values:

S_OK on success or COM error code
 NV_NOT_INITIALIZED - Initialize was not called
 NV_UNKNOWN_PROFILE - no profile loaded
 NV_INVALID_WATERMARK_TXT - wrong watermark id
 NV_INVALID_OPTION - wrong option constant
 NV_PROFILE_ERROR - cannot find option in profile
 NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.262 SetWatermarkTextOptionLong2

The **SetWatermarkTextOptionLong2** method sets a watermark text option of long int type

```
HRESULT SetWatermarkTextOptionLong2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG      p_nOption,
    [in] LONG      p_lValue
);
```

Parameters:

p_pwsWatermarkId

```

[in] watermark id (obtained with AddWatermarkText2 )
p_nOption
[in] option constant
p_lValue
[in] long integer value to set

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.263 SetWatermarkTextOptionString

The **SetWatermarkTextOptionString** method sets a watermark text option of string type

```

HRESULT SetWatermarkTextOptionString(
    [in, string] LPCWSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [in, string] LPCWSTR p_wsValue
);

```

Parameters:

```

p_pwsWatermarkId
[in] watermark id (obtained with AddWatermarkText )
p_wsOption
[in] option constant
p_wsValue
[in] the value of the option to set.

```

Return values:

```

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

```

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.264 SetWatermarkTextOptionString2

The **SetWatermarkTextOptionString2** method sets a watermark text option of string type

```
HRESULT SetWatermarkTextOptionString2(
    [in, string] BSTR p_pwsWatermarkId,
    [in] LONG p_nOption,
    [in, string] BSTR p_wsValue
);
```

Parameters:

p_pwsWatermarkId
[in] watermark id (obtained with AddWatermarkText2)
p_wsOption
[in] option constant
p_wsValue
[in] the value of the option to set.

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called
NV_UNKNOWN_PROFILE - no profile loaded
NV_INVALID_WATERMARK_TXT - wrong watermark id
NV_INVALID_OPTION - wrong option constant
NV_PROFILE_ERROR - cannot find option in profile
NV_WRONG_OPTION_TYPE - option is not of type long

Remarks:

You can find the complete list of option names in the Profile option strings chapter. In the Include folder of novaPDF SDK installation folder you can find the definitions for all options in the next files: novaOptions.h, novaOptions.pas, Globals.bas.

1.4.11.4.265 UnRegisterEventWindow

The **UnRegisterEventWindow** unregisters the window registered with RegisterEventWindow so it will no longer receive printing messages.

```
HRESULT UnRegisterEventWindow(void);
```

Return values:

S_OK on success or COM error code
NV_NOT_INITIALIZED - Initialize was not called

1.4.11.4.266 WaitForNovaEvent

The **WaitForNovaEvent** waits for a Windows event that will be signaled by the printer

```
HRESULT WaitForNovaEvent(
    [in] LONG p_nMilliseconds
    [out] BOOL* p_bTimeout
);
```

Parameters:

p_nMilliseconds
[in] Number of milliseconds to wait for the event. See How to use events for more information.
p_bTimeout

[out] returns TRUE if a the wait function return with a timeout, and FALSE otherwise.

Return values:

S_OK - on success

S_FALSE - event was not found

1.5 Samples

1.5.1 What sample to choose

There are several modes to start a print job to novaPDF SDK 10, and depending on your application, you should choose a different sample:

1. If you a C++ application and you create a printer job using Windows API calls like OpenPrinter, StartDoc,.... you should check the Hello World sample.
2. If you have a Delphi application and you print using the Printer object provided by Delphi, check the Hello World Delphi sample.
3. If you have a C# application that prints using the package "System.Drawing.Printing", check the Hello World CSharp sample
4. If you have a VBNet application that prints using the package "System.Drawing.Printing", check the Hello World VBNet sample
5. If you have an ASP.NET application that prints using the package "System.Drawing.Printing", check the Hello World ASPNET sample.
6. If you have a VB application and you print using the Printer object provided by VB, check the Hello World VB sample.
7. If you have an Java application that prints using the package "System.Drawing.Printing", check the Hello World Java sample.
8. If you have an Access database and you want to generate PDF files, check the PDF Reports Access sample.
9. If you perform a print job by calling other controls "Print()" method, or if you print an existing document using "ShellExecute()" function, you should check one of these samples: C++ MFC Converter, Delphi VCLConverter, CSharp Converter , VBNet Converter, VB Converter.
10. If your application runs on a network check the C++ Hello World (network) sample.
11. If you have a C++ document/view MFC architecture check the MFC Scribble sample.
12. If you want to convert MS Word documents or if you use other OLE controls to print your documents, choose one of the next samples: Word OLE CSharp, Word OLE Delphi, Word OLE VB, Word OLE VBNet or Word OLE (Java).

13. If you wish to convert Microsoft Office documents (Word, Excel, PowerPoint, Publisher or Visio), choose one of the next samples: Convert Office Docs C++, Convert Office Docs C#, Convert Office Docs VBNet, Convert Office Docs Delphi.

14. If you wish to work with temporary printers check the C++ Temporary printer sample.

15. If you wish to use novaPDF SDK in a multithreading application check the C++ Multiple printers sample.

16. If you do not wish to work with option profiles but only change a few options like pdf file name check one of next samples: Override Options C++, Override Options CSharp, Override Options Delphi, Override Options VBNet, Override Options VB

All "Hello World" samples include a separate tool file with sample functions for setting all kind of options (save options, watermarks, bookmarks, overlay, graphics, document info, security, email, links, fonts).

1.5.2 Access

1.5.2.1 PDF Reports

PDF Reports Sample is an Access database with one table and one form. On the form you can set several options for the novaPDF SDK 10 and then press a button to generate a PDF file. A report is made on the table and it is sent to novaPDF SDK 10.

It demonstrates the basic use of the INovaPDFOptions interface. The printing job is made using the object "Application.Printer"

Basically the sample creates a new profile called "Access Profile", sets the new profile as active, sets the user options from form controls, opens and prints a report, and restores original printer settings.

Source code

```
Option Compare Database
Option Explicit

Private objPDF As Object

Const strIAProfile As String = "Access Profile"
Const strPDFDriver As String = "novaPDF SDK 10"
Const bIAPublicProfile As Long = 0

Private Sub cmdCreatePDF_Click()
    On Error GoTo Error_cmdCreatePDF_Click

    Dim strActiveProfileId As String
    Dim strNewProfileId As String
    Dim strDefaultPrinter As String
```

```

' create the NovaPdfOptions object
Dim objPDF As New NovaPdfOptions90

' initialize the NovaPdfOptions object to use with a printer licensed for SDK
objPDF.Initialize2 strPDFDriver ""

' Store the Default Printer. * Note - Access cannot use the objPDF.SetDefault
' update Access internally fast enough. You must use the Application.Printer
strDefaultPrinter = Application.Printer.DeviceName

' Get the Active Profile
objPDF.GetActiveProfile2 strActiveProfileId

' Add new profile
objPDF.AddProfile2 strProfileName, bIAPublicProfile, strNewProfileId

'Load the profile
objPDF.LoadProfile2 strNewProfileId

With Me
    ! *****

    ' Set save options
    If !optSaveOptions Then
        objPDF.SetOptionLong NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_EXTENDED
    Else
        objPDF.SetOptionLong NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_NONE
    End If
    objPDF.SetOptionLong NOVAPDF_SAVE_FOLDER_TYPE, SAVEFOLDER_CUSTOM
    objPDF.SetOptionString2 NOVAPDF_SAVE_FOLDER, !txtSaveFolder
    objPDF.SetOptionString2 NOVAPDF_SAVE_FILE_NAME, !txtFilename
    objPDF.SetOptionLong NOVAPDF_SAVE_FILEEXIST_ACTION, !cbowhenFileExists

    ' After Save Action
    objPDF.SetOptionBool NOVAPDF_ACTION_DEFAULT_VIEWER, !chkOpenViewer

    ' .... other options

    'save options
    objPDF.SaveProfile

    ' Set the PDF print driver.
    objPDF.SetActiveProfile2 strNewProfileId

    ' Set the Default printer.
    Set Application.Printer = Application.Printers(strPDFDriver)

    ' Run the selected report and create a PDF file.
    DoCmd.OpenReport "rptSMZipCode"

    ' Return to previous settings

```

```

        objPDF.SetActiveProfile2 strActiveProfileId

        objPDF.DeleteProfile2 strNewProfileId

        ' Restore the Default Printer.
        Set Application.Printer = Application.Printers(strDefaultPrinter)
    End With

Exit_cmdCreatePDF_Click:
    Set objPDF = Nothing
Exit Sub
Error_cmdCreatePDF_Click:
    Debug.Print Err.Number & ":" & Err.Description
    Resume Next
End Sub

```

1.5.3 ASP.NET

1.5.3.1 Hello World

Hello World (ASP.NET) sample is a simple ASP application that generates one PDF file containing the text "novaPDF says Hello World from ASP.NET". The PDF is created using the novaPDF SDK 10 printer driver and is saved in the "upload" folder. It demonstrates the basic use of the **INovaPDFOptions** interface. The printing job is done using the package **System.Drawing.Printing**

What this sample does:

- determines the active profile, makes a copy of it and names it "Test ASP.NET"
- sets the new profile (Test ASP.NET) as active as well as some mandatory settings
- generates a test PDF file and saves it in the "upload" folder
- restores the original settings of the novaPDF SDK 10 printer driver.

Note

To test this sample on IIS, you should set the Application Pool to run under the "Local System" Account. Here's how you can do this:

1. In IIS Manager, expand **Local computer**, the **Application Pools** folder, right-click the application pool you would like to configure (the one selected for this application/ virtual directory) and click **Properties**.
2. Go to the **Identity** tab.
3. Click on **Predefined** and in the list box beside it click **Local System**. Click **OK**.

SOURCE CODE FOR THE ASP SAMPLE OUTPUT DISPLAY PAGE (DEFAULT.ASPX):

```

<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Default.aspx.cs"
Inherits="_Default" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml" >
<head id="Head1" runat="server">
    <title>Hello World ASP.NET</title>

```



```

</head>
<body>
<h1>Hello World ASP.NET and novaPDF SDK</h1>
  <form id="form2" runat="server">
    <div>
      <asp:Label ID="Label1" runat="server" Text="Press the button"></
asp:Label>
      <br />
      <asp:LinkButton ID="Link1" Visible="false" runat="server">View
folder.</asp:LinkButton>
      <br />
      <asp:Button ID="Button1" runat="server" onclick="Button1_Click"
        Text="Print to novaPDF" /><br />
      <br />
      1. In IIS Manager, expand the local computer, expand the
Application Pools folder, right-click the application pool you would like
to configure (the one selected for this application/ virtual directory),
and click Properties.
      <br />
      2. Click the Identity tab.
      <br />
      3. Click Predefined, and in the list box beside it, click Local
System.
      <br />
      4. Click OK.
    </div>
  </form>
</body>
</html>

```

SOURCE CODE FOR THE ASP SAMPLE (DEFAULT.ASPX.CS):

```

using System;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Drawing;
using System.Drawing.Printing;

// the novapiLib package must be added as a COM reference
using novapiLib;
using System.Diagnostics;

public partial class _Default : System.Web.UI.Page
{
    protected void Button1_Click(object sender, EventArgs e)
    {
        try
        {
            // create the NovaPdfOptions object
            NovaPdfOptions90 pNova = new NovaPdfOptions90();
            // initialize the NovaPdfOptions object
            pNova.InitializeSilent(PRINTER_NAME, "");

```

```

        // get the active profile ...
        string activeProfile = null;
        string newProfileId = null;
        pNova.GetActiveProfile(out activeProfile);
        //create new profile
        pNova.AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC, out
newProfileId)
        pNova.LoadProfile(newProfileId);

        // and set some options
        pNova.SetOptionString2(NovaOptions.NOVPDF_DOCINFO_SUBJECT,
"ASP.NET Hello document");
        pNova.SetOptionString(NovaOptions.NOVPDF_SAVE_FILE_NAME,
"novaPDFDocument");
        pNova.SetOptionLong(NovaOptions.NOVPDF_SAVE_FOLDER_TYPE, (int
)SaveFolder.SAVEFOLDER_CUSTOM);
        pNova.SetOptionString(NovaOptions.NOVPDF_SAVE_FOLDER,
Server.MapPath("upload/"));
        pNova.SetOptionLong(NovaOptions.NOVPDF_SAVE_FILEEXIST_ACTION, (
int)SaveFileConflictType.FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW);
        pNova.SetOptionBool(NovaOptions.NOVPDF_INFO_VIEWER_ENABLE, 1);
        pNova.SetOptionLong(NovaOptions.NOVPDF_SAVE_PROMPT_TYPE, (int
)SaveDlgType.PROMPT_SAVE_SIMPLE);

        //save the new added profile
        pNova.SaveProfile();
        //set the new profile as the active profile
        pNova.SetActiveProfile(newProfileId);

        // print a test page, using the previously set active
profile settings
        using (PrintDocument pd = new PrintDocument())
        {
            pd.PrintController = new StandardPrintController();
            pd.PrinterSettings.PrinterName = PRINTER_NAME;
            pd.PrintPage += new
PrintPageEventHandler(PrintPageFunction);
            pd.Print();
        }
        if ((activeProfile.Length > 0) &&
(activeProfile.CompareTo(PROFILE_NAME) != 0))
        {
            pNova.SetActiveProfile(activeProfile);
        }
        pNova.DeleteProfile(newProfileId);
        // mark finish changing options so they are saved for the printer

        Label1.Text = "Success.<br />You will find the new printed file
in \"upload\" folder.";
        Button1.Visible = false;

        Link1.Visible = true;
        Link1.Attributes.Add("href", "upload/");
        Link1.Attributes.Add("target", "_blank");
    }
    catch (System.Runtime.InteropServices.COMException come)

```

```

        {
            Label1.Style.Add("color", "red");
            Label1.Text = "COM Exception:" + come.Message;
        }
        catch (Exception ee)
        {
            Label1.Style.Add("color", "red");
            Label1.Text = "Exception: " + ee.Message;
            return;
        }
    }
    // and finally the function that actually prints the page
    private static void PrintPageFunction(object sender,
    PrintPageEventArgs ev)
    {
        string str = "novaPDF says Hello World from    ASP.NET";
        Font font = new Font("Arial", 16);
        Brush brush = new SolidBrush(Color.Black);
        ev.Graphics.DrawString(str, font, brush, 20.0f, 20.0f);
        ev.HasMorePages = false;
    }
}

```

1.5.4 Delphi

1.5.4.1 VCL Converter

The **VCL Converter** sample demonstrates how to convert an existing file by printing it to novaPDF SDK10 using the ShellExecute function. It also demonstrates how to set different options and manage profiles.

The same approach should be taken if you print using a "Print()" method from another object (like an internet browser or a report control). Just replace the ShellExecute call with the call of your Print method.

When the application starts, it creates a few profiles and makes different settings in the profiles. Then it shows a dialog from where the user can select the active profile and change its settings using the controls from the dialog.

After that a document can be selected from the harddisk and printed to novaPDF SDK 10 using the ShellExecute function call.

When using this technique to convert a file to PDF, you have to take care of the fact that ShellExecute prints to the default printer. This function returns immediately and does not wait until the print is finished (it may return before the printing is actually started). Therefore you have to set the default printer to novaPDF SDK 10 before calling ShellExecute (using the SetDefaultPrinter method), register FileSaved message (or any other novaPDF SDK 10 message) to be sure that the print job was started. In this message handler restore the default printer (with the RestoreDefaultPrinter method). This way you made sure that the default printer was restored and your document is printed to novaPDF SDK 10.

Source code snippets

1. DECLARE INovaPdfOptions variable

```
//declare an INovaPdfOptions member variable
PRIVATE
    m_novaOptions : INovaPdfOptions;
```

2. Register novaPDF SDK 10 messages

```
// register event messages
WM_NOVAPDF2_FILESAVED := RegisterWindowMessage(MSG_NOVAPDF2_FILESAVED);
WM_NOVAPDF2_PRINTERROR := RegisterWindowMessage(MSG_NOVAPDF2_PRINTERROR);

// handle event messages
PUBLIC
    PROCEDURE WndProc(var Message: TMessage); override;
    PROCEDURE TForm1.WndProc(var Message: TMessage);
    BEGIN
        IF Message.Msg = WM_NOVAPDF2_FILESAVED then BEGIN
            // ...
        END ELSE IF Message.Msg = WM_NOVAPDF2_PRINTERROR then BEGIN
            // ...
        END ELSE BEGIN
            inherited WndProc(Message);
        END;
    END;
```

3. Initialize INovaPdfOptions

```
PROCEDURE TForm1.FormCreate(Sender: TObject);
BEGIN
    // ...

    // initialize COM libraries
    hr := ActiveX.CoInitialize(nil);
    if FAILED(hr) then begin
        MessageDlg('Failed to initialize COM' + #13+SysErrorMessage(hr) + #13+
            SysErrorMessage(GetLastError()), mtWarning, [mbOK], 0);
    end;

    //create an instance of INovaPdfOptions
    m_novaOptions := nil;
    hr := ActiveX.CoCreateInstance(CLASS_NovaPdfOptions9,
        //CLSID_CNovaPdfSource,
        nil,
        CLSCTX_INPROC_SERVER,
        IID_INovaPdfOptions9,
        m_novaOptions);

    if (FAILED(hr)) then begin
        MessageDlg('Failed to create novaPDF COM object', mtWarning, [mbOK], 0);
    end;
    exit;
end;
```

```
// initialize the NovaPdfOptions object to use with a printer licensed
for SDK
m_novaOptions.Initialize( PRINTER_NAME, '' );
if (FAILED(hr)) then begin
    MessageDlg('Failed to initialize NovaPdfOptions', mtWarning, [mbOK], 0
);
    exit;
end;

// add 2 profiles
CreateProfiles();

// load profiles in list
LoadProfiles();
END;
```

4. Release INovaPDFOptions

```
PROCEDURE TForm1.FormClose(Sender: TObject; var Action: TCloseAction);
BEGIN
    //...
    //delete profiles
    m_novaOptions.DeleteProfile2( m_strSmallSizeProfileID );
    m_novaOptions.DeleteProfile2( m_strFullOptProfileID );

    // destroy m_novaOptions object
    // - no need for this as the Delphi takes care of it automatically

    // uninitialized COM libraries
    ActiveX.CoUninitialize();
    //...
END;
```

5. Set novaPDF SDK 10 Options

```
PROCEDURE TForm1.CreateProfiles();
BEGIN
    // Add a profile called "Small size"
    m_novaOptions.AddProfile2(SMALL_SIZE_PROFILE, PROFILE_IS_PUBLIC,
m_strSmallSizeProfileID);
    m_novaOptions.LoadProfile2(m_strSmallSizeProfileID);

    // Set some options to this profile

    // disable the "Save PDF file as" prompt
    m_novaOptions.SetOptionLong(NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_NONE
);
    // set generated Pdf files destination folder to the application path
    m_novaOptions.SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE, SAVEFOLDER_CUSTOM
);
    m_novaOptions.SetOptionString2(NOVAPDF_SAVE_FOLDER,
ExtractFilePath(Application.ExeName
));
    // set output file name
```

```
m_novaOptions.SetOptionString2(NOVAPDF_SAVE_FILE_NAME, 'PDF Converter
small size.pdf');
```

```
//Set other options and profiles
//...
```

```
END;
```

6. Start a print job

```
PROCEDURE TForm1.btnStartPrintClick(Sender: TObject);
```

```
var
```

```
    hExec : HINST;
```

```
BEGIN
```

```
    //...
```

```
    // set the active profile to be used for printing
    m_novaOptions.SetActiveProfile2(strProfileId);
```

```
    // register our window to receive messages from the printer
    m_novaOptions.RegisterEventWindow(self.Handle);
```

```
    // set novaPDF as default printer, so it will be used by ShellExecute
    m_novaOptions.SetDefaultPrinter();
```

```
    // license the file to be converted with ShellExecute
    m_novaOptions.LicenseShellExecuteFile(efFileToConvert.Text);
```

```
    // print the document
    m_bPrintJobPending := TRUE;
```

```
    hExec := ShellAPI.ShellExecute(self.handle, 'print', PChar(
efFileToConvert.Text),
                                PChar(''), PChar(''), SW_HIDE);
```

```
    if (hExec <= 32) then begin // failed to execute program
```

```
        m_bPrintJobPending := FALSE;
```

```
        m_novaOptions.UnRegisterEventWindow();
```

```
        m_novaOptions.RestoreDefaultPrinter();
```

```
    end;
```

```
END;
```

7. Restore default printer when printing finished

```
PROCEDURE TForm1.WndProc(var Message: TMessage);
```

```
BEGIN
```

```
    if Message.Msg = WM_NOVAPDF2_FILESAVED then begin
```

```
        // restore original default printer
```

```
        m_novaOptions.UnRegisterEventWindow();
```

```
        m_novaOptions.RestoreDefaultPrinter();
```

```
        m_bPrintJobPending := FALSE;
```

```

end else if Message.Msg = WM_NOVAPDF2_PRINTERROR then begin

    case (Message.WParam) of
        ERROR_MSG_TEMP_FILE : begin
            MessageDlg('Error saving temporary file on printer server',
mtWarning, [mbOK], 0);
        end;
        ERROR_MSG_LIC_INFO : begin
            MessageDlg('Error reading license information', mtWarning, [mbOK],
0);
        end;
        ERROR_MSG_SAVE_PDF : begin
            MessageDlg('Error saving PDF file', mtWarning, [mbOK], 0);
        end;
        ERROR_MSG_JOB_CANCELED : begin
            MessageDlg('Print job was canceled', mtWarning, [mbOK], 0);
        end;
    end;
    // restore original default printer
    m_novaOptions.UnRegisterEventWindow();
    m_novaOptions.RestoreDefaultPrinter();
    m_bPrintJobPending := FALSE;

end else begin

    inherited WndProc(Message);

end;
END;

```

1.5.4.2 Hello World Delphi

Hello **World Delphi** sample is a simple Windows console application that prints one page with the "Hello World from Delphi!" text to the novaPDF SDK 10.

It demonstrates the basic use of the INovaPDFOptions interface. The printing job is made with calls to the global Printer object defined by Delphi. Text is printed using Canvas.TextOut method.

It generates a "Hello World.pdf" file in the working folder.

Notice

If you print an existing document using "ShellExecute()" function or you want to handle printing events, you should check the VCL Converter sample instead.

Source code

```

program HelloWorld;

{$APPTYPE CONSOLE}

uses
    ActiveX,

```

```

Printers,
Windows,
novaOptions in '..\..\..\include\novaOptions.pas',
novapiLIB80_TLB in '..\..\..\include\novapiLIB9_TLB.pas',
Nova in 'Nova.pas';

```

const

```

//name of novaPDF Printer
PRINTER_NAME = 'novaPDF SDK 9';

//text to be written in the PDF file
PDF_TEXT = 'Hello world from Delphi!';

//PDF file name
PDF_FILE_NAME = 'HelloWorld_Delphi';

//Print profile name
PROFILE_NAME = 'HelloWorld Delphi Profile';
PROFILE_IS_PUBLIC = 0;

```

var

```

hr : HRESULT;
pNova : INovaPdfOptions9;
strOldActiveProfileID : WideString;
strNewProfileID : WideString;
//decomment next code if you use workaround for printer index (see below)
//Device, Driver, Port: array[0..80] of Char;
//DevMode: THandle;

```

begin

```

//initialize COM
hr := ActiveX.CoInitialize(nil);
if (FAILED (hr)) then begin
    System.WriteLine('Failed to initialize COM');
    exit;
end;

//create one NovaPdfOptions instance
pNova := nil;
hr := ActiveX.CoCreateInstance(CLASS_NovaPdfOptions9,
//CLSID_CNovaPdfSource,
                                nil,
                                CLSCTX_INPROC_SERVER,
                                IID_INovaPdfOptions9,
                                pNova);
if (FAILED(hr)) then begin
    System.WriteLine('Failed to create novaPDF COM object');
    exit;
end;

    // initialize the NovaPdfOptions object to use with a printer
    licensed for SDK

```



```
pNova.Initialize2( PRINTER_NAME, '' );

pNova.SetDefaultPrinter();

// now the default printer is novaPDF printer but the Printer object is
not updated
// here is a workaround to update the Printer object with the default
printer
// you only need this code if you check later on the Printer.PrinterIndex
to find out the default printer
//Printer.GetPrinter(Device, Driver, Port, DevMode);
//Printer.SetPrinter(PRINTER_NAME, Driver, Port, 0);

//create a new profile with default settings
pNova.AddProfile2(PROFILE_NAME, PROFILE_IS_PUBLIC, strNewProfileID);

//load the newly created profile
if SUCCEEDED(hr) and (Length(strNewProfileID) > 0) then begin
    pNova.LoadProfile2(strNewProfileID);
end else begin
    System.WriteLine('Failed to create profile');
    exit;
end;

// set novaPDF options
// uncomment the function calls for the options you wish to set and
change the options in nova.cpp unit
//AddProfileOptions(pNova);
//AddDocumentInformation(pNova);
//AddViewerOptions(pNova);
//AddLinksOptions(pNova);
//AddAdvancedOptions(pNova);
//AddGraphicsOptions(pNova);
//AddEmbedFontsOptions(pNova);
//AddBookmarksDefinitions(pNova);
//AddSecurity(pNova);
//AddSaveOptions(pNova);
//AddAfterSaveActions(pNova);
//AddEmailOptions(pNova);
//AddWatermarkImage(pNova);
//AddWatermarkText(pNova);
//AddPageContentOptions(pNova);
//AddOverlayOptions(pNova);
//AddSignatureOptions(pNova);

//save profile changes
pNova.SaveProfile();

//get current default profile id
pNova.GetActiveProfile2(strOldActiveProfileID);
//set as active profile for printer
pNova.SetActiveProfile2(strNewProfileID);
```

```

//start print job
Printer.Title := PDF_FILE_NAME;
Printer.BeginDoc();
Printer.Canvas.Font.Size := 24;
Printer.Canvas.TextOut( 100, 80, PDF_TEXT);
Printer.endDoc();
System.WriteLine('Print job finished');

//restore default profile
pNova.SetActiveProfile2(strOldActiveProfileID);
pNova.DeleteProfile2(strNewProfileID);
//resore default printer
pNova.RestoreDefaultPrinter();

//release NovaPdfOptions
// pNova._Release();

ActiveX.CoUninitialize();

```

end.

1.5.4.3 Convert Office Docs

The **Convert Office Docs** sample is a simple Windows console application that converts some Microsoft Office documents (Word, Excel, Publisher, PowerPoint and Visio) using Convert... functions. It uses Office OLE automation so Microsoft Office has to be installed.

The sample documents converted are located in the "OfficeDocuments" folder in novaPDF SDK installation folder. The pdf files are saved in the same folder.

Hidden links and internal document links are converted in pdf hyperlinks (except for Excel documents).

Source code

program ConvertOfficeDocs;

{ \$APPTYPE CONSOLE }

uses

```

ActiveX,
Printers,
Windows,
sysutils,
novaOptions in '..\..\..\include\novaOptions.pas',
novaEvents in '..\..\..\include\novaEvents.pas',
novapiLIB10_TLB in '..\..\..\include\novapiLIB9_TLB.pas',
program ConvertOfficeDocs;

```

const

```

//name of novaPDF Printer
PRINTER_NAME = 'novaPDF SDK 9';

```

```
//PDF file name
PDF_FILE_NAME = 'ConvertOffice_Delphi';

//Print profile name
PROFILE_NAME = 'Convert Office Delphi';
PROFILE_IS_PUBLIC = 0;

var
  hr : HRESULT;
  pNova : INovaPdfOptions10;
  strOldActiveProfileID : WideString;
  strNewProfileID : WideString;
  bTimeout : Integer;
  strDocumentsPath : WideString;
  strDocPath : WideString;
  strHeadings : WideString;

begin

  //initialize COM
  hr := ActiveX.CoInitialize(nil);
  if (FAILED(hr)) then begin
    System.WriteLine('Failed to initialize COM');
    exit;
  end;

  //create one NovaPdfOptions instance
  pNova := nil;
  hr := ActiveX.CoCreateInstance(CLASS_NovaPdfOptions9,
                                nil,
                                CLSCTX_INPROC_SERVER,
                                IID_INovaPdfOptions9,
                                pNova);
  if (FAILED(hr)) then begin
    System.WriteLine('Failed to create novaPDF COM object');
    exit;
  end;

  // initialize the NovaPdfOptions object to use with a printer licensed for SDK
  // if you have an application license for novaPDF SDK,
  // pass the license key to the Initialize() function
  pNova.Initialize2( PRINTER_NAME, '');

  //create a new profile with default settings
  pNova.AddProfile2(PROFILE_NAME, PROFILE_IS_PUBLIC, strNewProfileID);

  //load the newly created profile
  if SUCCEEDED(hr) and (Length(strNewProfileID) > 0) then begin
    pNova.LoadProfile2(strNewProfileID);
  end else begin
    System.WriteLine('Failed to create profile');
```

```

        exit;
    end;

    //DO NOT OPEN PDF
    //an Open action is added by default in the profile - delete or disable this op
    //pNova.DisableActionType(NOVA_ACTION_OPEN);

    // set novaPDF save options
    AddSaveOptions(pNova);

    //save profile changes
    pNova.SaveProfile();

    try
        //get current default profile id
        pNova.GetActiveProfile2(strOldActiveProfileID);
    except
        strOldActiveProfileID := '';
    end;
    //set as active profile for printer
    pNova.SetActiveProfile2(strNewProfileID);

    //Path for novaPDF 10 SDK sample documents
    strDocumentsPath := GetEnvironmentVariable('ALLUSERSPROFILE');
    strDocumentsPath := strDocumentsPath + '\Documents\novaPDF 10\SDK\OfficeDocumen

    // -----
    // Convert Word document
    // Microsoft Office Word has to be installed
    // -----
    //Document file path
    strDocPath := strDocumentsPath;
    strDocPath := strDocPath + 'Word.docx';
    //style name | level | type
    strHeadings := 'Heading 1|1|0;Heading 2|2|0;Heading 3|3|0';
    pNova.LicenseApplication('WINWORD.EXE');
    pNova.LicenseApplication('SPLWOW64.EXE');
    pNova.ConvertWordDocument2(strDocPath, 1, 0, 1, 1, 1, 1, 1, 1, 1, 3, strHeadings);

    // -----
    // Convert PowerPoint document
    // Microsoft Office PowerPoint has to be installed
    // -----
    //Document file path
    strDocPath := strDocumentsPath;
    strDocPath := strDocPath + 'PowerPoint.pptx';
    pNova.LicenseApplication('POWERPNT.EXE');
    pNova.LicenseApplication('SPLWOW64.EXE');
    pNova.ConvertPowerPointDocument2(strDocPath, 1, 1, 1, 1, 1, 1);

    // -----
    // Convert Publisher document

```

```

// Microsoft Office Publisher has to be installed
// -----
//Document file path
strDocPath := strDocumentsPath;
strDocPath := strDocPath + 'Publisher.pub';
pNova.LicenseApplication('MSPUB.EXE');
pNova.LicenseApplication('SPLWOW64.EXE');
pNova.ConvertPublisherDocument2(strDocPath, 1, 1, 1, 1, 1, 1);

// -----
// Convert Excel document
// Microsoft Office Excel has to be installed
// hidden links in Excel documents will not be converted to pdf links
// -----
//Document file path
strDocPath := strDocumentsPath;
strDocPath := strDocPath + 'Excel.xlsx';
pNova.LicenseApplication('EXCEL.EXE');
pNova.LicenseApplication('SPLWOW64.EXE');
pNova.ConvertExcelDocument2(strDocPath, 1);

// -----
// Convert Visio document
// Microsoft Office Visio has to be installed
// -----
//Document file path
strDocPath := strDocumentsPath;
strDocPath := strDocPath + 'Visio.vsd';
pNova.LicenseApplication('VISIO.EXE');
pNova.LicenseApplication('SPLWOW64.EXE');
pNova.ConvertVisioDocument2(strDocPath, 1, 1, 1, 1, 1);

if Length(strOldActiveProfileID) > 0 then begin
    //restore default profile
    pNova.SetActiveProfile2(strOldActiveProfileID);
end;

pNova.DeleteProfile2(strNewProfileID);

ActiveX.CoUninitialize();
end.

```

1.5.4.4 Word OLE Delphi

The **Word OLE Delphi** sample is a simple Windows console application that converts a MS Word document (C:\Test.doc) to PDF using Word OLE automation.

Source code

```

program WordOLEDelphi;

{$APPTYPE CONSOLE}

```

uses

```

ActiveX,
Printers,
ComObj,
SysUtils,
Dialogs,
novaOptions in '..\..\..\include\novaOptions.pas',
novapiLIB80_TLB in '..\..\..\include\novapiLIB9_TLB.pas';

```

const

```

//name of novaPDF Printer
PRINTER_NAME      = 'novaPDF SDK 9';

//Print profile name
PROFILE_NAME       = 'Test OLE Delphi Profile';
PROFILE_IS_PUBLIC  = 0;

```

var

```

hr : HRESULT;
pNova : INovaPdfOptions9;
strOldActiveProfileID : WideString;
strNewProfileID : WideString;
Word : VARIANT;
NewDoc : VARIANT;

```

begin

```

//initialize COM
hr := ActiveX.CoInitialize(nil);
if (FAILED (hr)) then begin
    System.WriteLine('Failed to initialize COM');
    exit;
end;

//create one NovaPdfOptions instance
pNova := nil;
hr := ActiveX.CoCreateInstance(CLASS_NovaPdfOptions9,
//CLSID_CNovaPdfSource,
                                nil,
                                CLSCTX_INPROC_SERVER,
                                IID_INovaPdfOptions9,
                                pNova);
if (FAILED(hr)) then begin
    System.WriteLine('Failed to create novaPDF COM object');
    exit;
end;

//initialize NovaPdfOptions and pass printer name
pNova.Initialize2( PRINTER_NAME, '' );

pNova.SetDefaultPrinter();

```

```
// now the default printer is novaPDF printer but the Printer object is
not updated
// here is a workaround to update the Printer object with the default
printer
// you only need this code if you check later on the Printer.PrinterIndex
to find out the default printer
//Printer.GetPrinter(Device, Driver, Port, DevMode);
//Printer.SetPrinter(PRINTER_NAME, Driver, Port, 0);

//create a new profile with default settings
pNova.AddProfile2(PROFILE_NAME, PROFILE_IS_PUBLIC, strNewProfileID);

//load the newly created profile
if (Length(strNewProfileID) > 0) then begin
    pNova.LoadProfile2(strNewProfileID);
end else begin
    System.WriteLine('Failed to create profile');
    exit;
end;

// set PDF document Title
pNova.SetOptionString2( NOVAPDF_DOCINFO_TITLE, 'Hello World Delphi
Sample');
// set resulting file name
pNova.SetOptionString2(NOVAPDF_SAVE_FOLDER, 'C:\');
//do not show prompt dialog
pNova.SetOptionLong(NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_NONE);
//if file exists, override
pNova.SetOptionLong(NOVAPDF_SAVE_FILEEXIST_ACTION,
FILE_CONFLICT_STRATEGY_OVERWRITE);
//do not open document in PDF viewer
pNova.SetOptionBool(NOVAPDF_ACTION_DEFAULT_VIEWER, 1);

//save profile changes
pNova.SaveProfile();

//get current default profile id
pNova.GetActiveProfile2(strOldActiveProfileID);
//set as active profile for printer
pNova.SetActiveProfile2(strNewProfileID);

//Print Word Document
try
    pNova.InitializeOLEUsage('Word.Application');
    Word := CreateOleObject('Word.Application');
    Word.DisplayAlerts := 0;
    pNova.LicenseOLEServer();
    NewDoc:= Word.Documents.Open('C:\temp\Test.doc', False, True);
    NewDoc.PrintOut(False);
    NewDoc.Close(False);
    Word.Quit(False);
except
    on E: Exception do
```

```

        ShowMessage(E.Message);
    end;

    //restore default profile
    pNova.SetActiveProfile2(strOldActiveProfileID);
    pNova.DeleteProfile2(strNewProfileID);
    //resore default printer
    pNova.RestoreDefaultPrinter();

    //release NovaPdfOptions
    //pNova._Release();

    ActiveX.CoUninitialize();

end.

```

1.5.4.5 Override Options

Override Options sample is a simple Windows console application that demonstrates the basic use of the INovaPDFOptions interface, without using profiles options. Instead of creating a profile and setting options in the profile, the sample uses SetOverrideOptions... functions to quickly set some options that will overwrite active profile settings. This is useful if you have a simple application where you just wish to change the pdf file name, email address or other simple options for each printed document.

There is a limited set of options that can be set with SetOverrideOptions... functions, usually settings that users can also change from the Save As dialog or the other prompt dialogs that can be shown before printing a document. If you need more complex settings, like adding a watermark, overlay or signature you have to configure them in a profile.

You can combine usage of profiles and override options functions. For instance you can create a profile with a watermark that is set as active and then use the override function just to change the file name for each document.

Once set, override options are taken in account for all printed documents until they are removed with DeleteOverrideOptions function.

The sample prints one page with a simple text to the novaPDF SDK 10 and generates a "OverrideOptions.pdf" file in the C:\temp folder.

Source code

```

program OverrideOptions;

{$APPTYPE  CONSOLE}

uses
    ActiveX,
    Printers,
    Windows,
    novaOptions in '..\..\..\include\novaOptions.pas',

```



```
novaEvents in '..\..\..\include\novaEvents.pas',
novapiLIB10_TLB in '..\..\..\include\novapiLIB9_TLB.pas';

const

    //name of novaPDF Printer
    PRINTER_NAME      = 'novaPDF SDK 9';

    //text to be written in the PDF file
    PDF_TEXT          = 'Hello world from Delphi!';

    //PDF file name
    PDF_FILE_NAME     = 'HelloWorld_Delphi';

var
    hr : HRESULT;
    pNova : INovaPdfOptions9;
    bTimeout : Integer;
    //decomment next code if you use workaround for printer index (see below)
    //Device, Driver, Port: array[0..80] of Char;
    //DevMode: THandle;
begin

    //initialize COM
    hr := ActiveX.CoInitialize(nil);
    if (FAILED (hr) then begin
        System.WriteLine('Failed to initialize COM');
        exit;
    end;

    //create one NovaPdfOptions instance
    pNova := nil;
    hr := ActiveX.CoCreateInstance(CLASS_NovaPdfOptions9, //CLSID_CNovaPdfSource,
                                nil,
                                CLSCTX_INPROC_SERVER,
                                IID_INovaPdfOptions9,
                                pNova);

    if (FAILED(hr)) then begin
        System.WriteLine('Failed to create novaPDF COM object');
        exit;
    end;

    // initialize the NovaPdfOptions object to use with a printer licensed for SDK
    // if you have an application license for novaPDF SDK,
    // pass the license key to the Initialize() function
    pNova.Initialize2(PRINTER_NAME, '');

    pNova.SetDefaultPrinter();

    // now the default printer is novaPDF printer but the Printer object is not updated
    // here is a workaround to update the Printer object with the default printer
    // you only need this code if you check later on the Printer.PrinterIndex to find
    out the default printer
    //Printer.GetPrinter(Device, Driver, Port, DevMode);
    //Printer.SetPrinter(PRINTER_NAME, Driver, Port, 0);
```

```
//Override options from active profile

//Save options
//do not show prompt save dialog
pNova.SetOverrideOptionLong(NOVAPDF_OVERRIDE_SAVE_TYPE, PROMPT_SAVE_NONE);
//save the pdf in next folder
pNova.SetOverrideOptionLong(NOVAPDF_OVERRIDE_SAVE_FOLDER_TYPE, SAVEFOLDER_CUSTOM);
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_SAVE_FOLDER, 'C:\temp');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_SAVE_FILE, PDF_FILE_NAME);
//access folder, if restricted
pNova.SetOverrideOptionEncryptedString2(NOVAPDF_OVERRIDE_SAVE_USER, 'user');
pNova.SetOverrideOptionEncryptedString2(NOVAPDF_OVERRIDE_SAVE_PASSWORD, 'password'
);
//if a file with the same name already exists
pNova.SetOverrideOptionLong(NOVAPDF_OVERRIDE_SAVE_CONFLICT,
FILE_CONFLICT_STRATEGY_OVERWRITE);

//disable open PDF in viewer
//pNova.SetOverrideOptionBool(NOVAPDF_OVERRIDE_OPEN_VIEWER, 0);

//Embed fonts
pNova.SetOverrideOptionBool(NOVAPDF_OVERRIDE_EMBEDFONTS, 1);

//Set compression level
//pNova.SetOverrideOptionLong(NOVAPDF_OVERRIDE_COMPRESSION,
COMPRESSION_HIGHQUALITY);

//Merge PDF
//Enable merge
{
    pNova.SetOverrideOptionBool(NOVAPDF_OVERRIDE_MERGE_PDF, 1);
    //Merge with the same file, if the file exists in destination OR merge with another
    file
    pNova.SetOverrideOptionLong(NOVAPDF_OVERRIDE_MERGE_FILE_TYPE, MERGE_FILE_OTHER);
    //Append to existing PDF, insert at the beginning or insert at a page number
    pNova.SetOverrideOptionLong(NOVAPDF_OVERRIDE_MERGE_TYPE, MERGE_TYPE_APPEND);
    //if merge with other file, specify file name (and path)
    pNova.SetOverrideOptionString(NOVAPDF_OVERRIDE_MERGE_FILE, 'invoice-text.pdf');
    //if merge type is set to insert at page number
    //pNova.SetOverrideOptionLong(NOVAPDF_OVERRIDE_INSERT_PAGENO, 1);
    //if the existing PDF is encrypted
    //pNova.SetOverrideOptionEncryptedString2(NOVAPDF_OVERRIDE_PDF_PASSWORD,
    'password');
}
//Document info
pNova.SetOverrideOptionBool(NOVAPDF_OVERRIDE_DOC_INFO, 1);
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_DOC_TITLE, 'sdk title');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_DOC_SUBJECT, 'sdk subject');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_DOC_AUTHOR, 'sdk author');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_DOC_KEY, 'sdk key');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_DOC_CREATOR, 'sdk creator');

//Encrypt PDF
{
```

```

pNova.SetOverrideOptionBool(NOVAPDF_OVERRIDE_SECURITY, 1);
pNova.SetOverrideOptionEncryptedString2(NOVAPDF_OVERRIDE_SECURITY_U, 'user');
pNova.SetOverrideOptionEncryptedString2(NOVAPDF_OVERRIDE_SECURITY_O, 'owner');
}
//Email
pNova.SetOverrideOptionBool(NOVAPDF_OVERRIDE_SEND_EMAIL, 1);
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_REC_TO, 'to');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_REC_FROM, 'from');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_REC_CC, 'cc');
pNova.SetOverrideOptionString2(NOVAPDF_OVERRIDE_REC_BCC, 'bcc');

pNova.RegisterNovaEvent2(NOVAPDF_EVENT_ACTIONS);
//start print job
Printer.Title := PDF_FILE_NAME;
Printer.BeginDoc();
Printer.Canvas.Font.Size := 24;
Printer.Canvas.TextOut( 100, 80, PDF_TEXT);
Printer.endDoc();
System.WriteLine('Print job finished');

pNova.WaitForNovaEvent(120000, bTimeout);

//resore default printer
pNova.RestoreDefaultPrinter();

//release NovaPdfOptions
// pNova._Release();

ActiveX.CoUninitialize();

end.

```

1.5.5 C#

1.5.5.1 Hello World CSharp

Hello World CSharp sample is a simple Windows console application that prints one page with the "novaPDF says Hello World from C#" text to the novaPDF SDK 10.

It demonstrates the basic use of the INovaPDFOptions interface. The printing job is made using the package "System.Drawing.Printing"

Basically the sample determines the active profile, makes a copy of it into a profile called "Test C#", sets the new profile as active, sets the subject of the generated PDF document, prints a page, and restores original printer settings. The location of the generated document depends on whatever the settings are for the current active profile.

Notice

Because of the specific exception based error handling in .NET, all calls to methods in the INovaPDFOptions interface must be nested within a try-catch block. Consider for example that we want to add a profile called "test", but the profile "test" already exists. Then the call `pNova.AddProfile("test")` will throw an "System.Runtime.InteropServices.COMException". with the

ErrorCode property set to NV_PROFILE_EXISTS (0xD5DA0006).

Source code

```
using System;
using System.Drawing;
using System.Drawing.Printing;
using System.Windows.Forms;
// the novapiLib package must be added as a COM reference
using novapiLib9;
using Globals;

namespace Hello_World_CSharp
{
    /// <summary>
    /// Summary description for Class1.
    /// </summary>
    class Class1
    {
        /// <summary>
        /// The main entry point for the application.
        /// </summary>
        public static string PRINTER_NAME = "novaPDF SDK 9";
        public static string PROFILE_NAME = "HelloWorld";
        public static int PROFILE_IS_PUBLIC = 0;

        public static string PDF_TEXT = "Hello World";
        public static string PDF_FILE_NAME = "HelloWorld.pdf";

        [STAThread]
        static void Main(string[] args)
        {
            try
            {
                // create the NovaPdfOptions object
                NovaPdfOptions9 pNova = new NovaPdfOptions9();
                // initialize the NovaPdfOptions object
                pNova.Initialize(PRINTER_NAME, "");

                // get the active profile ...
                string activeProfile = null;
                bool isActiveProfile = true;
                //pNova.GetActiveProfile(out activeProfile, out
nActivePublic);
                try
                {
                    pNova.GetActiveProfile(out activeProfile);
                }
                catch (System.Runtime.InteropServices.COMException e)
                {
                    isActiveProfile = false;
                    // ignore profile exists error
                }
            }
        }
    }
}
```

```

        if (NovaErrors.NV_NO_ACTIVE_PROFILE == (uint
)e.ErrorCode)
        {
            System.Console.WriteLine("The printer does not have
an active profile");
        }
        else
        {
            // more serious error, propagate it
            throw e;
        }
    }

    string _newProfileID = String.Empty;
    //add a new profile
    pNova.AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC, out
_newProfileID);

    //load the new profile
    pNova.LoadProfile(_newProfileID);
    //nova.NovaTools.AddProfileOptions(pNova);

    // and set some options
    // uncomment the function calls for the options you wish to
set

    // change the options in the nova.cs unit
    //nova.NovaTools.AddProfileOptions(pNova);
    //nova.NovaTools.AddDocumentInformation(pNova);
    //nova.NovaTools.AddViewerOptions(pNova);
    //nova.NovaTools.AddLinksOptions(pNova);
    //nova.NovaTools.AddAdvancedOptions(pNova);
    //nova.NovaTools.AddGraphicsOptions(pNova);
    //nova.NovaTools.AddSecurityOptions(pNova);
    //nova.NovaTools.AddSaveOptions(pNova);
    //nova.NovaTools.AddAfterSaveActions(pNova);
    //nova.NovaTools.AddEmailOptions(pNova);
    //nova.NovaTools.AddWatermarkImage(pNova);
    //nova.NovaTools.AddWatermarkText(pNova);
    //nova.NovaTools.AddPageContentOptions(pNova);
    //nova.NovaTools.AddOverlayOptions(pNova);
    //nova.NovaTools.AddSignatureOptions(pNova);
    //nova.NovaTools.AddEmbedFontsOptions(pNova);
    //nova.NovaTools.AddBookmarksDefinitions(pNova);

    //save the new added profile
    pNova.SaveProfile();
    //set the new profile as the active profile
    pNova.SetActiveProfile(_newProfileID);

    // print a test page, using the previously set active
profile settings
    using (PrintDocument pd = new PrintDocument())
    {

```

```

        pd.PrinterSettings.PrinterName = PRINTER_NAME;
        pd.PrintPage += new PrintPageEventHandler
(PrintPageFunction);
        pd.DefaultPageSettings.PaperSize = new
System.Drawing.Printing.PaperSize("PaperA4", 826, 1169);
        pd.Print();
    }

    if (isActiveProfile)
    {
        pNova.SetActiveProfile(activeProfile);
    }
    pNova.DeleteProfile(_newProfileID);
}
catch (System.Runtime.InteropServices.COMException e)
{
    MessageBox.Show(e.Message);
}
catch (Exception e)
{
    MessageBox.Show(e.Message);
}
}
// and finally the function that actually prints the page
private static void PrintPageFunction(object sender,
PrintPageEventArgs ev)
{
    string str = "novaPDF says Hello World from    C#";
    Font font = new Font("Arial", 16);
    Brush brush = new SolidBrush(Color.Black);
    ev.Graphics.DrawString(str, font, brush, 20.0f, 20.0f);
    ev.HasMorePages = false;
}
}
}

```

1.5.5.2 CSharp Converter

The **CSharp Converter** sample demonstrates how to convert an existing file by printing it to novaPDF SDK 10 using the ShellExecute function. It also demonstrates how to set different options and manage profiles.

The same approach should be taken if you print using a "Print()" method from another object (like an internet browser or a report control). Just replace the ShellExecute call with the call of your Print method.

When the application starts, it creates a few profiles and makes different settings in the profiles. Then it shows a dialog from where the user can select the active profile and change its settings using the controls from the dialog.

After that a document can be selected from the harddisk and printed to novaPDF SDK 10 using the ShellExecute function call.

When using this technique to convert a file to PDF, you have to take care of the fact that ShellExecute prints to the default printer. This function returns immediately and does not wait until the print is finished (it may return before the printing is actually started). Therefore you have to set the default printer to novaPDF SDK 10 before calling ShellExecute (using the SetDefaultPrinter method), wait the process to be started (using WaitForExit()), restore the default printer (with the RestoreDefaultPrinter method). This way you made sure that the default printer was restored and your document is printed to novaPDF SDK 10.

Source code snippets

1. DECLARE INovaPdfOptions variable

```
private NovaPdfOptions9Class mobjNovaOptios;
```

2. Initialize INovaPdfOptions

```
mobjNovaOptios = new NovaPdfOptions9Class();

// initialize the NovaPdfOptions object
mobjNovaOptios.Initialize(PRINTER_NAME, "");

//create option profiles
AddSmallProfile();
AddFullProfile();
```

3. Set novaPDF SDK 10 Options

```
try
{
    String newSmallSizeProfileId = String.Empty;
    // Set some options to this profile
    mobjNovaOptios.AddProfile(SMALL_SIZE_PROFILE,
PROFILE_IS_PUBLIC, out newSmallSizeProfileId);

    //load the new profile
    mobjNovaOptios.LoadProfile(newSmallSizeProfileId);

    // disable the "Save PDF file as" prompt
    mobjNovaOptios.SetOptionLong(NovaOptions
.NOVA PDF_SAVE_PROMPT_TYPE, 0);
    // set generated Pdf files destination folder "c:\"
    mobjNovaOptios.SetOptionString(NovaOptions.NOVA PDF_SAVE_FOLDER,
"c:\\");
    // .....
}
catch (System.Runtime.InteropServices.COMException ComException)
{
    MessageBox.Show("Error creating Small Size Profile:\r\n" +
ComException.Message);
}
```

```

        System.Diagnostics.Debug.WriteLine(ComException.Message);
    }
}

```

4. Start a print job

```

e) private void btnStartPrinting_Click(object sender, System.EventArgs
    {
        UpdateProfileFromDialog();

        if (txtFileToConvert.Text.Trim() == "")
        {
            MessageBox.Show("No file to convert!");
            return;
        }

        mobjNovaOptios.SetActiveProfile((string
)(cmbProfiles.SelectedItem.ToString()));
        mobjNovaOptios.SetDefaultPrinter();

        mobjNovaOptios.LicenseShellExecuteFile(txtFileToConvert.Text);

        Process myProcess = new Process();
        try
        {
            myProcess.StartInfo.FileName = txtFileToConvert.Text;
            myProcess.StartInfo.Verb = "Print";
            myProcess.StartInfo.CreateNoWindow = true;
            myProcess.StartInfo.WindowStyle = ProcessWindowStyle
.Hidden;
            myProcess.Start();
        }
        catch (Win32Exception ex)
        {
            if (ex.NativeErrorCode == ERROR_FILE_NOT_FOUND)
            {
                Console.WriteLine(ex.Message + ". Check the path and
filename");
            }

            else if (ex.NativeErrorCode == ERROR_ACCESS_DENIED)
            {
                // Note that if your word processor might generate
exceptions
                // such as this, which are handled first.
                Console.WriteLine(ex.Message + ". You do not have
permission to print this file.");
            }
        }
        myProcess.WaitForExit(10000);
        myProcess.Close();
        mobjNovaOptios.RestoreDefaultPrinter();
    }
}

```



```
}
```

1.5.5.3 Word OLE CSharp

The **Word OLE CSharp** sample is a simple Windows console application that converts a MS Word document (C:\Test.doc) to PDF using Word OLE automation.

Source code

```
using System;
using System.Drawing;
using System.Drawing.Printing;
using System.Windows.Forms;
// the novapiLib package must be added as a COM reference
using novapiLib9;

namespace Hello_World_CSharp
{
    /// <summary>
    /// Summary description for Class1.
    /// </summary>
    class Class1
    {
        /// <summary>
        /// The main entry point for the application.
        /// </summary>
        public static string PRINTER_NAME = "novaPDF SDK 9";
        public static int NOVAPDF_INFO_SUBJECT = 68;
        public static string PROFILE_NAME = "Test C# OLE";
        public static int PROFILE_IS_PUBLIC = 0;
        public static uint NV_PROFILE_EXISTS = 0xD5DA0006;
        public static uint NV_NO_ACTIVE_PROFILE = 0xD5DA0028;

        [STAThread]
        static void Main(string[] args)
        {
            // create the NovaPdfOptions9 object
            NovaPdfOptions9 pNova = new NovaPdfOptions9();
            // get the active profile ...
            string activeProfile = "";
            string _newProfileID = String.Empty;

            try
            {
                // initialize the NovaPdfOptions9 object
                // if you have an application license for novaPDF
                SDK,
                pNova.Initialize(PRINTER_NAME, "");

                try
                {
                    pNova.GetActiveProfile(out activeProfile);
                }
            }
        }
    }
}
```

```

        catch (System.Runtime.InteropServices.COMException
e)
        {
            // ignore profile exists error
            if (NV_NO_ACTIVE_PROFILE == (uint
)e.ErrorCode)
            {
                System.Console.WriteLine("The printer
does not have an active profile");
            }
            else
            {
                // more serious error,
propagate it
                throw e;
            }
        }

        //add a new profile
        pNova.AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
out _newProfileID);

        //load the new profile
        pNova.LoadProfile(_newProfileID);
        // and set some options
        pNova.SetOptionString(NOVAPDF_INFO_SUBJECT, "C#
Hello document");

        // save profile
        pNova.SaveProfile();
        // set the copy profile as active profile ...
        pNova.SetActiveProfile(_newProfileID);
        // set nova default printer
        pNova.SetDefaultPrinter();
        // initialize OLE usage in novaPDF
        pNova.InitializeOLEUsage("Word.Application");
        // create Word application object
        Microsoft.Office.Interop.Word._Application WordApp
= new Microsoft.Office.Interop.Word.Application();
        WordApp.DisplayAlerts =
Microsoft.Office.Interop.Word.WdAlertLevel.wdAlertsNone;
        // license OLE server in novaPDF
        pNova.LicenseOLEServer();
        // initializations
        object objMissing = System.Reflection.Missing
.Value;

        object objTrue = true; object objFalse = false;
        object strFile = @"C:\temp\test.docx";
        // create Word document object
        Microsoft.Office.Interop.Word._Document WordDoc =
WordApp.Documents.Open(ref strFile, ref objFalse, ref objTrue,
                        ref objMissing, ref objMissing, ref
objMissing, ref objMissing, ref objMissing, ref objMissing,
                        ref objMissing, ref objMissing, ref
objMissing, ref objMissing, ref objMissing, ref objMissing,

```

```

        ref objMissing);
        // print document
        WordApp.ActivePrinter = PRINTER_NAME;
        WordDoc.PrintOutOld(ref objFalse, ref objFalse, ref
/*refRange*/objMissing, ref objMissing,
        ref objMissing, ref objMissing, ref
objMissing, ref objMissing, ref objMissing, ref objMissing,
        ref objFalse, ref objMissing, ref
objMissing, ref objMissing);
        // close Word objects
        WordDoc.Close(ref objFalse, ref objMissing, ref
objFalse);
        WordApp.Quit(ref objFalse, ref objMissing, ref
objFalse);
        WordApp = null;
    }
    catch (System.Runtime.InteropServices.COMException e)
    {
        MessageBox.Show(e.Message);
    }
    catch (Exception e)
    {
        MessageBox.Show(e.Message);
    }
    // restore active profile
    if ((activeProfile.Length > 0) &&
(activeProfile.CompareTo(PROFILE_NAME) != 0))
    {
        pNova.SetActiveProfile(activeProfile);
        pNova.DeleteProfile(_newProfileID);
    }
    // restore default printer
    pNova.RestoreDefaultPrinter();
}
}
}

```

1.5.5.4 Convert Office Docs

The **Convert Office Docs** sample is a simple Windows console application that converts some Microsoft Office documents (Word, Excel, Publisher, PowerPoint and Visio) using Convert... functions. It uses Office OLE automation so Microsoft Office has to be installed.

The sample documents converted are located in the "OfficeDocuments" folder in novaPDF SDK installation folder. The pdf files are saved in the same folder.

Hidden links and internal document links are converted in pdf hyperlinks (except for Excel documents).

Source code

```

using System;
using System.Windows.Forms;
// the novapiLib package must be added as a COM reference
using novapiLib9;
using Globals;

namespace Hello_World_CSharp
{
    class Class1
    {
        public static string PRINTER_NAME = "novaPDF SDK 9";
        public static string PROFILE_NAME = "ConvertOffice";
        public static int PROFILE_IS_PUBLIC = 0;

        [STAThread]
        static void Main(string[] args)
        {
            try
            {
                // create the NovaPdfOptions object
                NovaPdfOptions9 pNova = new NovaPdfOptions9();
                // initialize the NovaPdfOptions object
                // if you have an application license for novaPDF SDK,
                // pass the license key to the Initialize() function
                pNova.Initialize(PRINTER_NAME, "");

                // get the active profile ...
                string activeProfile = null;
                try
                {
                    pNova.GetActiveProfile(out activeProfile);
                }
                catch (System.Runtime.InteropServices.COMException e)
                {
                    // ignore profile exists error
                    if (NovaErrors.NV_NO_ACTIVE_PROFILE == (uint
) e.ErrorCode)
                    {
                        System.Console.WriteLine("The printer does not have
an active profile");
                    }
                    else
                    {
                        // more serious error, propagate it
                        throw e;
                    }
                }

                string _newProfileID = String.Empty;
                //add a new profile
                pNova.AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC, out
_newProfileID);
            }
        }
    }
}

```

```

        //load the new profile
        pNova.LoadProfile(_newProfileID);

        //DO NOT OPEN PDF
        //an Open action is added by default in the profile -
delete or disable this open action

//pNova.DisableActionType((int)ActionType.NOVA_ACTION_OPEN);

        // set save options
        nova.NovaTools.AddSaveOptions(pNova);

        //save the new added profile
        pNova.SaveProfile();

        //set the new profile as the active profile
        pNova.SetActiveProfile(_newProfileID);

        //Path for novaPDF 9 SDK sample documents
        string strDocumentsPath =
"C:\\Users\\Public\\Documents\\novaPDF 9\\SDK\\OfficeDocuments\\";
        string strDocPath;

        // -----
        // Convert Word document
        // Microsoft Office Word has to be installed
        // -----
        //Document file path
        strDocPath = strDocumentsPath + "Word.docx";
        //style name | level | type
        string strHeadings = "Heading 1|1|0;Heading 2|2|0;Heading
3|3|0";

        pNova.LicenseApplication("WINWORD.EXE");
        pNova.LicenseApplication("SPLWOW64.EXE");
        pNova.ConvertWordDocument(strDocPath, 1, 0, 1, 1, 1, 1, 1,
1, 1, 3, strHeadings);

        // -----
        // Convert PowerPoint document
        // Microsoft Office PowerPoint has to be installed
        // -----
        //Document file path
        strDocPath = strDocumentsPath + "PowerPoint.pptx";
        pNova.LicenseApplication("POWERPNT.EXE");
        pNova.LicenseApplication("SPLWOW64.EXE");
        pNova.ConvertPowerPointDocument(strDocPath, 1, 1, 1, 1, 1,
1);

        // -----
        // Convert Publisher document
        // Microsoft Office Publisher has to be installed
        // -----
        //Document file path

```

```

        strDocPath = strDocumentsPath + "Publisher.pub";
        pNova.LicenseApplication("MSPUB.EXE");
        pNova.LicenseApplication("SPLWOW64.EXE");
        pNova.ConvertPublisherDocument(strDocPath, 1, 1, 1, 1, 1,
1);

        // -----
        // Convert Excel document
        // Microsoft Office Excel has to be installed
        // hidden links in Excel documents will not be converted to
pdf links
        // -----
        //Document file path
        strDocPath = strDocumentsPath + "Excel.xlsx";
        pNova.LicenseApplication("EXCEL.EXE");
        pNova.LicenseApplication("SPLWOW64.EXE");
        pNova.ConvertExcelDocument(strDocPath, 1);

        // -----
        // Convert Visio document
        // Microsoft Office Visio has to be installed
        // -----
        //Document file path
        strDocPath = strDocumentsPath + "Visio.vsd";
        pNova.LicenseApplication("VISIO.EXE");
        pNova.LicenseApplication("SPLWOW64.EXE");
        pNova.ConvertVisioDocument(strDocPath, 1, 1, 1, 1, 1);

        pNova.SetActiveProfile(activeProfile);
        pNova.DeleteProfile(_newProfileID);
    }
    catch (System.Runtime.InteropServices.COMException e)
    {
        MessageBox.Show(e.Message);
    }
    catch (Exception e)
    {
        MessageBox.Show(e.Message);
    }
}
}
}
}

```

1.5.5.5 Override Options

Override Options sample is a simple Windows console application that demonstrates the basic use of the `INovaPDFOptions` interface, without using profile options. Instead of creating a profile and setting options in the profile, the sample uses `SetOverrideOptions...` functions to quickly set some options that will overwrite active profile settings. This is useful if you have a simple application where you just wish to change the pdf file name, email address or other simple options for each printed document.

There is a limited set of options that can be set with `SetOverrideOptions...` functions, usually

settings that users can also change from the Save As dialog or the other prompt dialogs that can be shown before printing a document. If you need more complex settings, like adding a watermark, overlay or signature you have to configure them in a profile.

You can combine usage of profiles and override options functions. For instance you can create a profile with a watermark that is set as active and then use the override function just to change the file name for each document.

Once set, override options are taken in account for all printed documents until they are removed with `DeleteOverrideOptions` function.

The sample prints one page with a simple text to the novaPDF SDK 10 and generates a "OverrideOptions.pdf" file in the C:\temp folder.

Source code

```
using System;
using System.Drawing;
using System.Drawing.Printing;
using System.Windows.Forms;
// the novapiLib package must be added as a COM reference
using novapiLib9;
using Globals;

namespace Override_Options
{
    /// <summary>
    /// Summary description for Class1.
    /// </summary>
    class Class1
    {
        /// <summary>
        /// The main entry point for the application.
        /// </summary>
        public static string PRINTER_NAME = "novaPDF SDK 9";
        public static string PDF_TEXT = "Override Options";
        public static string PDF_FILE_NAME = "OverrideOptions.pdf";

        [STAThread]
        static void Main(string[] args)
        {
            try
            {
                // create the NovaPdfOptions object
                NovaPdfOptions9 pNova = new NovaPdfOptions9();
                // initialize the NovaPdfOptions object
                // if you have an application license for novaPDF SDK,
                // pass the license key to the Initialize() function
                pNova.Initialize(PRINTER_NAME, "");

                //Override options from active profile
            }
        }
    }
}
```

```

        //Save options
        //do not show prompt save dialog
        pNova.SetOverrideOptionLong(NovaOptions
.NOVAPDF_OVERRIDE_SAVE_TYPE, (int)SaveDlgType.PROMPT_SAVE_NONE);
        //save the pdf in next folder
        pNova.SetOverrideOptionLong(NovaOptions
.NOVAPDF_OVERRIDE_SAVE_FOLDER_TYPE, (int)SaveFolder.SAVEFOLDER_CUSTOM);
        pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_SAVE_FOLDER, "C:\\temp");
        pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_SAVE_FILE, PDF_FILE_NAME);
        //access folder, if restricted
        pNova.SetOverrideOptionEncryptedString(NovaOptions
.NOVAPDF_OVERRIDE_SAVE_USER, "user");
        pNova.SetOverrideOptionEncryptedString(NovaOptions
.NOVAPDF_OVERRIDE_SAVE_PASSWORD, "password");
        //if a file with the same neme already exists
        pNova.SetOverrideOptionLong(NovaOptions
.NOVAPDF_OVERRIDE_SAVE_CONFLICT, (int)SaveFileConflictType
.FILE_CONFLICT_STRATEGY_OVERWRITE);

        //disable open PDF in viewer

//pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_OPEN_VIEWER, 0);

        //Embed fonts
        pNova.SetOverrideOptionBool(NovaOptions
.NOVAPDF_OVERRIDE_EMBEDFONTS, 1);

        //Set compression level

//pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_COMPRESSION,
(int)CompressionOverride.COMPRESSION_HIGHQUALITY);

        //Merge PDF
        //Enable merge
        /*

pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_MERGE_PDF, 1);
        //Merge with the same file, if the file exists in
destination OR merge with another file

pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_MERGE_FILE_TYPE,
(int)MergeFile.MERGE_FILE_OTHER);
        //Append to existing PDF, insert at the beginning or insert
at a page number

pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_MERGE_TYPE,
(int)MergeType.MERGE_TYPE_APPEND);
        //if merge with other file, specify file name (and path)

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_MERGE_FILE,

```



```
"invoice-text.pdf");
    //if merge type is set to insert at page number

//pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_INSERT_PAGENO,
1);
    //if the existing PDF is encrypted

//pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_PDF_P
ASSWORD, "password");
    */

    //Document info
    pNova.SetOverrideOptionBool(NovaOptions
.NOVAPDF_OVERRIDE_DOC_INFO, 1);
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_DOC_TITLE, "sdk title");
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_DOC_SUBJECT, "sdk subject");
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_DOC_AUTHOR, "sdk author");
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_DOC_KEY, "sdk key");
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_DOC_CREATOR, "sdk creator");

    //Encrypt PDF
    /*

pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_SECURITY, 1);

pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_SECURIT
Y_U, "user");

pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_SECURIT
Y_O, "owner");
    */

    //Email

    pNova.SetOverrideOptionBool(NovaOptions
.NOVAPDF_OVERRIDE_SEND_EMAIL, 1);
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_REC_TO, "to");
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_REC_FROM, "from");
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_REC_CC, "cc");
    pNova.SetOverrideOptionString(NovaOptions
.NOVAPDF_OVERRIDE_REC_BCC, "bcc");

    pNova.RegisterNovaEvent(NovaEvents.NOVAPDF_EVENT_ACTIONS);

    // print a test    page, using the    previously set active
```

```

profile settings
using (PrintDocument pd = new PrintDocument())
{
    pd.PrinterSettings.PrinterName = PRINTER_NAME;
    pd.PrintPage += new PrintPageEventHandler
(PrintPageFunction);
    pd.DefaultPageSettings.PaperSize = GetPaperSize("A4");
    pd.Print();
}

int bTimeout;
pNova.WaitForNovaEvent(120000, out bTimeout);
}
catch (System.Runtime.InteropServices.COMException e)
{
    MessageBox.Show(e.Message);
}
catch (Exception e)
{
    MessageBox.Show(e.Message);
}
}

//find a predefined paper size
private static PaperSize GetPaperSize(string Name)
{
    PaperSize size1 = null;
    Name = Name.ToUpper();
    PrinterSettings settings = new PrinterSettings();
    foreach (PaperSize size in settings.PaperSizes)
        if (size.Kind.ToString().ToUpper() == Name)
        {
            size1 = size;
            break;
        }
    return size1;
}

// and finally the function that actually prints the page
private static void PrintPageFunction(object sender,
PrintPageEventArgs ev)
{
    string str = "novaPDF says Hello World from C#";
    Font font = new Font("Arial", 16);
    Brush brush = new SolidBrush(Color.Black);
    ev.Graphics.DrawString(str, font, brush, 20.0f, 20.0f);
    ev.HasMorePages = false;
}
}
}

```

1.5.6 C++

1.5.6.1 Hello World

Hello World sample is a simple Windows console application that prints one page with the "Hello World" text to the novaPDF SDK 10.

It demonstrates the basic use of the INovaPDFOptions interface. The printing job is made with Windows API calls OpenPrinter, StartDoc,....

It generates a "Hello World.pdf" file in the working folder.

Notice

If you do not use Windows API calls to print to novaPDF SDK 10, but you perform a print job by calling other controls "Print()" method, or if you print an existing document using "ShellExecute()" function, you should check the MFC Converter sample instead.

Source code

```
// HelloWorld.cpp
#include "stdafx.h"

//Include novaPDF headers
#include "..\..\include\novaOptions.h"
#include "..\..\include\novapi.h"

//name of novaPDF SDK 10
#define PRINTER_NAME L"novaPDF SDK 10"

//text to be written in the PDF file
#define PDF_TEXT L"Hello world!"

//PDF file name
#define PDF_FILE_NAME L"HelloWorld.pdf"

//Print profile name
#define PROFILE_NAME L"HelloWorld Profile"
#define PROFILE_IS_PUBLIC 0

//entry point for the console application
int _tmain(int argc, _TCHAR* argv[])
{
    HRESULT hr = S_OK;

    //initialize COM
    hr = CoInitialize(NULL);
    if (FAILED (hr))
    {
        MessageBox(NULL, L"Failed to initialize COM", L"novaPDF", MB_OK);
        return hr;
    }

    //create one NovaPdfOptions instance
```

```

    INovaPdfOptions *pNova = 0;
    hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL, CLSCTX_INPROC_SERVER, __L
    if (FAILED(hr))
    {
        MessageBox(NULL, L"Failed to create novaPDF COM object", L"novaPDF", MB_OK);
        return hr;
    }

    // initialize the NovaPdfOptions object to use with a printer licensed for SDK
    hr = pNova->Initialize(PRINTER_NAME, L"");

    if (SUCCEEDED(hr))
    {
        LPWSTR pwsOldActiveProfileID = NULL;
        LPWSTR pwsNewProfileID = NULL;

        hr = pNova->GetActiveProfile(&pwsOldActiveProfileID);

        //create a new profile with default settings
        hr = pNova->AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
        &pwsNewProfileID);

        //load the newly created profile
        if (SUCCEEDED(hr) && pwsNewProfileID)
        {
            hr = pNova->LoadProfile(pwsNewProfileID);
        }
        else
        {
            MessageBox(NULL, L"Failed to create profile", L"novaPDF",
        MB_OK);
            return hr;
        }

        // set PDF document Title
        pNova->SetOptionString(NOVAPDF_DOCINFO_TITLE, L"My Doc Title");

        //what type of save dialog to be shown (none, simple or extended)
        pNova->SetOptionLong(NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_SIMPLE);

        //you may choose a predefined folder like "My Documents"
        pNova->SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE, SAVEFOLDER_MYDOCUMENTS);

        //set a macro for the file name
        pNova->SetOptionString(NOVAPDF_SAVE_FILE_NAME, L"test_[N]");

        //in case a file with the same name exists in the selected folder,
        choose what to do
        pNova->SetOptionLong(NOVAPDF_SAVE_FILEEXIST_ACTION,
        FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW);

        //save profile changes
        hr = pNova->SaveProfile();
        //set as active profile for printer
        pNova->SetActiveProfile(pwsNewProfileID);
    }

```

```

HANDLE      hPrinter;
PDEVMODEW   pDevmode = NULL;
PRINTER_DEFAULTS pd = { NULL, NULL, PRINTER_ACCESS_USE };

//start print job
if (OpenPrinter(PRINTER_NAME, &hPrinter, &pd))
{
    //get default printer DEVMODE
    int nSize = DocumentProperties(NULL, hPrinter, PRINTER_NAME,
NULL, NULL, 0);
    pDevmode = (PDEVMODEW)LocalAlloc(LPTR, nSize);
    DocumentProperties(NULL, hPrinter, PRINTER_NAME, pDevmode, NULL,
DM_OUT_BUFFER);

    //set page size in DEVMODE
    pDevmode->dmPaperSize = DMPAPER_USER;
    pDevmode->dmPaperLength = 2970; //5940;
    pDevmode->dmPaperWidth = 2100; //4200;
    pDevmode->dmFields = DM_PAPERSIZE | DM_PAPERLENGTH |
DM_PAPERWIDTH;
    DocumentProperties(NULL, hPrinter, PRINTER_NAME, pDevmode,
pDevmode, DM_IN_BUFFER | DM_OUT_BUFFER);

    //Print a page
    HDC hDC = CreateDC(L"", PRINTER_NAME, NULL, pDevmode);
    DOCINFO docInfo = { sizeof(DOCINFO) };
    //document name
    docInfo.lpszDocName = PDF_FILE_NAME;
    StartDoc(hDC, &docInfo);
    StartPage(hDC);
    // Draw text on page
    TextOut(hDC, 100, 80, PDF_TEXT, (int) wcslen(PDF_TEXT));
    EndPage(hDC);
    EndDoc(hDC);
    DeleteDC(hDC);

    //print job sent to printer
    MessageBox(NULL, L"Print job finished", L"novaPDF", MB_OK);

    LocalFree(pDevmode);
    ClosePrinter(hPrinter);
}
else
{
    WCHAR wsMessage[255];
    wsprintf(wsMessage, L"OpenPrinter failed, error = %d",
GetLastError());
    MessageBox(NULL, wsMessage, L"novaPDF", MB_OK);
}

//restore default profile
if (pwsOldActiveProfileID)
{
    pNova->SetActiveProfile(pwsOldActiveProfileID);
}

```

```

        //delete newly created profile
        pNova->DeleteProfile(pwsNewProfileID);
        //free memory
        CoTaskMemFree(pwsNewProfileID);
        CoTaskMemFree(pwsOldActiveProfileID);
    }
    else
    {
        MessageBox(NULL, L"Failed to initialize novaPDF Printer", L"novaPDF",
MB_OK);
    }

    //release NovaPdfOptions
    pNova->Release();
    CoUninitialize();
    return 0;
}

```

1.5.6.2 Hello World (network)

Hello World (network) sample is similar with Hello World sample but it can be used from network and print to novaPDF installed on a different computer. The sample requests the shared printer name in a dialog as "\\computer name\printer name" (for example if novaPDF SDK 10 is installed on WS1, then you should enter "\\WS1\novaPDF SDK 10"). See Network use topic for more details on how to use novaPDF on network.

Source Code snippets (in addition to Hello World source code)

```

{
    //...
    //initialize COM
    hr = CoInitialize(NULL);
    if (FAILED (hr))
    {
        MessageBoxW(NULL, L"Failed to initialize COM", L"novaPDF", MB_OK);
        return hr;
    }

    //create one NovaPdfOptions instance
    INovaPdfOptions *pNova = 0;
    hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL, CLSCTX_INPROC_SERVER, __U
    if (FAILED(hr))
    {
        MessageBoxW(NULL, L"Failed to create novaPDF COM object", L"novaPDF", MB_OK);
        return hr;
    }
    DWORD dwSize = 256;
    WCHAR strWorkStation[256];

    //find out computer name
    GetComputerNameW(strWorkStation, &dwSize);
}

```

```

PrinterNameDlg dlg;
//construct printer name as "\\computer name\printer name"
dlg.m_strPrinterName.Format(L"\\\\%s\\%s", strWorkStation, PRINTER_NAME);

//get printer name from user
if (IDCANCEL == dlg.DoModal())
{
    pNova->Release();
    CoUninitialize();
    return hr;
}
CString strPrinterName = dlg.m_strPrinterName;

// initialize the NovaPdfOptions object to use with a printer licensed for SDK
hr = pNova->Initialize((LPCWSTR)strPrinterName, L "");

//...
}

```

1.5.6.3 Convert Office Docs

The **Convert Office Docs** sample is a simple Windows console application that converts some Microsoft Office documents (Word, Excel, Publisher, PowerPoint and Visio) using Convert... functions. It uses Office OLE automation so Microsoft Office has to be installed.

The sample documents converted are located in the "OfficeDocuments" folder in novaPDF SDK installation folder. The pdf files are saved in the same folder.

Hidden links and internal document links are converted in pdf hyperlinks (except for Excel documents).

Source code

```

#include "stdafx.h"
//Include novaPDF headers
#include "..\..\..\include\novaOptions.h"
#include "..\..\..\include\novaEvents.h"
#include "..\..\..\include\novapi.h"
#include "nova.h"

#define PRINTER_NAME    L"novaPDF SDK 9"

//Print profile name
#define PROFILE_NAME    L"ConvertOfficeDocs Profile"
#define PROFILE_IS_PUBLIC 0

int _tmain(int argc, _TCHAR* argv[])
{
    HRESULT hr = S_OK;

    //initialize COM

```

```

    hr = CoInitialize(NULL);
    if (FAILED (hr))
    {
        MessageBox(NULL, L"Failed to initialize COM", L"novaPDF", MB_OK);
        return hr;
    }

    //create one NovaPdfOptions instance
    INovaPdfOptions9 *pNova = 0;
    hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL, CLSCTX_INPROC_SERVER,
__uuidof(INovaPdfOptions9), (LPVOID*) &pNova);

    if (FAILED(hr))
    {
        MessageBox(NULL, L"Failed to create novaPDF COM object", L"novaPDF",
MB_OK);
        return hr;
    }

    // initialize the NovaPdfOptions object to use with a printer licensed for SDK
    // if you have an application license for novaPDF SDK,
    // pass the license key to the Initialize() function
    hr = pNova->Initialize(PRINTER_NAME, L "");

    if (SUCCEEDED(hr))
    {
        LPWSTR pwsOldActiveProfileID = NULL;
        LPWSTR pwsNewProfileID = NULL;

        hr = pNova->GetActiveProfile(&pwsOldActiveProfileID);

        //create a new profile with default settings
        hr = pNova->AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
&pwsNewProfileID);

        //load the newly created profile
        if (SUCCEEDED(hr) && pwsNewProfileID)
        {
            hr = pNova->LoadProfile(pwsNewProfileID);
        }
        else
        {
            MessageBox(NULL, L"Failed to create profile", L"novaPDF",
MB_OK);
            return hr;
        }

        // set novaPDF options
        // uncomment the function calls for the options you wish to set and
        change the options in nova.cpp unit

        //DO NOT OPEN PDF
        //an Open action is added by default in the profile - delete or disable
        this open action
        //pNova->DisableActionType(NOVA_ACTION_OPEN);

```



```

//Save pdf files to OfficeDocuments folder
AddSaveOptions(pNova);

//save profile changes
hr = pNova->SaveProfile();
//set as active profile for printer
pNova->SetActiveProfile(pwsNewProfileID);

//Path for novaPDF 9 SDK sample documents
WCHAR wsDocumentsPath[MAX_PATH];
WCHAR wsDocPath[MAX_PATH];
SHGetFolderPath(NULL, CSIDL_COMMON_DOCUMENTS, NULL, 0, wsDocumentsPath);
wcscat(wsDocumentsPath, L"\\novaPDF 9\\SDK\\OfficeDocuments\\");

// -----
// Convert Word document
// Microsoft Office Word has to be installed
// -----
//Document file path
wcscpy(wsDocPath, wsDocumentsPath);
wcscat(wsDocPath, L"Word.docx");
//style name | level | type
WCHAR wsHeadings[200] = L"Heading 1|1|0;Heading 2|2|0;Heading 3|3|0";
pNova->LicenseApplication(L"WINWORD.EXE");
pNova->LicenseApplication(L"SPLWOW64.EXE");
hr = pNova->ConvertWordDocument(wsDocPath, TRUE, FALSE, TRUE, TRUE,
TRUE, TRUE, TRUE, TRUE, TRUE, 3, wsHeadings);

// -----
// Convert PowerPoint document
// Microsoft Office PowerPoint has to be installed
// -----
//Document file path
wcscpy(wsDocPath, wsDocumentsPath);
wcscat(wsDocPath, L"PowerPoint.pptx");
pNova->LicenseApplication(L"POWERPNT.EXE");
pNova->LicenseApplication(L"SPLWOW64.EXE");
hr = pNova->ConvertPowerPointDocument(wsDocPath, TRUE, TRUE, TRUE, TRUE,
TRUE, TRUE);

// -----
// Convert Publisher document
// Microsoft Office Publisher has to be installed
// -----
//Document file path
wcscpy(wsDocPath, wsDocumentsPath);
wcscat(wsDocPath, L"Publisher.pub");
pNova->LicenseApplication(L"MSPUB.EXE");
pNova->LicenseApplication(L"SPLWOW64.EXE");
hr = pNova->ConvertPublisherDocument(wsDocPath, TRUE, TRUE, TRUE, TRUE,
TRUE, TRUE);

// -----
// Convert Excel document
// Microsoft Office Excel has to be installed
// hidden links in Excel documents will not be converted to pdf links

```

```

// -----
//Document file path
wscpy(wsDocPath, wsDocumentsPath);
wscat(wsDocPath, L"Excel.xlsx");
pNova->LicenseApplication(L"EXCEL.EXE");
pNova->LicenseApplication(L"SPLWOW64.EXE");
hr = pNova->ConvertExcelDocument(wsDocPath, TRUE);

// -----
// Convert Visio document
// Microsoft Office Visio has to be installed
// -----
//Document file path
wscpy(wsDocPath, wsDocumentsPath);
wscat(wsDocPath, L"Visio.vsd");
pNova->LicenseApplication(L"VISIO.EXE");
pNova->LicenseApplication(L"SPLWOW64.EXE");
hr = pNova->ConvertVisioDocument(wsDocPath, TRUE, TRUE, TRUE, TRUE,
TRUE);

//restore default profile
pNova->SetActiveProfile(pwsOldActiveProfileID);

//delete newly created profile
pNova->DeleteProfile(pwsNewProfileID);
//free memory
CoTaskMemFree(pwsNewProfileID);
if(pwsOldActiveProfileID)
{
    CoTaskMemFree(pwsOldActiveProfileID);
}
else
{
    MessageBox(NULL, L"Failed to initialize novaPDF Printer", L"novaPDF",
MB_OK);
}

//release NovaPdfOptions
pNova->Release();
CoUninitialize();
return 0;
}

```

1.5.6.4 MFC Converter

The **MFC Converter** sample demonstrates how to convert an existing file by printing it to novaPDF SDK 10 using the ShellExecute function. It also demonstrates how to set different options and manage profiles.

The same approach should be taken if you print using a "Print()" method from another object (like an internet browser or a report control). Just replace the ShellExecute call with the call of your Print method.

When the application starts, it creates a few profiles and makes different settings in the profiles. Then it shows a dialog from where the user can select the active profile and change its settings using the controls from the dialog.

After that a document can be selected from the harddisk and printed to novaPDF SDK 10 using the ShellExecute function call.

When using this technique to convert a file to PDF, you have to take care of the fact that ShellExecute prints to the default printer. This function returns immediately and does not wait until the print is finished (it may return before the printing is actually started). Therefore you have to set the default printer to novaPDF SDK 10 before calling ShellExecute (using the SetDefaultPrinter method), register FileSaved message (or any other novaPDF SDK 10 message) to be sure that the print job was started. In this message handler restore the default printer (with the RestoreDefaultPrinter method). This way you made sure that the default printer was restored and your document is printed to novaPDF SDK 10.

Source code snippets

1. Declare INovaPdfOptions variable

```
//declare an INovaPdfOptions member variable
private :
    INovaPdfOptions *m_novaOptions;
```

2. Register novaPDF SDK 10 messages

```
const UINT  wm_Nova_FileSaved = RegisterWindowMessageW( MSG_NOVAPDF2_FILESAVED );
const UINT  wm_Nova_PrintError = RegisterWindowMessageW( MSG_NOVAPDF2_PRINTERROR );

BEGIN_MESSAGE_MAP(CnovaPrintDlg,  CDialog)

    //...

    ON_REGISTERED_MESSAGE(wm_Nova_FileSaved, OnNovaPDFFileSaved)
    ON_REGISTERED_MESSAGE(wm_Nova_PrintError, OnNovaPDFPrintError)

    //...

END_MESSAGE_MAP()
```

3. Initialize INovaPdfOptions

```
BOOL  CnovaPrintDlg::OnInitDialog()
{
    //...

    HRESULT hr = S_OK;
    m_novaOptions = 0;

    //create an instance of INovaPdfOptions
```

```

        hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL, CLSCTX_INPROC_SERVER,
if (SUCCEEDED(hr)) {
    // initialize the NovaPdfOptions object to use with a printer licensed for
    hr = m_novaOptions->Initialize(PRINTER_NAME, L"");
}
else {
    ::MessageBoxW(NULL, L"Failed to create novaPDF COM object", L"novaPDF", MB_OK);
}
//...
}

```

4. Release INovaPDFOptions

```

CnovaPrintDlg::~CnovaPrintDlg()
{
    //...

    //delete profiles
if (m_wsProfileSmall)
{
    hr = m_novaOptions->DeleteProfile(m_wsProfileSmall);
    CoTaskMemFree(m_wsProfileSmall);
}
if (m_wsProfileFull)
{
    hr = m_novaOptions->DeleteProfile(m_wsProfileFull);
    CoTaskMemFree(m_wsProfileFull);
}
// destroy our nova options object
if (m_novaOptions) {
    m_novaOptions->Release();
}
// uninitialized COM libraries
CoUninitialize();

//...
}

```

5. Set novaPDF SDK 10 Options

```

BOOL CnovaPrintDlg::OnInitDialog()
{
    // Add a profile called "Small size". If profile L"Small size" exists
    this will fail
    hr = m_novaOptions->AddProfile(SMALL_SIZE_PROFILE, PROFILE_IS_PUBLIC,
    &m_wsProfileSmall);

    //load the newly created profile
if (SUCCEEDED(hr) && m_wsProfileSmall)
{
    //load profile
    m_novaOptions->LoadProfile(m_wsProfileSmall);
}

```

```

        // disable the "Save PDF file as" prompt
        m_novaOptions->SetOptionLong(NOVAPDF_SAVE_PROMPT_TYPE,
PROMPT_SAVE_NONE);
        // set generated Pdf files destination folder ("c:\")
        m_novaOptions->SetOptionLong(NOVAPDF_SAVE_LOCATION,
LOCATION_TYPE_LOCAL);
        m_novaOptions->SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE,
SAVEFOLDER_CUSTOM);
        m_novaOptions->SetOptionString(NOVAPDF_SAVE_FOLDER,
szExeDirectory);
        // set output file name
        m_novaOptions->SetOptionString(NOVAPDF_SAVE_FILE_NAME, L"PDF
Converter small size.pdf");
        // if file exists in the destination folder, append a counter
to the end of the file name
        m_novaOptions->SetOptionLong(NOVAPDF_SAVE_FILEEXIST_ACTION,
FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW);
        //Set other options
        //...

        //save profile changes
        m_novaOptions->SaveProfile();
    }
}

```

6. Start a print job

```

void CnovaPrintDlg::OnBnClickedOk()
{
    //...

    HRESULT hr = S_OK;

    // set the active profile to be used for printing
    hr = m_novaOptions->SetActiveProfile(m_strProfileId);

    // register our window to receive messages from the printer
    hr = m_novaOptions->RegisterEventWindow((LONG) GetSafeHwnd());

    // set novaPDF as default printer, so it will be used by ShellExecute
    hr = m_novaOptions->SetDefaultPrinter();

    // license file for ShellExecute
    hr =
m_novaOptions->LicenseShellExecuteFile(m_strFileToConvert.AllocSysString())
;

    // print the document
    m_bPrintJobPending = TRUE;
    HINSTANCE hExec = ShellExecute(GetSafeHwnd(), L"print",
m_strFileToConvert, NULL, NULL, SW_HIDE);
}

```

```

//...
}

```

7. Restore default printer when printing finished

```

LRESULT CnovaPrintDlg::OnNovaPDFFileSaved(WPARAM wParam, LPARAM lParam)
{
    // restore original default printer
    m_novaOptions->UnRegisterEventWindow();
    m_novaOptions->RestoreDefaultPrinter();
    m_bPrintJobPending = FALSE;
    return 0;
}

LRESULT CnovaPrintDlg::OnNovaPDFPrintError(WPARAM wParam, LPARAM lParam)
{
    switch(wParam){
        case ERROR_MSG_TEMP_FILE:
            MessageBox(L"Error saving temporary file on printer server", L"novaPDF", MB_OK);
            break;
        case ERROR_MSG_LIC_INFO:
            MessageBox(L"Error reading license information", L"novaPDF", MB_OK);
            break;
        case ERROR_MSG_SAVE_PDF:
            MessageBox(L"Error saving PDF file", L"novaPDF", MB_OK);
            break;
        case ERROR_MSG_JOB_CANCELED:
            MessageBox(L"Print job was canceled", L"novaPDF", MB_OK);
            break;
    }
    // restore original default printer
    m_novaOptions->UnRegisterEventWindow();
    m_novaOptions->RestoreDefaultPrinter();
    m_bPrintJobPending = FALSE;
    return 0;
}

```

1.5.6.5 MFC Scribble

The **MFC Scribble** sample extends the standard MFC Scribble sample with the generation of PDF files using novaPDF SDK 10. It demonstrates how to integrate novaPDF SDK in a document/view MFC architecture:

Source code snippets

1. Register novaPDF SDK 10 event

```

#define PROFILE_NAME        L"MFC Scribble Profile"
#define PDF_FILE_NAME      L"MFC Scribble.pdf"
#define PROFILE_IS_PUBLIC  0

// This message is sent when the PDF file is finished and saved on the harddisk

```

```

const UINT  wm_Nova_FileSaved = RegisterWindowMessageW( MSG_NOVAPDF2_FILESAVED );
BEGIN_MESSAGE_MAP(CScribbleView, CScrollView)
   //{{AFX_MSG_MAP(CScribbleView)
    //...
   //}}AFX_MSG_MAP
    //...
    ON_REGISTERED_MESSAGE(wm_Nova_FileSaved, OnNovaPDFFileSaved)
END_MESSAGE_MAP()

```

2. Initialize INovaPDFOptions

```

CScribbleView::CScribbleView()
{
    //...
    HRESULT hr = CoInitialize(NULL);
    //...
    //create novaPDFOptions object
    hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL, CLSCTX_INPROC_SERVER, __uuidof(INovaPdfOptions9), (void*)0, &m_pNova);
    // initialize the NovaPdfOptions object to use with a printer licensed for SDK
    hr = m_pNova->Initialize(PRINTER_NAME, L"");
    //...
}

```

3. Release INovaPDFOptions

```

CScribbleView::~CScribbleView()
{
    //release novaPDFOptions object
    if (m_pNova){
        m_pNova->Release();
    }
    CoUninitialize();
}

```

4. Set novaPDF SDK 10 Options

```

BOOL CScribbleView::OnPreparePrinting(CPrintInfo* pInfo)
{
    //set novaPDF default printer
    if (m_pNova){
        m_pNova->SetDefaultPrinter();
        HRESULT hr;
        hr = m_pNova->GetActiveProfile(&m_wsDefaultProfile);

        //create a new profile with default settings
        hr = m_pNova->AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
&m_wsNewProfile);

        //load the newly created profile
        if (SUCCEEDED(hr) && m_wsNewProfile)
        {
            hr = m_pNova->LoadProfile(m_wsNewProfile);
        }
        else
    }
}

```

```

        {
            MessageBox(L"Failed to create profile", L"novaPDF",
MB_OK);
            return hr;
        }

        // set PDF document Title
m_pNova->SetOptionString(NOVAPDF_DOCINFO_TITLE, L"MFC Scribble
Sample");
        // set resulting file name
m_pNova->SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE,
SAVEFOLDER_CUSTOM);
m_pNova->SetOptionLong(NOVAPDF_SAVE_LOCATION,
LOCATION_TYPE_LOCAL);
m_pNova->SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE,
SAVEFOLDER_CUSTOM);
m_pNova->SetOptionString(NOVAPDF_SAVE_FOLDER, L"C:\\temp");
m_pNova->SetOptionString(NOVAPDF_SAVE_FILE_NAME,
PDF_FILE_NAME);
        //do not show prompt dialog
m_pNova->SetOptionLong(NOVAPDF_SAVE_PROMPT_TYPE,
PROMPT_SAVE_NONE);
        //if file exists, override
m_pNova->SetOptionLong(NOVAPDF_SAVE_FILEEXIST_ACTION,
FILE_CONFLICT_STRATEGY_OVERWRITE);

        //save profile changes
hr = m_pNova->SaveProfile();
        //set as active profile for printer
m_pNova->SetActiveProfile(m_wsNewProfile);

        //register window to receive messages from novaPDF printer
m_pNova->RegisterEventWindow((LONG)m_hWnd);
        //...
    }

```

5. Restore options when printing finished

```

void CScribbleView::OnEndPrinting(CDC* /*pDC*/, CPrintInfo* /*pInfo*/)
{
    if (m_pNova)
    {
        //unregister events
m_pNova->UnRegisterEventWindow();
        //restore default profile
if (m_wsDefaultProfile)
        {
            m_pNova->SetActiveProfile(m_wsDefaultProfile);
        }

        //delete newly created profile
m_pNova->DeleteProfile(m_wsNewProfile);
        //free memory
CoTaskMemFree(m_wsNewProfile);
    }
}

```



```

        CoTaskMemFree(m_wsDefaultProfile);
        m_wsDefaultProfile = NULL;
        m_wsNewProfile = NULL;
        //restore default printer
        m_pNova->RestoreDefaultPrinter();
    }
}

```

6. novaPDF SDK 10 message handler

```

LRESULT CScribbleView::OnNovaPDFFileSaved(WPARAM, LPARAM)
{
    //PDF is saved, so just show a message that the conversion to PDF was successful
    MessageBox(L"PDF file was saved successfully", L"novaPrint");
    return 0;
}

```

1.5.6.6 Temporary printer

Temporary printer sample is similar with **Hello World** sample but it uses temporary printers. It demonstrates the use of `AddNovaPrinter` and `DeleteNovaPrinter`.

Source code

```

#include "stdafx.h"

//Include novaPDF headers
#include "..\..\..\include\novaOptions.h"

//NovaPdfOptions
#include "..\..\..\include\novapi.h"

#include "nova.h"

//name of novaPDF Printer Demo
#define PRINTER_NAME    L"novaPDF temporary printer"
#define PORT_NAME      L"novaPDF9temp"

//text to be written in the PDF file
#define PDF_TEXT        L"Hello world!"

//PDF file name
#define PDF_FILE_NAME    L"HelloWorld.pdf"

//Print profile name
#define PROFILE_NAME     L"HelloWorld Profile"
#define PROFILE_IS_PUBLIC 0

//entry point for the console application
int _tmain(int argc, _TCHAR* argv[])
{
    HRESULT hr = S_OK;

    //initialize COM
    hr = CoInitialize(NULL);
    if (FAILED (hr))

```

```

    {
        MessageBox(NULL, L"Failed to initialize COM", L"novaPDF", MB_OK);
        return hr;
    }

    //create one NovaPdfOptions instance
    INovaPdfOptions *pNova = 0;
    hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL, CLSCTX_INPROC_SERVER,
__uuidof(INovaPdfOptions9), (LPVOID*) &pNova);

    if (SUCCEEDED(hr))
    {
        //add temporary printer
        pNova->AddNovaPrinter(PRINTER_NAME, PORT_NAME, L
"nPdfSdk9_Softland", L"8501", L "");
        // set optional PDF settings
        LPWSTR pwsNewProfileID = NULL;
        //create a new profile with default settings
        hr = pNova->AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
&pwsNewProfileID);

        //load the newly created profile
        if (SUCCEEDED(hr) && pwsNewProfileID)
        {
            hr = pNova->LoadProfile(pwsNewProfileID);
        }
        else
        {
            MessageBox(NULL, L"Failed to create profile", L"novaPDF",
MB_OK);
            return hr;
        }

        // set novaPDF options
        // set PDF document Title
        pNova->SetOptionString(NOVAPDF_DOCINFO_TITLE, L"My Doc Title");

        //what type of save dialog to be shown (none, simple or extended)
        pNova->SetOptionLong(NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_SIMPLE);

        //you may choose a predefined folder like "My Documents"
        pNova->SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE, SAVEFOLDER_MYDOCUMENTS);

        //set a macro for the file name
        pNova->SetOptionString(NOVAPDF_SAVE_FILE_NAME, L"test_[N]");

        //in case a file with the same name exists in the selected folder,
        choose what to do
        pNova->SetOptionLong(NOVAPDF_SAVE_FILEEXIST_ACTION,
FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW);

        //save profile changes
        hr = pNova->SaveProfile();

        //set as active profile for printer
    }

```

```

pNova->SetActiveProfile(pwsNewProfileID);

HANDLE      hPrinter;
PDEVMODEW   pDevmode = NULL;
PRINTER_DEFAULTS pd = { NULL, NULL, PRINTER_ACCESS_USE };

//start print job
if (OpenPrinter(PRINTER_NAME, &hPrinter, &pd))
{
    //get default printer DEVMODE
    int nSize = DocumentProperties(NULL, hPrinter,
PRINTER_NAME, NULL, NULL, 0);
    pDevmode = (PDEVMODEW)LocalAlloc(LPTR, nSize);
    DocumentProperties(NULL, hPrinter, PRINTER_NAME,
pDevmode, NULL, DM_OUT_BUFFER);

    //set page size in DEVMODE
    pDevmode->dmPaperSize = DMPAPER_USER;
    pDevmode->dmPaperLength = 2970;
    pDevmode->dmPaperWidth = 2100;
    pDevmode->dmFields = DM_PAPERSIZE | DM_PAPERLENGTH |
DM_PAPERWIDTH;
    DocumentProperties(NULL, hPrinter, PRINTER_NAME,
pDevmode, pDevmode, DM_IN_BUFFER | DM_OUT_BUFFER);

    //Print a page
    HDC hDC = CreateDC(L"", PRINTER_NAME, NULL, pDevmode);
    DOCINFO docInfo = {sizeof(DOCINFO)};
    // PDF document name and path
    docInfo.lpszDocName = PDF_FILE_NAME;
    StartDoc(hDC, &docInfo);
    StartPage(hDC);
    // Draw text on page
    TextOut(hDC, 100, 80, PDF_TEXT, (int) wcslen(PDF_TEXT));
    EndPage(hDC);
    EndDoc(hDC);
    DeleteDC(hDC);

    //print job sent to printer
    MessageBox(NULL, L"Print job finished", L"novaPDF",
MB_OK);

    LocalFree(pDevmode);
    ClosePrinter(hPrinter);
}
else
{
    WCHAR wsMessage[255];
    wsprintf(wsMessage, L"OpenPrinter failed, error = %d",
GetLastError());
    MessageBox(NULL, wsMessage, L"novaPDF", MB_OK);
}

```

```

        //delete newly created profile
        pNova->DeleteProfile(pwsNewProfileID);
        //free memory
        CoTaskMemFree(pwsNewProfileID);
        //delete temporary printer
        pNova->DeleteNovaPrinter(PRINTER_NAME);    }

    //release NovaPdfOptions
    pNova->Release();
    CoUninitialize();
    return 0;
}

```

1.5.6.7 Multiple printers

Multiple printers sample is similar with the Temporary printer sample but it uses several threads.

Source code

```

// HelloWorld.cpp
#include "stdafx.h"

//Include novaPDF headers
#include "..\..\..\include\novaOptions.h"

//NovaPdfOptions
#include "..\..\..\include\novapi.h"

#include "nova.h"

//name of novaPDF Printer Demo
#define PRINTER_NAME1    L"novaPDF temporary printer1"
#define PRINTER_NAME2    L"novaPDF temporary printer2"
#define PRINTER_NAME3    L"novaPDF temporary printer3"

#define PORT_NAME1        L"novaPDF9temp1"
#define PORT_NAME2        L"novaPDF9temp2"
#define PORT_NAME3        L"novaPDF9temp3"

#define FILE_NAME1        L"first.pdf"
#define FILE_NAME2        L"second.pdf"
#define FILE_NAME3        L"third.pdf"

//text to be written in the PDF file
#define PDF_TEXT          L"Hello world!"

//PDF file name
#define PDF_FILE_NAME      L"HelloWorld.pdf"

//Print profile name
#define PROFILE_NAME        L"HelloWorld Profile"
#define PROFILE_IS_PUBLIC  0

typedef struct _PRT_THREAD_PARAM {

```

```

        WCHAR wsPrinterName[255];
        WCHAR wsPortName[255];
        WCHAR wsFileName[255];
    } PRT_THREAD_PARAM;

DWORD WINAPI PrtThreadProc(LPVOID lpParameter);
HANDLE CreatePrtThread(LPWSTR p_strPrinterName, LPWSTR p_wsFileName);

//entry point for the console application
int _tmain(int argc, _TCHAR* argv[])
{
    HANDLE hThread1 = CreatePrtThread(PRINTER_NAME1, PORT_NAME1, FILE_NAME1);
    HANDLE hThread2 = CreatePrtThread(PRINTER_NAME2, PORT_NAME2, FILE_NAME2);
    HANDLE hThread3 = CreatePrtThread(PRINTER_NAME3, PORT_NAME3, FILE_NAME3);

    if (hThread1 > 0){
        //wait to stop processing events
        WaitForSingleObject(hThread1, INFINITE);
        CloseHandle(hThread1);
    }

    if (hThread2 > 0){
        //wait to stop processing events
        WaitForSingleObject(hThread2, INFINITE);
        CloseHandle(hThread2);
    }

    if (hThread3 > 0){
        //wait to stop processing events
        WaitForSingleObject(hThread3, INFINITE);
        CloseHandle(hThread3);
    }

    return 0;
}

HANDLE CreatePrtThread(LPWSTR p_strPrinterName, LPWSTR p_wsPortName, LPWSTR
p_wsFileName)
{
    PRT_THREAD_PARAM* pParams;
    DWORD dwThreadId;

    // Transmit parameters for thread: pipe handle and PDF temp file name
    pParams = (PRT_THREAD_PARAM*)GlobalAlloc(LPTR, sizeof(PRT_THREAD_PARAM));
    wcscpy(pParams->wsPrinterName, p_strPrinterName);
    wcscpy(pParams->wsPortName, p_wsPortName);
    wcscpy(pParams->wsFileName, p_wsFileName);
    // Create the thread
    HANDLE hThread =CreateThread(
        NULL,                // no security attribute
        0,                   // default stack size
        (LPTHREAD_START_ROUTINE) PrtThreadProc,
        (LPVOID) pParams,    // thread parameter
        0,                   // not suspended
        &dwThreadId);        // returns thread ID
}

```

```

        return hThread;
    }

DWORD WINAPI PrtThreadProc(LPVOID lpParameter)
{
    HRESULT hr = S_OK;

    //initialize COM
    hr = CoInitialize(NULL);
    if (FAILED (hr))
    {
        MessageBox(NULL, L"Failed to initialize COM", L"novaPDF", MB_OK);
        return hr;
    }

    // Read thread's parameter: a handle to a pipe instance and the name of the
    temporary PDF file
    PRT_THREAD_PARAM* pParams = ((PRT_THREAD_PARAM*)lpParameter);

    INovaPdfOptions *pNova = 0;
    hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL, CLSCTX_INPROC_SERVER,
        __uuidof(INovaPdfOptions9), (LPVOID*) &pNova);

    //if you have an application license for novaPDF SDK, call the
    RegisterLicenseKey() function
    //hr = pNova->RegisterLicenseKey("<registration name>", "<license key>",
    "<application name>");

    if (SUCCEEDED(hr))
    {
        //add temporary printer
        pNova->AddNovaPrinter(pParams->wsPrinterName,
        pParams->wsPortName, L"nPdfSdk9_Softland", L"8501", L "");

        // set optional PDF settings
        LPWSTR pwsNewProfileID = NULL;
        //create a new profile with default settings
        hr = pNova->AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
        &pwsNewProfileID);

        //load the newly created profile
        if (SUCCEEDED(hr) && pwsNewProfileID)
        {
            hr = pNova->LoadProfile(pwsNewProfileID);
        }
        else
        {
            pNova->Release();
            return hr;
        }

        if (SUCCEEDED(hr) && pwsNewProfileID)
        {
            // set novaPDF options

```

```

        // set resulting file name
        pNova->SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE,
SAVEFOLDER_CUSTOM);
        pNova->SetOptionLong(NOVAPDF_SAVE_LOCATION,
LOCATION_TYPE_LOCAL);
        pNova->SetOptionLong(NOVAPDF_SAVE_FOLDER_TYPE,
SAVEFOLDER_CUSTOM);
        pNova->SetOptionString(NOVAPDF_SAVE_FOLDER, L
"C:\\temp\\novaPDF");
        pNova->SetOptionString(NOVAPDF_SAVE_FILE_NAME,
pParams->wsFileName);
        //do not show prompt dialog
        pNova->SetOptionLong(NOVAPDF_SAVE_PROMPT_TYPE,
PROMPT_SAVE_NONE);
        //if file exists, override
        pNova->SetOptionLong(NOVAPDF_SAVE_FILEEXIST_ACTION,
FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW);
        //do not open
        pNova->SetOptionBool(NOVAPDF_ACTION_DEFAULT_VIEWER,
FALSE);

        //save profile changes
        hr = pNova->SaveProfile();
        //set as active profile for printer
        pNova->SetActiveProfile(pwsNewProfileID);

        HANDLE      hPrinter;
        BOOL bTimeout;
        PDEVMODEW pDevmode = NULL;
        PRINTER_DEFAULTS pd = { NULL, NULL, PRINTER_ACCESS_USE };

        for (int i = 1; i <= 10; i++)
        {

            //start print job
            if (OpenPrinter(pParams->wsPrinterName, &hPrinter,
&pd))
            {
                //register to wait for a nova event - wait
                until Pdf is finished
                pNova->RegisterNovaEvent(L
"NOVAPDF_EVENT_START_DOC");
                //get default printer DEVMODE
                int nSize = DocumentProperties(NULL,
hPrinter, pParams->wsPrinterName, NULL, NULL, 0);
                pDevmode = (PDEVMODEW)LocalAlloc(LPTR,
nSize);
                DocumentProperties(NULL, hPrinter,
pParams->wsPrinterName, pDevmode, NULL, DM_OUT_BUFFER);

                //set page size in DEVMODE
                pDevmode->dmPaperSize = DMPAPER_USER;
                pDevmode->dmPaperLength = 2970;//5940;
            }
        }
    }
}

```

```

        pDevmode->dmPaperWidth = 2100;//4200;
        pDevmode->dmFields = DM_PAPERSIZE |
DM_PAPERLENGTH | DM_PAPERWIDTH;
        DocumentProperties(NULL, hPrinter,
pParams->wsPrinterName, pDevmode, pDevmode, DM_IN_BUFFER | DM_OUT_BUFFER);

        //Print a page
        HDC hDC = CreatedDC(L"",
pParams->wsPrinterName, NULL, pDevmode);
        DOCINFO docInfo = {sizeof(DOCINFO)};
        // PDF document name and path
        docInfo.lpszDocName = PDF_FILE_NAME;
        StartDoc(hDC,&docInfo);
        StartPage(hDC);
        // Draw text on page
        TextOut(hDC, 100, 80, PDF_TEXT, (int)
wcslen(PDF_TEXT));

        EndPage(hDC);
        EndDoc(hDC);
        DeleteDC(hDC);
        LocalFree(pDevmode);
        ClosePrinter(hPrinter);
        pNova->WaitForNovaEvent(-1, &bTimeout);
    }
}

//delete profile
pNova->DeleteProfile(pwsNewProfileID);
CoTaskMemFree(pwsNewProfileID);
}
//delete temporary printer
pNova->DeleteNovaPrinter(pParams->wsPrinterName);
}

//release NovaPdfOptions
pNova->Release();
return 0;
}

```

1.5.6.8 Override Options

Override Options sample is a simple Windows console application that demonstrates the basic use of the `INovaPDFOptions` interface, without using profiles options. Instead of creating a profile and setting options in the profile, the sample uses `SetOverrideOptions...` functions to quickly set some options that will overwrite active profile settings. This is useful if you have a simple application where you just wish to change the pdf file name, email address or other simple options for each printed document.

There is a limited set of options that can be set with `SetOverrideOptions...` functions, usually settings that users can also change from the Save As dialog or the other prompt dialogs that can be shown before printing a document. If you need more complex settings, like adding a watermark, overlay or signature you have to configure them in a profile.

You can combine usage of profiles and override options functions. For instance you can create a profile with a watermark that is set as active and then use the override function just to change the file name for each document.

Once set, override options are taken in account for all printed documents until they are removed with `DeleteOverrideOptions` function.

The sample prints one page with a simple text to the novaPDF SDK 10 and generates a "OverrideOptions.pdf" file in the C:\temp folder.

Source code

```
#include "stdafx.h"

//Include novaPDF headers
#include "..\..\..\include\novaOptions.h"
#include "..\..\..\include\novaEvents.h"

//NovaPdfOptions
#include "..\..\..\include\novapi.h"

//name of novaPDF Printer Demo
#define PRINTER_NAME L"novaPDF SDK 9"

//text to be written in the PDF file
#define PDF_TEXT L"Override options sample"

//PDF file name
#define PDF_FILE_NAME L"OverrideOptions.pdf"

int _tmain(int argc, _TCHAR* argv[])
{
    HRESULT hr = S_OK;

    //initialize COM
    hr = CoInitialize(NULL);
    if (FAILED (hr))
    {
        MessageBox(NULL, L"Failed to initialize COM", L"novaPDF",
MB_OK);
        return hr;
    }

    //create one NovaPdfOptions instance
    INovaPdfOptions9 *pNova = 0;
    hr = CoCreateInstance(__uuidof(NovaPdfOptions9), NULL,
CLSCTX_INPROC_SERVER, __uuidof(INovaPdfOptions9), (LPVOID*) &pNova);

    if (FAILED(hr))
    {
```

```

        MessageBox(NULL, L"Failed to create novaPDF COM object", L
"novaPDF", MB_OK);
        return hr;
    }

    // initialize the NovaPdfOptions object to use with a printer
    licensed for SDK
    // if you have an application license for novaPDF SDK,
    // pass the license key to the Initialize() function
    hr = pNova->Initialize(PRINTER_NAME, L"");

    if (SUCCEEDED(hr))
    {
        //Override options from active profile

        //Save options
        //do not show prompt save dialog
        pNova->SetOverrideOptionLong(NOVAPDF_OVERRIDE_SAVE_TYPE,
PROMPT_SAVE_NONE);
        //save the pdf in next folder
        pNova->SetOverrideOptionLong(NOVAPDF_OVERRIDE_SAVE_FOLDER_TYPE,
SAVEFOLDER_CUSTOM);
        pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_SAVE_FOLDER, L
"C:\\temp");
        pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_SAVE_FILE,
PDF_FILE_NAME);
        //access folder, if restricted

        pNova->SetOverrideOptionEncryptedString(NOVAPDF_OVERRIDE_SAVE_USER, L"user"
);

        pNova->SetOverrideOptionEncryptedString(NOVAPDF_OVERRIDE_SAVE_PASSWORD, L
"password");
        //if a file with the same neme already exists
        pNova->SetOverrideOptionLong(NOVAPDF_OVERRIDE_SAVE_CONFLICT,
FILE_CONFLICT_STRATEGY_OVERWRITE);

        //disable open PDF in viewer
        //pNova->SetOverrideOptionBool(NOVAPDF_OVERRIDE_OPEN_VIEWER,
FALSE);

        //Embed fonts
        pNova->SetOverrideOptionBool(NOVAPDF_OVERRIDE_EMBEDFONTS,
TRUE);

        //Set compression level
        //pNova->SetOverrideOptionLong(NOVAPDF_OVERRIDE_COMPRESSION,
COMPRESSION_HIGHQUALITY);

        //Merge PDF
        //Enable merge
        /*
        pNova->SetOverrideOptionBool(NOVAPDF_OVERRIDE_MERGE_PDF, TRUE);

```

```
        //Merge with the same file, if the file exists in destination
OR merge with another file
        pNova->SetOverrideOptionLong(NOVAPDF_OVERRIDE_MERGE_FILE_TYPE,
MERGE_FILE_OTHER);
        //Append to existing PDF, insert at the beginning or insert at
a page number
        pNova->SetOverrideOptionLong(NOVAPDF_OVERRIDE_MERGE_TYPE,
MERGE_TYPE_APPEND);
        //if merge with other file, specify file name (and path)
        pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_MERGE_FILE,
L"invoice-text.pdf");
        //if merge type is set to insert at page number
        //pNova->SetOverrideOptionLong(NOVAPDF_OVERRIDE_INSERT_PAGENO,
1);
        //if the existing PDF is encrypted

//pNova->SetOverrideOptionEncryptedString(NOVAPDF_OVERRIDE_PDF_PASSWORD,
L"password");
    */

    //Document info
    pNova->SetOverrideOptionBool(NOVAPDF_OVERRIDE_DOC_INFO, TRUE);
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_DOC_TITLE, L
"sdk title");
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_DOC_SUBJECT, L
"sdk subject");
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_DOC_AUTHOR, L
"sdk author");
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_DOC_KEY, L"sdk
key");
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_DOC_CREATOR, L
"sdk creator");

    //Encrypt PDF
    /*
    pNova->SetOverrideOptionBool(NOVAPDF_OVERRIDE_SECURITY, TRUE);

    pNova->SetOverrideOptionEncryptedString(NOVAPDF_OVERRIDE_SECURITY_U,
L"user");

    pNova->SetOverrideOptionEncryptedString(NOVAPDF_OVERRIDE_SECURITY_0,
L"owner");
    */

    //Email

    pNova->SetOverrideOptionBool(NOVAPDF_OVERRIDE_SEND_EMAIL,
TRUE);
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_REC_TO, L"to");
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_REC_FROM, L
"from");
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_REC_CC, L"cc");
    pNova->SetOverrideOptionString(NOVAPDF_OVERRIDE_REC_BCC, L"bcc"
```

```

);

//register for evants from novaPDF so we can wait until the
document is printed
pNova->RegisterNovaEvent(NOVAPDF_EVENT_ACTIONS);

HANDLE      hPrinter;
PDEVMODEW   pDevmode = NULL;
PRINTER_DEFAULTS pd = { NULL, NULL, PRINTER_ACCESS_USE };

//start print job
if (OpenPrinter(PRINTER_NAME, &hPrinter, &pd))
{
    //get default printer DEVMODE
    int nSize = DocumentProperties(NULL, hPrinter,
PRINTER_NAME, NULL, NULL, 0);
    pDevmode = (PDEVMODEW)LocalAlloc(LPTR, nSize);
    DocumentProperties(NULL, hPrinter, PRINTER_NAME,
pDevmode, NULL, DM_OUT_BUFFER);

    //set page size in DEVMODE
    pDevmode->dmPaperSize = DMPAPER_USER;
    pDevmode->dmPaperLength = 2970;
    pDevmode->dmPaperWidth = 2100;
    pDevmode->dmFields = DM_PAPERSIZE | DM_PAPERLENGTH |
DM_PAPERWIDTH;
    DocumentProperties(NULL, hPrinter, PRINTER_NAME,
pDevmode, pDevmode, DM_IN_BUFFER | DM_OUT_BUFFER);

    //Print a page
    HDC hDC = CreateDC(L"", PRINTER_NAME, NULL, pDevmode);
    DOCINFO docInfo = {sizeof(DOCINFO)};
    //document name
    docInfo.lpszDocName = PDF_FILE_NAME;
    StartDoc(hDC, &docInfo);
    StartPage(hDC);
    // Draw text on page
    TextOut(hDC, 100, 80, PDF_TEXT, (int) wcslen(PDF_TEXT));
    EndPage(hDC);
    EndDoc(hDC);
    DeleteDC(hDC);

    //print job sent to printer
    MessageBox(NULL, L"Print job finished", L"novaPDF",
MB_OK);

    LocalFree(pDevmode);
    ClosePrinter(hPrinter);
}
else
{
    WCHAR wsMessage[255];

```

```

        wsprintf(wsMessage, L"OpenPrinter failed, error = %d",
GetLastError());
        MessageBox(NULL, wsMessage, L"novaPDF", MB_OK);
    }

    //wait for the document to be finished before printing other
documents
    BOOL bTimeout;
    pNova->WaitForNovaEvent(120000, &bTimeout);

    //remove override options
    pNova->DeleteOverrideOptions();
}

//release NovaPdfOptions
pNova->Release();
CoUninitialize();
return 0;
}

```

1.5.7 Java

1.5.7.1 Hello World

Hello World (Java) sample is a basic Java console application that generates (using the novaPDF SDK 10 printer) one PDF file containing the text "Hello World from Java2!". It demonstrates the basic use of the **INovaPDFOptions** interface with **j-Interop**.

What this sample does:

- determines the active profile, makes a copy of it and names it "Test Java"
- sets the new profile (Test Java) as active as well as some mandatory settings (e.g. the subject of the PDF)
- generates a test PDF file
- restores the original settings of the novaPDF SDK 10 printer driver.

"j-Interop is a Java Open Source library (under LGPL) that implements the DCOM wire protocol (MSRPC) to enable development of Pure, Bi-Directional, Non-Native Java applications which can interoperate with any COM component." j-Interop can be found at <http://www.j-interop.org/>

Note

If you encounter problems or have questions on using j-Interop, visit their FAQ page at <http://www.j-interop.org/faq.html>

Also, to avoid the "Logon failure: unknown user name or bad password" error, configure DCOM for remote access (detailed here -

<http://j-integra.intrinsyc.com/support/com/doc/remoteaccess.html#winxp>) and make sure your firewall is not turned on.

SOURCE CODE OF THE HELLO WORLD JAVA SAMPLE (MAIN.JAVA):

```

package helloworld;

import java.awt.*;
import java.awt.print.*;
import java.net.UnknownHostException;
import java.util.logging.Level;
import javax.print.PrintService;

import org.jinterop.dcom.common.JIException;
import org.jinterop.dcom.common.JISystem;
import org.jinterop.dcom.core.IJICOMObject;
import org.jinterop.dcom.core.JIComServer;
import org.jinterop.dcom.core.JIProgId;
import org.jinterop.dcom.core.JISession;
import org.jinterop.dcom.core.JIString;
import org.jinterop.dcom.core.JIVariant;
import org.jinterop.dcom.impls.JIObjectFactory;
import org.jinterop.dcom.impls.automation.IJIDispatch;

public class Main implements Printable {

    private static String PRINTER_NAME = "novaPDF SDK 9";
    private static String MESSAGE = "Hello world from Java2!";
    public static String PROFILE_NAME = "Test Java";
    public static int PROFILE_IS_PUBLIC = 0;

    public static long NOVAPDF_DOCINFO_SUBJECT = 68;
    public static String NOVAPDF_INFO_SUBJECT = "Java Hello World Document
Subject";

    public static long NOVAPDF_SAVE_FILE_NAME = 104;
    public static long NOVAPDF_SAVE_FILEEXIST_ACTION = 108;
    public static long FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW = 1;
    public static long NOVAPDF_INFO_VIEWER_ENABLE = 8;
    public static long NOVAPDF_SAVE_PROMPT_TYPE = 101;
    public static long PROMPT_SAVE_SIMPLE = 2;
    JIComServer comStub = null;
    IJIDispatch pNovaDispatch = null;
    IJICOMObject pNova = null;

    /**
     * @param args the command line arguments
     */
    public static void main(String[] args) throws JIException,
UnknownHostException {

        if (args.length < 4) {
            System.out.println("Please provide address domain username
password");
            return;
        }
        new Main().doPrint(args);
    }
}

```

```

    public void doPrint(String[] args) throws JIException,
        UnknownHostException {

        //disable J-Interop Log
        try {
            JISystem.getLogger().setLevel(Level.INFO);
            JISystem.setInBuiltLogHandler(false);
        } catch (Exception e) {
            //System.out.println(e.getMessage());
        }

        //connecting to COM/DCOM server
        JISession session = JISession.createSession(args[1], args[2], args[
3]);

        session.useSessionSecurity(true);

        JIProgId pid = JIProgId.valueOf("novapi9.NovaPdfOptions9");
        pid.setAutoRegistration(true);

        comStub = new JIComServer(pid, args[0], session);
        pNova = comStub.createInstance();

        pNovaDispatch = (JIIDispatch) JIObjectFactory.narrowObject(pNova.
            queryInterface(JIIDispatch.IID));
        JIString PRINTER = new JIString(PRINTER_NAME);

        try {
            pNovaDispatch.callMethodA("Initialize2", new Object[]{PRINTER,
            new JIString("")});
            pNovaDispatch.callMethodA("LicenseShellExecuteFile", new Object
            []{new JIString("java")}));
        } catch (JIException except) {
            System.out.println("Initialize/LicenseShellExecuteFile");
            except.printStackTrace();
        }

        String oldActiveProfile = "";

        try {
            JIVariant ap[] = pNovaDispatch.callMethodA("GetActiveProfile2",
            new Object[]{new JIVariant("", true)});
            oldActiveProfile = ap[1].getObjectAsString().getString();
        } catch (JIException except) {
            System.out.println("GetActiveProfile2");
            except.printStackTrace();
        }

        //ADD A NEW PROFILE

        String activeProfile = "";

```

```

        try {
            JIVariant ap[] = pNovaDispatch.callMethodA("AddProfile2", new
Object[]{new JIString(PROFILE_NAME), PROFILE_IS_PUBLIC, new JIVariant("",
true)});
            activeProfile = ap[1].getObjectAsString().getString();
        } catch (JIException except) {
            System.out.println("AddProfile2");
            except.printStackTrace();
        }

        //LOAD PROFILE
        try {
            pNovaDispatch.callMethod("LoadProfile2", new Object[]{new
JIString(activeProfile)});
        } catch (JIException except) {
            System.out.println("LoadProfile2");
            except.printStackTrace();
        }

        //CHANGE SOME OPTIONS
        try {
            // and set some options
            pNovaDispatch.callMethod("SetOptionString2", new Object[]{
NOVAPDF_DOCINFO_SUBJECT, new JIString(NOVAPDF_INFO_SUBJECT)});
            pNovaDispatch.callMethod("SetOptionString2", new Object[]{
NOVAPDF_SAVE_FILE_NAME, new JIString("novaPDFJavaDocument")});
            pNovaDispatch.callMethod("SetOptionLong", new Object[]{
NOVAPDF_SAVE_FILEEXIST_ACTION, FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW});
            pNovaDispatch.callMethod("SetOptionBool", new Object[]{
NOVAPDF_INFO_VIEWER_ENABLE, 1});
            pNovaDispatch.callMethod("SetOptionLong", new Object[]{
NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_SIMPLE});
        } catch (JIException except) {
            System.out.println("Set options");
            except.printStackTrace();
        }

        //SAVE PROFILE
        try {
            pNovaDispatch.callMethod("SaveProfile2");
        } catch (JIException except) {
            System.out.println("SaveProfile2");
            except.printStackTrace();
        }

        //SET IT AS ACTIVE PROFILE
        try {
            // set the copy profile as active profile ...
            pNovaDispatch.callMethod("SetActiveProfile2", new Object[]{new
JIString(activeProfile)});
        } catch (JIException except) {
            System.out.println("SetActiveProfile2");
            except.printStackTrace();
        }

```



```

    }

    //PRINT SOMETHING WITH NEW PROFILE
    PrinterJob job = PrinterJob.getPrinterJob();
    PrintService[] services = PrinterJob.lookupPrintServices();

    Boolean flag = Boolean.FALSE;
    for (int i = 0; i < services.length; i++) {
        if (services[i].getName().equalsIgnoreCase(PRINTER_NAME)) {
            flag = Boolean.TRUE;
            try {
                job.setPrintService(services[i]);
                job.setPrintable(this);
                job.print();
            } catch (Throwable throwable) {
                System.out.println("Printing Exception");
                throwable.printStackTrace();
            }
            break;
        }
    }

    if(flag == Boolean.FALSE){
        System.out.println("Printer not found...");
    }else{
        System.out.println("PDF Printed");
    }

    //RESTORE PREVIOUS ACTIVE PROFILE
    try {
        if(oldActiveProfile.length() > 0) {
            pNovaDispatch.callMethod("SetActiveProfile2", new Object[]{
new JIString(oldActiveProfile)});
        }
    } catch (JIException except) {
        System.out.println("SetActiveProfile2 Old");
        except.printStackTrace();
    }

    //DELETE THE NEW PROFILE

    try {
        pNovaDispatch.callMethod("DeleteProfile2", new Object[]{new
JIString(activeProfile)});
    } catch (JIException except) {
        System.out.println("DeleteProfile2");
        except.printStackTrace();
    }

    JISession.destroySession(session);
}

public int print(Graphics g, PageFormat pf, int page) throws

```

```

PrinterException {
    if (page > 0) { /* We have only one page, and 'page' is zero-based
    */
        return NO_SUCH_PAGE;
    }
    /* User (0,0) is typically outside the imageable area, so we must
    * translate by the X and Y values in the PageFormat to avoid
    clipping
    */
    Graphics2D g2d = (Graphics2D) g;
    g2d.translate(pf.getImageableX(), pf.getImageableY());

    /* Now we perform our rendering */
    g.drawString(MESSAGE, 100, 100);

    /* tell the caller that this page is part of the printed document
    */
    return PAGE_EXISTS;
}
}

```

1.5.7.2 Word OLE

The Word OLE (Java) SDK sample is a basic Java console application that converts a MS Word document (in this sample the default location for the source document is C:\temp\test.doc) to PDF using Word OLE automation and j-Interop.

“j-Interop is a Java Open Source library (under LGPL) that implements the DCOM wire protocol (MSRPC) to enable development of Pure, Bi-Directional, Non-Native Java applications which can interoperate with any COM component.” j-Interop can be found at <http://www.j-interop.org/>

Note

If you encounter problems or have questions on using j-Interop, visit their FAQ page at <http://www.j-interop.org/faq.html>

Also, to avoid the “Logon failure: unknown user name or bad password” error, configure DCOM for remote access (detailed here - <http://j-integra.intrinsyc.com/support/com/doc/remotefaccess.html#winxp>) and make sure your firewall is not turned on.

SOURCE CODE FOR WORD OLE SAMPLE (MAIN.JAVA):

```

package wordole;

import java.io.File;
import java.util.logging.Level;
import org.jinterop.dcom.common.JIException;
import org.jinterop.dcom.common.JISystem;
import org.jinterop.dcom.core.IJICOMObject;
import org.jinterop.dcom.core.JIComServer;
import org.jinterop.dcom.core.JIProgId;

```

```
import org.jinterop.dcom.core.JISession;
import org.jinterop.dcom.core.JIString;
import org.jinterop.dcom.core.JIVariant;
import org.jinterop.dcom.impls.JIObjectFactory;
import org.jinterop.dcom.impls.automation.IJIDispatch;

public class Main {

    public static String PROFILE_NAME = "Test Java and Word OLE";
    public static int PROFILE_IS_PUBLIC = 0;

    public static long NOVAPDF_DOCINFO_SUBJECT = 68;
    public static String NOVAPDF_INFO_SUBJECT = "Java OLE Word Document
Subject";

    public static long NOVAPDF_SAVE_FILE_NAME = 104;
    public static long NOVAPDF_SAVE_FILEEXIST_ACTION = 108;
    public static long FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW = 1;
    public static long NOVAPDF_INFO_VIEWER_ENABLE = 8;
    public static long NOVAPDF_SAVE_PROMPT_TYPE = 101;
    public static long PROMPT_SAVE_SIMPLE = 2;
    /**
     * @param args the command line arguments
     */
    public static void main(String[] args) {

        if (args.length < 4) {
            System.out.println("Please provide address domain username
password");
            return;
        }
        File docFile = new File("c:\\temp\\test.doc");
        if (!docFile.exists()) {
            System.out.println("c:\\temp\\test.doc file does not exist");
            return;
        }

        //disable J-Interop Log
        try {
            JISystem.getLogger().setLevel(Level.INFO);
            JISystem.setInBuiltLogHandler(false);
        } catch (Exception e) {
            //System.out.println(e.getMessage());
        }

        JIComServer comStub = null;
        IJIDispatch pNovaDispatch = null;
        IJIComObject unknown = null;

        try {
            JISession session = JISession.createSession(args[1], args[2],
args[3]);
            session.useSessionSecurity(true);
```

```

        JIProgId pid = JIProgId.valueOf("novapi9.NovaPdfOptions9");
        pid.setAutoRegistration(true);

        comStub = new JIComServer(pid, args[0], session);
        unknown = comStub.createInstance();

        pNovaDispatch = (IJIIDispatch) JIObjectFactory.narrowObject(
unknown.queryInterface(IJIIDispatch.IID));

        //INITIALIZE

        JIString PRINTER = new JIString("novaPDF SDK 9");
        JIString APPNID = new JIString("Word.Application");
        pNovaDispatch.callMethod("Initialize2", new Object[]{PRINTER,
new JIString("")});

        //GET ACTIVE PROFILE

        String oldActiveProfile = "";

        try {
            JIVariant ap[] = pNovaDispatch.callMethodA(
"GetActiveProfile2", new Object[]{new JIVariant("", true)});
            oldActiveProfile = ap[1].getObjectAsString().getString();
        } catch ( JIException except ) {
            System.out.println("GetActiveProfile2");
            except.printStackTrace() ;
        }

        String activeProfile = "";

        //ADD A NEW PROFILE
        try {
            JIVariant ap[] = pNovaDispatch.callMethodA("AddProfile2",
new Object[]{new JIString(PROFILE_NAME), PROFILE_IS_PUBLIC, new JIVariant(
"", true)});
            activeProfile = ap[1].getObjectAsString().getString();
        } catch (JIException except) {
            System.out.println("AddProfile2");
            except.printStackTrace();
        }

        //LOAD PROFILE
        try {
            pNovaDispatch.callMethod("LoadProfile2", new Object[]{new
JIString(activeProfile)});
        } catch (JIException except) {
            System.out.println("LoadProfile2");
            except.printStackTrace();
        }

        //CHANGE SOME OPTIONS

```

```

        try {
            // and set some options
            pNovaDispatch.callMethod("SetOptionString2", new Object[]{
NOVAPDF_DOCINFO_SUBJECT, new JIString(NOVAPDF_INFO_SUBJECT)});
            pNovaDispatch.callMethod("SetOptionString2", new Object[]{
NOVAPDF_SAVE_FILE_NAME, new JIString("novaPDFJavaDocument")});
            pNovaDispatch.callMethod("SetOptionLong", new Object[]{
NOVAPDF_SAVE_FILEEXIST_ACTION, FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW});
            pNovaDispatch.callMethod("SetOptionBool", new Object[]{
NOVAPDF_INFO_VIEWER_ENABLE, 1});
            pNovaDispatch.callMethod("SetOptionLong", new Object[]{
NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_SIMPLE});
        } catch (JIException except) {
            System.out.println("Set options");
            except.printStackTrace();
        }

        //SAVE PROFILE
        try {
            pNovaDispatch.callMethod("SaveProfile2");
        } catch (JIException except) {
            System.out.println("SaveProfile2");
            except.printStackTrace();
        }

        //SET IT AS ACTIVE PROFILE
        try {
            // set the copy profile as active profile ...
            pNovaDispatch.callMethod("SetActiveProfile2", new Object[]{
new JIString(activeProfile)});
        } catch (JIException except) {
            System.out.println("SetActiveProfile2");
            except.printStackTrace();
        }
        //InitializeOLEUsage("Word.Application");
        pNovaDispatch.callMethod("InitializeOLEUsage", new Object[]{
APPNID});

        pNovaDispatch.callMethod("LicenseOLEServer");

        MSWord word = new MSWord(args[0], args, pNovaDispatch, PRINTER
    );

        word.startWord();
        word.showWord();

        word.performOp();
        word.quitAndDestroy();

        //RESTORE PREVIOUS ACTIVE PROFILE
        try {
            if(oldActiveProfile.length() > 0) {
                pNovaDispatch.callMethod("SetActiveProfile2", new
Object[]{new JIString(oldActiveProfile)});
            }
        }

```

```

        } catch (JException except) {
            System.out.println("SetActiveProfile2 Old");
            except.printStackTrace();
        }

        //DELETE THE NEW PROFILE

        try {
            pNovaDispatch.callMethod("DeleteProfile2", new Object[]{new
JIStrng(activeProfile)});
        } catch (JException except) {
            System.out.println("DeleteProfile2");
            except.printStackTrace();
        }
        System.out.println("Done!");

    } catch (Exception e) {
        System.out.println("---UPS---");
        e.printStackTrace();
    }
}
}
}

```

SOURCE CODE FOR WORD OLE SAMPLE (MSWORD.JAVA):

```

package wordole;
/*
 * j-interop can be found at http://www.j-interop.org/
 * and it is an open source project
 */
import java.net.UnknownHostException;
import org.jinterop.dcom.common.JException;
import org.jinterop.dcom.common.JISystem;
import org.jinterop.dcom.core.IJComObject;
import org.jinterop.dcom.core.JIComServer;
import org.jinterop.dcom.core.JIProgId;
import org.jinterop.dcom.core.JISession;
import org.jinterop.dcom.core.JIStrng;
import org.jinterop.dcom.core.JIVariant;
import org.jinterop.dcom.impls.JIObjectFactory;
import org.jinterop.dcom.impls.automation.IJIDispatch;

public class MSWord {

    private JIComServer comStub = null;

    private IJIDispatch dispatch = null;

    private IJComObject unknown = null;

    private IJIDispatch PDF = null;

```

```

        private JIString PRINTER = null;

        public MSWord(String address, String[] args, IJIDispatch PDF,
            JIString PRINTER) throws JIException, UnknownHostException {

            this.PDF = PDF;
            this.PRINTER = PRINTER;

            JISession session = JISession.createSession(args[1], args[2],
args[3]);
            session.useSessionSecurity(true);
            comStub = new JIComServer(JIProgId.valueOf("Word.Application"),
address, session);
        }

        public void startWord() throws JIException {
            unknown = comStub.createInstance();
            dispatch = (IJIDispatch) JIObjectFactory.narrowObject(unknown.
queryInterface(IJIDispatch.IID));
        }

        public void showWord() throws JIException {
            int dispId = dispatch.getIdsOfNames("Visible");
            JIVariant variant = new JIVariant(Boolean.FALSE);
            dispatch.put(dispId, variant);
            PDF.callMethod("LicenseOLEServer");
        }

        public void performOp() throws JIException, InterruptedException {

            /* JISystem config *
            *
            */
            JISystem.setJavaCoClassAutoCollection(true);

            System.out.println(((JIVariant) dispatch.get("Version")).
getObjectAsString().getString());
            System.out.println(((JIVariant) dispatch.get("Path")).
getObjectAsString().getString());
            JIVariant variant = dispatch.get("Documents");

            System.out.println("Open document...");
            IJIDispatch documents = (IJIDispatch) JIObjectFactory.
narrowObject(variant.getObjectAsComObject());
            JIString filePath = new JIString("c:\\temp\\test.doc");
            JIVariant variant2[] = documents.callMethodA("open", new Object
[] { filePath, JIVariant.OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM(),
JIVariant.OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM(), JIVariant.
OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM(),
JIVariant.OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM(), JIVariant.
OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM(),

```

```

JIVariant.OPTIONAL_PARAM() , JIVariant.OPTIONAL_PARAM() });

    System.out.println("doc opened");
    //ActivePrinter
    dispatch.put("ActivePrinter", new Object[]{PRINTER});

    sleep(5);
    System.out.println("Get content...");
    IJIDispatch document = (IJIDispatch) JIObjectFactory.
narrowObject(variant2[0].getObjectAsComObject());

    sleep(5);
    System.out.println("Printing...");
    document.callMethod("PrintOut", new Object[] {1});

    System.out.println("Closing document...");
    document.callMethod("Close");

}

private void sleep(int sec) throws InterruptedException {
    System.out.println("Sleeping "+sec+" second(s)...");
    Thread.sleep( (int)(sec * 1000) );
}

/**
 * @throws JIException
 */
public void quitAndDestroy() throws JIException {
    System.out.println("Quit...");
    dispatch.callMethod("Quit", new Object[] { new JIVariant(-1,
true), JIVariant.OPTIONAL_PARAM(), JIVariant.OPTIONAL_PARAM() });
    JISession.destroySession(dispatch.getAssociatedSession());
}

}

```

1.5.8 VB

1.5.8.1 Hello World VB

Hello World VB sample is a simple Windows console application that prints one page with the "novaPDF says Hello World from VB" text to the novaPDF SDK 10.

It demonstrates the basic use of the INovaPDFOptions interface. The printing job is made with calls to the global Printer object defined by VB.

It generates a "HelloWorld.pdf" file and opens it in the default PDF viewer.

Notice

If you print an existing document using "ShellExecute()" function or you want to handle printing events, you should check the VB Converter sample instead.

Source code


```
' the novapiLib and novapiLibDemo packages must be added as a COM reference
Const PRINTER_NAME As String = "novaPDF SDK 9"
Const PROFILE_NAME As String = "Test VB"
Const PROFILE_IS_PUBLIC As Long = 0

' The main entry point for the application.
Public Sub Main()
    On Error GoTo ErrorHandler:

    ' create the NovaPdfOptions object
    Dim pNova As New NovaPdfOptions9
    Dim sOldActiveProfileID As String
    Dim sNewProfileID As String

    ' initialize the NovaPdfOptions object to use with a printer licensed
for SDK
    pNova.Initialize2 (PRINTER_NAME) ""

    pNova.GetActiveProfile2 (sOldActiveProfileID)
    On Error Resume Next

    ' make new profile
    pNova.AddProfile2 PROFILE_NAME, PROFILE_IS_PUBLIC, sNewProfileID
    pNova.LoadProfile2 (sNewProfileID)
    ' and set some options
    ' uncomment the function calls for the options you wish to set and
change the options in the Nova.vb unit
    '-----
    AddProfileOptions (pNova)
    AddDocumentInformation (pNova)
    AddViewerOptions (pNova)
    AddLinksOptions (pNova)
    AddAdvancedOptions (pNova)
    AddGraphicsOptions (pNova)
    AddEmbedFontsOptions (pNova)
    AddBookmarksDefinitions (pNova)
    AddSecurity (pNova)
    AddSaveOptions (pNova)
    AddAfterSaveActions (pNova)
    AddEmailOptions (pNova)
    AddWatermarkImage (pNova)
    AddWatermarkText (pNova)
    AddPageContentOptions (pNova)
    AddOverlayOptions (pNova)
    AddSignatureOptions (pNova)
    '-----
    'save profile changes
    pNova.SaveProfile
    'set as active profile for printer
    pNova.SetActiveProfile (sNewProfileID)

    ' Print a test page
```

```

    Dim myPrinter As Printer

    For Each myPrinter In Printers
        If myPrinter.DeviceName = PRINTER_NAME Then
            Set Printer = myPrinter
            Exit For
        End If
    Next

    Printer.FontName = "Arial"
    Printer.FontSize = 16
    Printer.CurrentX = 20
    Printer.CurrentY = 20

    Printer.Print "novaPDF says Hello World from VB"
    Printer.EndDoc

    'restore default profile
    If Len(sOldActiveProfileID) > 0 Then
        pNova.SetActiveProfile2 (sOldActiveProfileID)
    End If

    'delete newly created profile
    pNova.DeleteProfile2 (sNewProfileID)

Exit Sub
ErrorHandler:
    Debug.Print (Err.Number & ":" & Err.Description)
End Sub

```

1.5.8.2 VB Converter

The **VB Converter** sample demonstrates how to convert an existing file by printing it to novaPDF SDK 10 using the ShellExecute function. It also demonstrates how to set different options and manage profiles.

The same approach should be taken if you print using a "Print()" method from another object (like an internet browser or a report control). Just replace the ShellExecute call with the call of your Print method.

When the application starts, it creates a few profiles and makes different settings in the profiles. Then it shows a dialog from where the user can select the active profile and change its settings using the controls from the dialog.

After that a document can be selected from the haddisk and printed to novaPDF SDK 10 using the ShellExecute function call.

When using this technique to convert a file to PDF, you have to take care of the fact that ShellExecute prints to the default printer. This function returns immediately and does not wait until the print is finished (it may return before the printing is actually started). Therefore you have to set the default printer to novaPDF SDK 10 before calling ShellExecute (using the

SetDefaultPrinter method), register FileSaved message (or any other novaPDF SDK 10 message) to be sure that the print job was started. In this message handler restore the default printer (with the RestoreDefaultPrinter method). This way you made sure that the default printer was restored and your document is printed to novaPDF SDK 10.

Source code snippets

1. Declare INovaPdfOptions variable

```
'create the NovaPdfOptions object
Public m_NovaOptions As New NovaPdfOptions9
```

2. Register novaPDF SDK 10 messages

```
Public wm_Nova_FileSaved As Long
Public wm_Nova_PrintError As Long

Sub Main()
    ' Registering the messages send by the print in order to listen for
    them
    wm_Nova_FileSaved = RegisterWindowMessage(MSG_NOVAPDF2_FILESAVED)
    wm_Nova_PrintError = RegisterWindowMessage(MSG_NOVAPDF2_PRINTERROR)
    Form1.Show
End Sub

' Sub that will handle the windows messages
Public Function VB_WindowProc(ByVal hwnd As Long, ByVal wParam As Long, ByVal lParam As Long) As Long
    ' For the registered messages perform specific tasks
    If wParam = wm_Nova_FileSaved Then
        OnNovaPDFFileSaved wParam, lParam
        Exit Function
    End If
    If wParam = wm_Nova_PrintError Then
        OnNovaPDFPrintError wParam, lParam
        Exit Function
    End If

    ' For other messages just send them via normal (old) handling process
    VB_WindowProc = CallWindowProc(oldHandler, hwnd, wParam, lParam)
End Function
```

3. Initialize INovaPdfOptions

```
Private Sub Form_Load()

    On Error GoTo ErrorHandler:
    Dim strProfileID As String
    Dim strProfileName As String
    Dim strActiveProfileID As String
    Dim nPublicProfile As Long
    Dim nActivePublicProfile As Long

    ' initialize the NovaPdfOptions object to use with a printer licensed
    for SDK
```

```

        m_NovaOptions.Initialize (PRINTER_NAME, "")

        ' sets the value of the windows messages handler to VB_WindowProc and
        sets the old handler address of function in oldHandler
        oldHandler = SetWindowLongApi(Me.hwnd, GWL_WNDPROC, AddressOf
        VB_WindowProc)

        cmbProfiles.Clear

        Call AddSmallSize
        Call AddFullOptions

        ' get the active profile ...
        m_NovaOptions.GetActiveProfile2 strActiveProfileID

        m_NovaOptions.GetFirstProfile2 strProfileID
        m_NovaOptions.LoadProfile2 strProfileID
        m_NovaOptions.GetOptionString2 NOVAPDF_PROFILE_NAME, strProfileName
        cmbProfiles.AddItem (strProfileName)

    On Error Resume Next
    Do
        m_NovaOptions.GetNextProfile2 (strProfileID)
        If err.Number = NV_NO_MORE_PROFILES Then
            Exit Do
        End If
        m_NovaOptions.LoadProfile2 strProfileID
        m_NovaOptions.GetOptionString2 NOVAPDF_PROFILE_NAME, strProfileName
        cmbProfiles.AddItem (strProfileName)
    Loop While True

    On Error GoTo ErrorHandler:

    cmbProfiles.ListIndex = 0

    UpdateDialogFromProfile
    Exit Sub
ErrorHandler:
    Debug.Print err.Number & ":" & err.Description
End Sub

4. Set novaPDF SDK 10 Options
Private Sub AddSmallSize()
    Dim strProfileID As String
    On Error GoTo ErrorHandler

    m_NovaOptions.AddProfile2 SMALL_SIZE_PROFILE, PROFILE_IS_PUBLIC,
    strProfileID
    m_NovaOptions.LoadProfile2 (strProfileID)

    ' Set some options to this profile

    ' disable the "Save PDF file as" prompt

```

```

        m_NovaOptions.SetOptionLong2 NOVAPDF_SAVE_PROMPT_TYPE, PROMPT_SAVE_NONE
        ' set generated Pdf files destination folder "c:\"
        m_NovaOptions.SetOptionString2 NOVAPDF_SAVE_FOLDER, "c:\"
        ' set output file name
        m_NovaOptions.SetOptionString2 NOVAPDF_SAVE_FILE_NAME, "PDF Converter
small size.pdf"
        ' if file exists in the destination folder, append a counter to the end
of the file name
        m_NovaOptions.SetOptionLong2 NOVAPDF_SAVE_FILEEXIST_ACTION,
FILE_CONFLICT_STRATEGY_AUTONUMBER_NEW
        ' don't detect URLs
        m_NovaOptions.SetOptionLong2 NOVAPDF_URL_ANALIZE, False

        ' Set image compression method to JPEG and quality to 75, possible
values are from 10 to 100
        m_NovaOptions.SetOptionLong2 NOVAPDF_COMPRESS_ENABLE, True
        m_NovaOptions.SetOptionLong2 NOVAPDF_COMPRESS_HIGH_COLOR, True
        m_NovaOptions.SetOptionLong2 NOVAPDF_COMPRESS_HIGH_COLOR_TYPE,
COMPRESS_METHOD_JPEG
        m_NovaOptions.SetOptionLong2 NOVAPDF_COMPRESS_HIGH_COLOR_LEVEL, 75

        ' make sure text compression is enabled, and set compression level to 9
maximum possible values are 1-9
        m_NovaOptions.SetOptionLong2 NOVAPDF_COMPRESS_TEXT_GRAPHICS, True
        m_NovaOptions.SetOptionLong2 NOVAPDF_COMPRESS_TEXT_GRAPHICS_LEVEL, 9

        ' disable unused font embedding
        m_NovaOptions.SetOptionLong2 NOVAPDF_FONTS_EMBED_ALL_USED_FONTS, False

        'save profile changes
        m_NovaOptions.SaveProfile

Exit Sub
ErrorHandler:
    If err.Number <> NV_PROFILE_EXISTS Then Debug.Print err.Number & ":" &
err.Description

End Sub

```

5. Start a Print job

```

Private Sub btnStartPrinting_Click()
.....
    m_NovaOptions.SetActiveProfile2 (strProfileID)
    m_NovaOptions.SetDefaultPrinter
    Dim strToExecute As String
    Dim r As Long
    m_NovaOptions.RegisterEventWindow Me.hwnd
    m_NovaOptions.LicenseShellExecuteFile txtFileToConvert
    r = ShellExecute(Me.hwnd, "print", txtFileToConvert, "", "", SW_HIDE)
    btnStartPrinting.Enabled = True
.....
End Sub

```

6. Restore default printer when printing finished

```
Private Sub OnNovaPDFFileSaved(wParam As Long, lParam As Long)
    m_NovaOptions.UnRegisterEventWindow
    m_NovaOptions.RestoreDefaultPrinter
End Sub

Private Sub OnNovaPDFPrintError(wParam As Long, lParam As Long)
    Select Case wParam
        Case ERROR_MSG_TEMP_FILE:
            MsgBox "Error saving temporary file on printer server",
vbOKOnly, "novaPDF"
        Case ERROR_MSG_LIC_INFO:
            MsgBox "Error reading license information", vbOKOnly, "novaPDF"
        Case ERROR_MSG_SAVE_PDF:
            MsgBox "Error saving PDF file", vbOKOnly, "novaPDF"
        Case ERROR_MSG_JOB_CANCELED:
            MsgBox "Print job was canceled", vbOKOnly, "novaPDF"
    End Select
    m_NovaOptions.UnRegisterEventWindow
    m_NovaOptions.RestoreDefaultPrinter
End Sub
```

1.5.8.3 Word OLE VB

The **Word OLE VB** sample is a simple Windows console application that converts a MS Word document (C:\Test.doc) to PDF using Word OLE automation.

Source code

```
Attribute VB_Name = "Module1"
Private Declare Sub Sleep Lib "kernel32" (ByVal dwMilliseconds As Long)

' the novapiLib and novapiLibDemo packages must be added as a COM reference
Const PRINTER_NAME As String = "novaPDF SDK 9.0.906"
Const PROFILE_NAME As String = "VB Word OLE"
Const PROFILE_IS_PUBLIC As Long = 0

' The main entry point for the application.
Public Sub Main()
    On Error GoTo ErrorHandler:

    ' create the NovaPdfOptions object
    Dim pNova As New NovaPdfOptions9
    Dim sOldActiveProfileID As String
    Dim sNewProfileID As String

    ' initialize the NovaPdfOptions object to use with a printer licensed
for SDK
    pNova.Initialize2 (PRINTER_NAME, "")

    pNova.GetActiveProfile2 (sOldActiveProfileID)
```

```

' create new profile
On Error Resume Next
pNova.AddProfile2 PROFILE_NAME, PROFILE_IS_PUBLIC, sNewProfileID
pNova.LoadProfile2 (sNewProfileID)
' and set some options
pNova.SetOptionString2 NOVAPDF_DOCINFO_SUBJECT, "Test OLE document"
'save profile changes
pNova.SaveProfile
'set as active profile for printer
pNova.SetActiveProfile (sNewProfileID)

' set nova default printer
pNova.SetDefaultPrinter
' print word document
Dim objWord As Object
Dim objDoc As Object
pNova.InitializeOLEUsage "Word.Application"
Set objWord = CreateObject("Word.Application")
pNova.LicenseOLEServer
Set objDoc = objWord.Documents.Open("C:\Test.doc", False, True)
objDoc.PrintOut False
objDoc.Close False
objWord.Quit False
' restore default printer
pNova.RestoreDefaultPrinter
'restore default profile
If Len(sOldActiveProfileID) > 0 Then
    pNova.SetActiveProfile2 (sOldActiveProfileID)
End If
'delete newly created profile
pNova.DeleteProfile2 (sNewProfileID)

Exit Sub
ErrorHandler:
    Debug.Print Err.Number & ":" & Err.Description
End Sub

```

1.5.8.4 Override Options

Override Options sample is a simple Windows console application that demonstrates the basic use of the `INovaPDFOptions` interface, without using profiles options. Instead of creating a profile and setting options in the profile, the sample uses `SetOverrideOptions...` functions to quickly set some options that will overwrite active profile settings. This is useful if you have a simple application where you just wish to change the pdf file name, email address or other simple options for each printed document.

There is a limited set of options that can be set with `SetOverrideOptions...` functions, usually settings that users can also change from the Save As dialog or the other prompt dialogs that can be shown before printing a document. If you need more complex settings, like adding a watermark, overlay or signature you have to configure them in a profile.

You can combine usage of profiles and override options functions. For instance you can create a

profile with a watermark that is set as active and then use the override function just to change the file name for each document.

Once set, override options are taken in account for all printed documents until they are removed with `DeleteOverrideOptions` function.

The sample prints one page with a simple text to the novaPDF SDK 10 and generates a "OverrideOptions.pdf" file in the C:\temp folder.

Source code

```
Attribute VB_Name = "Module1"
' the novapiLib and novapiLibDemo packages must be added as a COM reference
Const PRINTER_NAME As String = "novaPDF SDK 9"
Const PDF_FILE_NAME As String = "OverrideOptions.pdf"

' The main entry point for the application.
Public Sub Main()
    On Error GoTo ErrorHandler:

    ' create the NovaPdfOptions object
    Dim pNova As New NovaPdfOptions9

    ' initialize the NovaPdfOptions object to use with a printer licensed for SDK
    pNova.Initialize2 PRINTER_NAME, ""

    On Error GoTo ErrorHandler:

    'Override options from active profile

    'Save options
    'do not show prompt save dialog
    pNova.SetOverrideOptionLong NOVAPDF_OVERRIDE_SAVE_TYPE, PROMPT_SAVE_NONE
    'save the pdf in next folder
    pNova.SetOverrideOptionLong NOVAPDF_OVERRIDE_SAVE_FOLDER_TYPE, SAVEFOLDER_CUSTOM
    pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_SAVE_FOLDER, "C:\\temp"
    pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_SAVE_FILE, PDF_FILE_NAME
    'access folder, if restricted
    pNova.SetOverrideOptionEncryptedString2 NOVAPDF_OVERRIDE_SAVE_USER, "user"
    pNova.SetOverrideOptionEncryptedString2 NOVAPDF_OVERRIDE_SAVE_PASSWORD, "password"
    'if a file with the same name already exists
    pNova.SetOverrideOptionLong NOVAPDF_OVERRIDE_SAVE_CONFLICT,
    FILE_CONFLICT_STRATEGY_OVERWRITE

    'disable open PDF in viewer
    'pNova.SetOverrideOptionBool NOVAPDF_OVERRIDE_OPEN_VIEWER, 0

    'Embed fonts
    pNova.SetOverrideOptionBool NOVAPDF_OVERRIDE_EMBEDFONTS, 1

    'Set compression level
    pNova.SetOverrideOptionLong NOVAPDF_OVERRIDE_COMPRESSION, COMPRESSION_HIGHQUALITY

    'Merge PDF
```



```

'Enable merge

'pNova.SetOverrideOptionBool NOVAPDF_OVERRIDE_MERGE_PDF, 1
'Merge with the same file, if the file exists in destination OR merge with another
file
'pNova.SetOverrideOptionLong NOVAPDF_OVERRIDE_MERGE_FILE_TYPE, MERGE_FILE_OTHER
'Append to existing PDF, insert at the beginning or insert at a page number
'pNova.SetOverrideOptionLong NOVAPDF_OVERRIDE_MERGE_TYPE, MERGE_TYPE_APPEND
'if merge with other file, specify file name (and path)
'pNova.SetOverrideOptionString NOVAPDF_OVERRIDE_MERGE_FILE, "invoice-text.pdf"
'if merge type is set to insert at page number
'pNova.SetOverrideOptionLong NOVAPDF_OVERRIDE_INSERT_PAGENO, 1
'if the existing PDF is encrypted
'pNova.SetOverrideOptionEncryptedString2 NOVAPDF_OVERRIDE_PDF_PASSWORD, "password"

'Document info
pNova.SetOverrideOptionBool NOVAPDF_OVERRIDE_DOC_INFO, 1
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_DOC_TITLE, "sdk title"
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_DOC_SUBJECT, "sdk subject"
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_DOC_AUTHOR, "sdk author"
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_DOC_KEY, "sdk key"
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_DOC_CREATOR, "sdk creator"

'Encrypt PDF

'pNova.SetOverrideOptionBool NOVAPDF_OVERRIDE_SECURITY, 1
'pNova.SetOverrideOptionEncryptedString2 NOVAPDF_OVERRIDE_SECURITY_U, "user"
'pNova.SetOverrideOptionEncryptedString2 NOVAPDF_OVERRIDE_SECURITY_O, "owner"

'Email
pNova.SetOverrideOptionBool NOVAPDF_OVERRIDE_SEND_EMAIL, 1
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_REC_TO, "to"
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_REC_FROM, "from"
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_REC_CC, "cc"
pNova.SetOverrideOptionString2 NOVAPDF_OVERRIDE_REC_BCC, "bcc"

' Print a test page
Dim myPrinter As Printer

For Each myPrinter In Printers
    If myPrinter.DeviceName = PRINTER_NAME Then
        Set Printer = myPrinter
        Exit For
    End If
Next

Printer.FontName = "Arial"
Printer.FontSize = 16
Printer.CurrentX = 20
Printer.CurrentY = 20

Printer.Print "novaPDF says Hello World from VB"
Printer.EndDoc

Exit Sub
ErrorHandler:

```

```

        Debug.Print (Err.Number & ":" & Err.Description)
End Sub

```

1.5.9 VBNet

1.5.9.1 Hello World VBNet

Hello World VBNet sample is a simple Windows console application that prints one page with the "novaPDF says Hello World from VB.Net" text to the novaPDF SDK 10.

It demonstrates the basic use of the INovaPDFOptions interface. The printing job is made using the package "System.Drawing.Printing"

Basically the sample determines the active profile, makes a copy of it into a profile called "Test VBNet", sets the new profile as active, sets the subject of the generated PDF document, prints a page, and restores original printer settings. The location of the generated document depends on whatever the settings are for the current active profile.

Notice

Because of the specific exception based error handling in .NET, all calls to methods in the INovaPDFOptions interface must be nested within a try-catch block. Consider for example that we want to add a profile called "test", but the profile "test" already exists. Then the call `pNova.AddProfile("test")` will throw an "System.Runtime.InteropServices.COMException". with the `ErrorCode` property set to `NV_PROFILE_EXISTS (0xD5DA0006)`.

Source code

```

Imports System
Imports System.Drawing
Imports System.Drawing.Printing
Imports System.Windows.Forms
' the novapiLib package must be added as a COM reference
Imports novapiLib80

Module Module1
    ' <summary>
    ' The main entry point for the application.
    ' </summary>
    Const PRINTER_NAME As String = "novaPDF SDK 9"

    Const PROFILE_NAME As String = "Test VBNet"
    Const PROFILE_IS_PUBLIC As Integer = 0
    Const NOVAPDF_INFO_SUBJECT As String = "Document Subject"

    Const NV_PROFILE_EXISTS As Long = -707133434

    Sub Main()
        Try

```

```

        ' create the NovaPdfOptions object
Dim pNova As NovaPdfOptions9
pNova = New NovaPdfOptions9
        ' initialize the NovaPdfOptions object
        ' if you have an application license for novaPDF SDK,
pNova.Initialize(PRINTER_NAME)
        ' mark start changing options
        ' get the active profile ...
        Dim activeProfile As String = ""
Dim nActivePublic As Integer = 0
Try
    pNova.GetActiveProfile(activeProfile)
Catch ex As System.Runtime.InteropServices.COMException
    ' ignore profile exists error
    If (NovaErrors.NV_NO_ACTIVE_PROFILE = ex.ErrorCode) Then
        System.Console.WriteLine("The printer does not have an
active profile")
    Else
        'more serious error, propagate it
        Throw ex
    End If
End Try

Dim newProfileID As String = ""
Try
    ' and make a copy of it
    pNova.AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
newProfileID)
Catch e As System.Runtime.InteropServices.COMException
    ' ignore profile exists error
    If (NV_PROFILE_EXISTS = e.ErrorCode) Then
        System.Console.WriteLine("Profile already
exists")
    Else
        ' more serious error, propagate it
        Throw e
    End If
End Try

'load the new profile
pNova.LoadProfile(newProfileID)
'nova.NovaTools.AddProfileOptions(pNova);

' and set some options
' uncomment the function calls for the options you wish to set
' change the options in the nova.cs unit
'nova.NovaTools.AddProfileOptions(pNova);
'nova.NovaTools.AddDocumentInformation(pNova);
'nova.NovaTools.AddViewerOptions(pNova);
'nova.NovaTools.AddLinksOptions(pNova);
'nova.NovaTools.AddAdvancedOptions(pNova);
'nova.NovaTools.AddGraphicsOptions(pNova);
'nova.NovaTools.AddSecurityOptions(pNova);

```

```

'nova.NovaTools.AddSaveOptions(pNova);
'nova.NovaTools.AddAfterSaveActions(pNova);
'nova.NovaTools.AddEmailOptions(pNova);
'nova.NovaTools.AddWatermarkImage(pNova);
'nova.NovaTools.AddWatermarkText(pNova);
'nova.NovaTools.AddPageContentOptions(pNova);
'nova.NovaTools.AddOverlayOptions(pNova);
'nova.NovaTools.AddSignatureOptions(pNova);
'nova.NovaTools.AddEmbedFontsOptions(pNova);
'nova.NovaTools.AddBookmarksDefinitions(pNova);

'save the new added profile
pNova.SaveProfile()
' set the copy profile as active profile ...
pNova.SetActiveProfile(newProfileID)

' print a test page, using the previously set active
profile settings
Dim pd As PrintDocument = New PrintDocument
pd.PrinterSettings.PrinterName = PRINTER_NAME
AddHandler pd.PrintPage, AddressOf PrintPageFunction
pd.Print()
If ((activeProfile.Length > 0) And
(activeProfile.CompareTo(PROFILE_NAME) <> 0)) Then
    pNova.SetActiveProfile(activeProfile)
    pNova.DeleteProfile(newProfileID)
End If
Catch e As System.Runtime.InteropServices.COMException
    MessageBox.Show(e.Message)
Catch e As Exception
    MessageBox.Show(e.Message)
End Try
End Sub

' and finally the function that actually prints the page
Private Sub PrintPageFunction(ByVal sender As Object, ByVal ev As
PrintPageEventArgs)
    Dim str As String = "novaPDF says Hello World from VB.Net"
    Dim font As Font = New Font("Arial", 16)
    Dim brush As Brush = New SolidBrush(Color.Black)
    ev.Graphics.DrawString(str, font, brush, 20.0!, 20.0!)
    ev.HasMorePages = False
End Sub

End Module

```

1.5.9.2 VBNet Converter

The VBNet Converter sample demonstrates how to convert an existing file by printing it to novaPDF SDK 10 using the ShellExecute function. It also demonstrates how to set different options and manage profiles.

The same approach should be taken if you print using a "Print()" method from another object (like

an internet browser or a report control). Just replace the ShellExecute call with the call of your Print method.

When the application starts, it creates a few profiles and makes different settings in the profiles. Then it shows a dialog from where the user can select the active profile and change its settings using the controls from the dialog.

After that a document can be selected from the harddisk and printed to novaPDF SDK 10 using the ShellExecute function call.

When using this technique to convert a file to PDF, you have to take care of the fact that ShellExecute prints to the default printer. This function returns immediately and does not wait until the print is finished (it may return before the printing is actually started). Therefore you have to set the default printer to novaPDF SDK 10 before calling ShellExecute (using the SetDefaultPrinter method), wait the process to be started (using WaitForExit()), restore the default printer (with the RestoreDefaultPrinter method). This way you made sure that the default printer was restored and your document is printed to novaPDF SDK 10.

Source code snippets

1. Declare INovaPdfOptions variable

```
Private mobjNovaOptios As NovaPdfOptions80Class
```

2. Initialize INovaPdfOptions

```
mobjNovaOptios = New NovaPdfOptions80Class
```

```
' initialize the NovaPdfOptions object  
mobjNovaOptios.Initialize(PRINTER_NAME)
```

```
AddSmallProfile()  
AddFullProfile()
```

3. Set novaPDF SDK 10 Options

```
Try  
    Dim newSmallSizeProfileId As String = ""  
    ' add new profile  
    mobjNovaOptios.AddProfile(SMALL_SIZE_PROFILE,  
PROFILE_IS_PUBLIC, newSmallSizeProfileId)  
  
    'load the new profile  
    mobjNovaOptios.LoadProfile(newSmallSizeProfileId)  
  
    ' Set some options to this profile  
    ' disable the "Save PDF file as" prompt  
  
mobjNovaOptios.SetOptionLong(NovaOptions.NOVAPDF_SAVE_PROMPT_TYPE, 0)  
    ' set generated Pdf files destination folder "c:\"  
  
mobjNovaOptios.SetOptionString(NovaOptions.NOVAPDF_SAVE_FOLDER, "c:\\")
```

```

// .....

Catch ComException As System.Runtime.InteropServices.COMException
    MessageBox.Show("Error creating Small Size Profile:" &
        Microsoft.VisualBasic.Chr(13) & "" & Microsoft.VisualBasic.Chr(10) & "" +
        ComException.Message)
    System.Diagnostics.Debug.WriteLine(ComException.Message)
End Try

```

4. Start a Print job

```

Private Sub btnStartPrinting_Click(ByVal sender As System.Object, ByVal e
As System.EventArgs) Handles btnStartPrinting.Click

    mobjNovaOptios.SetActiveProfile(CType((cmbProfiles.SelectedItem),
String))
    mobjNovaOptios.SetDefaultPrinter()
    mobjNovaOptios.LicenseShellExecuteFile(txtFileToConvert.Text)
    Dim myProcess As Process = New Process
    Try
        myProcess.StartInfo.FileName = txtFileToConvert.Text
        myProcess.StartInfo.Verb = "Print"
        myProcess.StartInfo.CreateNoWindow = True
        myProcess.StartInfo.WindowStyle = ProcessWindowStyle.Hidden
        myProcess.Start()
    Catch ex As Win32Exception
        If ex.NativeErrorCode = ERROR_FILE_NOT_FOUND Then
            Console.WriteLine(ex.Message + ". Check the path and
filename")
        Else
            ' Note that if your word processor might generate
exceptions
            ' such as this, which are handled first.
            If ex.NativeErrorCode = ERROR_ACCESS_DENIED Then
                Console.WriteLine(ex.Message + ". You do not have
permission to print this file.")
            End If
        End If
    End Try
    myProcess.WaitForExit(10000)
    myProcess.Close()
    mobjNovaOptios.RestoreDefaultPrinter()
End Sub

```

1.5.9.3 Word OLE VBNet

The **Word OLE VBNet** sample is a simple Windows console application that converts a MS Word document (C:\Test.doc) to PDF using Word OLE automation.

Source code

```

Imports System
Imports System.Drawing

```

```

Imports System.Drawing.Printing
Imports System.Windows.Forms
Imports novapiLib80

Module Module1
    ' <summary>
    ' The main entry point for the application.
    ' </summary>
    Const PRINTER_NAME As String = "novaPDF SDK 9"
    Const PROFILE_NAME As String = "Word OLE VBNet"
    Const PROFILE_IS_PUBLIC As Integer = 0
    Const NOVAPDF_INFO_SUBJECT As Integer = 68

    Sub Main()

        ' create the NovaPdfOptions80 object
        Dim pNova As NovaPdfOptions9
        pNova = New NovaPdfOptions9
        Dim activeProfile As String = ""
        Dim newProfileID As String = String.Empty

        ' initialize the NovaPdfOptions90 object
        ' if you have an application license for novaPDF SDK,
        pNova.Initialize(PRINTER_NAME, "")
        ' save old active profile id
        pNova.GetActiveProfile(activeProfile)
        ' create new profile
        pNova.AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC, newProfileID)
        'load the new profile
        pNova.LoadProfile(newProfileID)
        'and set some options
        pNova.SetOptionString(NOVAPDF_INFO_SUBJECT, "C# Word OLE
document")
        pNova.SaveProfile()
        'set the copy profile as active profile ...
        pNova.SetActiveProfile(newProfileID)
        'set nova default printer
        pNova.SetDefaultPrinter()
        ' print word document
        Dim objWord As Object
        Dim objDoc As Object
        pNova.InitializeOLEUsage("Word.Application")
        objWord = CreateObject("Word.Application")
        pNova.LicenseOLEServer()
        objDoc = objWord.Documents.Open("C:\temp\test.docx", False,
True)

        objDoc.PrintOut(False)
        objDoc.Close(False)
        objWord.Quit(False)

        ' restore active profile
        If activeProfile.Length > 0 AndAlso

```

```

activeProfile.CompareTo(PROFILE_NAME) <> 0 Then
    pNova.SetActiveProfile(activeProfile)
    pNova.DeleteProfile(newProfileID)
End If

' restore default printer
pNova.RestoreDefaultPrinter()
End Sub
End Module

```

1.5.9.4 Convert Office Docs

The **Convert Office Docs** sample is a simple Windows console application that converts some Microsoft Office documents (Word, Excel, Publisher, PowerPoint and Visio) using Convert... functions. It uses Office OLE automation so Microsoft Office has to be installed.

The sample documents converted are located in the "OfficeDocuments" folder in novaPDF SDK installation folder. The pdf files are saved in the same folder.

Hidden links and internal document links are converted in pdf hyperlinks (except for Excel documents).

Source code

```

Imports System
Imports System.Windows.Forms
' the novapiLib package must be added as a COM reference
Imports novapiLib9

Module Module1
    ' <summary>
    ' The main entry point for the application.
    ' </summary>
    Const PRINTER_NAME As String = "novaPDF SDK 9"
    Const PROFILE_NAME As String = "ConvertOffice"
    Const PROFILE_IS_PUBLIC As Integer = 0
    Const NV_PROFILE_EXISTS As Long = -707133434

    Sub Main()
        Try
            ' create the NovaPdfOptions object
            Dim pNova As NovaPdfOptions9
            pNova = New NovaPdfOptions9
            ' initialize the NovaPdfOptions object
            ' if you have an application license for novaPDF SDK,
            ' pass the license key to the Initialize() function
            pNova.Initialize(PRINTER_NAME, "")
            ' mark start changing options
            ' get the active profile ...
            Dim activeProfile As String = ""
            Dim nActivePublic As Integer = 0
        Try

```



```

        pNova.GetActiveProfile(activeProfile)
    Catch ex As System.Runtime.InteropServices.COMException
        ' ignore profile exists error
        If (NovaErrors.NV_NO_ACTIVE_PROFILE = ex.ErrorCode) Then
            System.Console.WriteLine("The printer does not have
an active profile")
        Else
            'more serious error, propagate it
            Throw ex
        End If
    End Try

    Dim newProfileID As String = ""
    Try
        ' and make a copy of it
        pNova.AddProfile(PROFILE_NAME, PROFILE_IS_PUBLIC,
newProfileID)
    Catch e As System.Runtime.InteropServices.COMException
        ' ignore profile exists error
        If (NV_PROFILE_EXISTS = e.ErrorCode) Then
            System.Console.WriteLine("Profile already exists")
        Else
            ' more serious error, propagate it
            Throw e
        End If
    End Try

    'load the new profile
    pNova.LoadProfile(newProfileID)
    'nova.NovaTools.AddProfileOptions(pNova);

    ' and set some options
    ' uncomment the function calls for the options you wish to set

    ' DO NOT OPEN PDF
    ' an Open action is added by default in the profile - delete or
disable this open action
    ' pNova.DisableActionType(ActionType.NOVA_ACTION_OPEN)

    ' change the sav options
    NovaTools.AddSaveOptions(pNova)

    'save the new added profile
    pNova.SaveProfile()
    ' set the copy profile as active profile ...
    pNova.SetActiveProfile(newProfileID)

    'Path for novaPDF 9 SDK sample documents
    Dim strDocumentsPath As String =
"C:\Users\Public\Documents\novaPDF 9\SDK\OfficeDocuments\"
    Dim strDocPath As String

```

```

' -----
' Convert Word document
' Microsoft Office Word has to be installed
' -----
'Document file path
strDocPath = strDocumentsPath + "Word.docx"
'style name | level | type
Dim strHeadings As String = "Heading 1|1|0;Heading
2|2|0;Heading 3|3|0"
pNova.LicenseApplication("WINWORD.EXE")
pNova.LicenseApplication("SPLWOW64.EXE")
pNova.ConvertWordDocument(strDocPath, 1, 0, 1, 1, 1, 1, 1, 1,
1, 3, strHeadings)

' -----
' Convert PowerPoint document
' Microsoft Office PowerPoint has to be installed
' -----
'Document file path
strDocPath = strDocumentsPath + "PowerPoint.pptx"
pNova.LicenseApplication("POWERPNT.EXE")
pNova.LicenseApplication("SPLWOW64.EXE")
pNova.ConvertPowerPointDocument(strDocPath, 1, 1, 1, 1, 1, 1)

' -----
' Convert Publisher document
' Microsoft Office Publisher has to be installed
' -----
'Document file path
strDocPath = strDocumentsPath + "Publisher.pub"
pNova.LicenseApplication("MSPUB.EXE")
pNova.LicenseApplication("SPLWOW64.EXE")
pNova.ConvertPublisherDocument(strDocPath, 1, 1, 1, 1, 1, 1)

' -----
' Convert Excel document
' Microsoft Office Excel has to be installed
' hidden links in Excel documents will not be converted to pdf
links
' -----
'Document file path
strDocPath = strDocumentsPath + "Excel.xlsx"
pNova.LicenseApplication("EXCEL.EXE")
pNova.LicenseApplication("SPLWOW64.EXE")
pNova.ConvertExcelDocument(strDocPath, 1)

' -----
' Convert Visio document
' Microsoft Office Visio has to be installed
' -----
'Document file path
strDocPath = strDocumentsPath + "Visio.vsd"
pNova.LicenseApplication("VISIO.EXE")

```

```

pNova.LicenseApplication("SPLWOW64.EXE")
pNova.ConvertVisioDocument(strDocPath, 1, 1, 1, 1, 1)

pNova.SetActiveProfile(activeProfile)
pNova.DeleteProfile(newProfileID)
Catch e As System.Runtime.InteropServices.COMException
    MessageBox.Show(e.Message)
Catch e As Exception
    MessageBox.Show(e.Message)
End Try
End Sub
End Module

```

1.5.9.5 Override Options

Override Options sample is a simple Windows console application that demonstrates the basic use of the INovaPDFOptions interface, without using profiles options. Instead of creating a profile and setting options in the profile, the sample uses SetOverrideOptions... functions to quickly set some options that will overwrite active profile settings. This is useful if you have a simple application where you just wish to change the pdf file name, email address or other simple options for each printed document.

There is a limited set of options that can be set with SetOverrideOptions... functions, usually settings that users can also change from the Save As dialog or the other prompt dialogs that can be shown before printing a document. If you need more complex settings, like adding a watermark, overlay or signature you have to configure them in a profile.

You can combine usage of profiles and override options functions. For instance you can create a profile with a watermark that is set as active and then use the override function just to change the file name for each document.

Once set, override options are taken in account for all printed documents until they are removed with DeleteOverrideOptions function.

The sample prints one page with a simple text to the novaPDF SDK 10 and generates a "OverrideOptions.pdf" file in the C:\temp folder.

Source code

```

Imports System
Imports System.Drawing
Imports System.Drawing.Printing
Imports System.Windows.Forms
' the novapiLib package must be added as a COM reference
Imports novapiLib9

Module Module1
    '
    ' <summary>
    '     The main entry point for the application.
    ' </summary>

```

```
Const PRINTER_NAME As String = "novaPDF SDK 9"
Const PDF_FILE_NAME As String = "OverrideOptions.pdf"

Sub Main()
    Try
        ' create the NovaPdfOptions object
        Dim pNova As NovaPdfOptions9
        pNova = New NovaPdfOptions9

        ' initialize the NovaPdfOptions object
        ' if you have an application license for novaPDF SDK,
        ' pass the license key to the Initialize() function
        pNova.Initialize(PRINTER_NAME, "")

        'Override options from active profile

        'Save options
        'do not show prompt save dialog

        pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_SAVE_TYPE,
        SaveDlgType.PROMPT_SAVE_NONE)
            'save the pdf in next folder

        pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_SAVE_FOLDER_TYPE,
        SaveFolder.SAVEFOLDER_CUSTOM)

        pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_SAVE_FOLDER,
        "C:\\temp")

        pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_SAVE_FILE,
        PDF_FILE_NAME)
            'access folder, if restricted

        pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_SAVE_US
        ER, "user")

        pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_SAVE_PA
        SSWORD, "password")
            'if a file with the same neme already exists

        pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_SAVE_CONFLICT,
        SaveFileConflictType.FILE_CONFLICT_STRATEGY_OVERWRITE)

            'disable open PDF in viewer

        'pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_OPEN_VIEWER, 0)

        'Embed fonts

        pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_EMBEDFONTS, 1)

        'Set compression level
```

```
'pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_COMPRESSION,
CompressionOverride.COMPRESSION_HIGHPQUALITY)

    'Merge PDF
    'Enable merge

'pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_MERGE_PDF, 1)
    'Merge with the same file, if the file exists in
destination OR merge with another file

'pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_MERGE_FILE_TYPE,
MergeFile.MERGE_FILE_OTHER)
    'Append to existing PDF, insert at the beginning or
insert at a page number

'pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_MERGE_TYPE,
MergeType.MERGE_TYPE_APPEND)
    'if merge with other file, specify file name (and path)

'pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_MERGE_FILE,
"invoice-text.pdf")
    'if merge type is set to insert at page number

'pNova.SetOverrideOptionLong(NovaOptions.NOVAPDF_OVERRIDE_INSERT_PAGENO, 1)
    'if the existing PDF is encrypted

'pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_PDF_PA
SSWORD, "password")

    'Document info

pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_DOC_INFO, 1)

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_DOC_TITLE, "sdk
title")

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_DOC_SUBJECT,
"sdk subject")

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_DOC_AUTHOR, "sdk
author")

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_DOC_KEY, "sdk
key")

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_DOC_CREATOR,
"sdk creator")

    'Encrypt PDF

'pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_SECURITY, 1)
```

```

'pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_SECURITY_U, "user")

'pNova.SetOverrideOptionEncryptedString(NovaOptions.NOVAPDF_OVERRIDE_SECURITY_O, "owner")

'Email

pNova.SetOverrideOptionBool(NovaOptions.NOVAPDF_OVERRIDE_SEND_EMAIL, 1)

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_REC_TO, "to")

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_REC_FROM, "from"
)

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_REC_CC, "cc")

pNova.SetOverrideOptionString(NovaOptions.NOVAPDF_OVERRIDE_REC_BCC, "bcc")

pNova.RegisterNovaEvent(NovaEvents.NOVAPDF_EVENT_ACTIONS)

' print a test page
Dim pd As PrintDocument = New PrintDocument
pd.PrinterSettings.PrinterName = PRINTER_NAME
AddHandler pd.PrintPage, AddressOf PrintPageFunction
pd.Print()

Dim bTimeout As Integer
pNova.WaitForNovaEvent(120000, bTimeout)

Catch e As System.Runtime.InteropServices.COMException
    MessageBox.Show(e.Message)
Catch e As Exception
    MessageBox.Show(e.Message)
End Try
End Sub

' and finally the function that actually prints the page
Private Sub PrintPageFunction(ByVal sender As Object, ByVal ev As
PrintPageEventArgs)
    Dim str As String = "novaPDF says Hello World from VB.Net"
    Dim font As Font = New Font("Arial", 16)
    Dim brush As Brush = New SolidBrush(Color.Black)
    ev.Graphics.DrawString(str, font, brush, 20.0!, 20.0!)
    ev.HasMorePages = False
End Sub

End Module

```

1.5.10 Install

1.5.10.1 Installation package bundle

This is a sample on how to compress the msi installations packages in a bundle and generate an setup executable to install novaPDF 10 SDK Developer.

If you haven't already done so, you will need to install the Wix Toolset to build this project.

The project contains two files:

1. Variables.wxi - contains variables for application name, company name, version,...; **it's important to change the UpgradeCode to an unique new GUID for your application**
2. Bundle.wxs - contains the msi files that need to be included and the execution order; **.Net Framework 4 is required by novaPDF 10 SDK Developer and is set as prerequisite**

Variables.wxi

```
<?xml version="1.0" encoding="utf-8"?>
<Include>

  <?define BundleName="My SDK Application Bundle"?>
  <!--change the UpgradeCode to an unique new GUID for your application-->
  <?define UpgradeCode="C08317E3-A50E-4D51-802A-92EE332821AD"?>

  <?define AboutUrl='http://www.novapdf.com'?>
  <?define SplashImage=" "?>
  <?define IconFile=" "?>

  <?define MyLicenseFileName="C:\ProgramData\Softland\novaPDF
9\nPdfSdk9_Softland\nPdfSdk9_SoftlandEulaExt.rtf" ?>

  <!--version-->
  <?define MajorVersion="9"?>
  <?define MinorVersion="0"?>
  <?define BuildNumber="36"?>

  <!--manufacturing-->
  <?define Manufacturer="<My SDK Company Name>" ?>

  <!--product name-->
  <?define ProductName="<My SDK Application Name>"?>

  <!--full product name-->
  <?define FullProductName="$(var.ProductName) $(var.MajorVersion)" ?>

  <!--bundle specific-->
  <?define DriverKit86="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9PrinterDriver(x86).msi"?>
  <?define DriverKit64="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9PrinterDriver(x64).msi"?>

  <?define COMPathx64="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9COM(x64).msi"?>
  <?define COMPathx86="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9COM(x86).msi"?>
```

```

    <?define OemKit86="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9SDK(x86).msi">
    <?define OemKit64="C:\Users\Public\Documents\novaPDF
9\SDK\Branding\novaPDF9SDK(x64).msi">

</Include>

```

Bundle.wxs

```

<?xml version="1.0" encoding="UTF-8">
<Wix xmlns="http://schemas.microsoft.com/wix/2006/wi"
    xmlns:util="http://schemas.microsoft.com/wix/UtilExtension"
    xmlns:bal="http://schemas.microsoft.com/wix/BalExtension"
    xmlns:swid="http://schemas.microsoft.com/wix/TagExtension"
    xmlns:dotNet="http://schemas.microsoft.com/wix/NetFxExtension">

    <?include "Variables.wxi">
    <Bundle Name="$(var.BundleName)"
        Version="$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber).0"
        Manufacturer="$(var.Manufacturer)"
        UpgradeCode="$(var.UpgradeCode)"
        AboutUrl='$(var.AboutUrl)'
        SplashScreenSourceFile='$(var.SplashImage)'
        Compressed='yes'
        IconSourceFile="$(var.IconFile)" >

        <swid:Tag Regid="regid.2008-09.org.wixtoolset" />

        <!--change the UpgradeCode to a unique new GUID for your application-->
        <RelatedBundle Id="$(var.UpgradeCode)" Action="Upgrade"/>

        <!--application license-->
        <BootstrapperApplicationRef Id="WixStandardBootstrapperApplication.RtfLicense" >
            <bal:WixStandardBootstrapperApplication LicenseFile="$(var.MyLicenseFileName)"
                SuppressOptionsUI="yes"/>
        </BootstrapperApplicationRef>

        <Chain>
            <!--prereqs-->
            <PackageGroupRef Id="NetFx40Web"/>

            <!--COM-->
            <MsiPackage Id="COMx86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)
" Cache="yes"
                CacheId="
COMIdx86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" DisplayInternalUI=
"no"
                EnableFeatureSelection="no" ForcePerMachine="yes"
                Compressed="yes" SourceFile="$(var.COMPathx86)" Visible="yes" Vital="
yes">
            </MsiPackage>

            <MsiPackage Id="COMx64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)
" Cache="yes"

```



```

        CacheId="
COMIdx64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" DisplayInternalUI=
"no"
        EnableFeatureSelection="no" ForcePerMachine="yes"
        Compressed="yes" SourceFile="$(var.COMPathx64)" Visible="yes" Vital=
"yes" InstallCondition="VersionNT64">
    </MsiPackage>

    <!--driver-->
    <MsiPackage Id="
DriverPackagex86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="
yes"
        CacheId="
DriverPackageIdx86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
        EnableFeatureSelection="yes" ForcePerMachine="yes"
        Compressed="yes" SourceFile="$(var.DriverKit86)" Visible="yes" Vital=
="yes" InstallCondition="NOT VersionNT64">

    </MsiPackage>

    <MsiPackage Id="
DriverPackagex64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="
yes"
        CacheId="
DriverPackageIdx64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
        EnableFeatureSelection="yes" ForcePerMachine="yes"
        Compressed="yes" SourceFile="$(var.DriverKit64)" Visible="yes" Vital=
="yes" InstallCondition="VersionNT64">
    </MsiPackage>

    <!--oem product-->
    <MsiPackage Id="
OemPackagex86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="yes"
        CacheId="
OemPackageIdx86$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
        EnableFeatureSelection="no" ForcePerMachine="yes"
        Compressed="yes" SourceFile="$(var.OemKit86)" Visible="no" Vital="
yes" InstallCondition="NOT VersionNT64">

    </MsiPackage>

    <MsiPackage Id="
OemPackagex64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)" Cache="yes"
        CacheId="
OemPackageIdx64$(var.MajorVersion).$(var.MinorVersion).$(var.BuildNumber)"
DisplayInternalUI="no"
        EnableFeatureSelection="no" ForcePerMachine="yes"
        Compressed="yes" SourceFile="$(var.OemKit64)" Visible="no" Vital="
yes" InstallCondition="VersionNT64">
    </MsiPackage>

</Chain>
</Bundle>

```

```
<Fragment>
  <!--UI-->
  <UI Id="MyWixUI_Mondo">
    <UIRef Id="WixUI_Mondo"/>
    <UIRef Id="WixUI_ErrorProgressText"/>
  </UI>
</Fragment>

</Wix>
```

Index

- A -

Addbookmarkdefinition 69
Addbookmarkdefinition2 71
Addprofile 79
Addprofile2 80
AddWatermarkImage 83
AddWatermarkImage2 83
AddWatermarkText 84
AddWatermarkText2 85
asp 224
asp.net 224

- C -

Choose sample 221
Components 12
Copyprofile 95
Copyprofile2 95
CSharp converter 246

- D -

Deletebookmarkdefinition 97
Deleteprofile 101
Deleteprofile2 101
DeleteWatermarkImage 102
DeleteWatermarkImage2 103
DeleteWatermarkText 103
DeleteWatermarkText2 103

- G -

Getactiveprofile 117
Getactiveprofile2 117
Getbookmarkdefinition 118
Getbookmarkdefinition2 119
Getbookmarkdefinitioncount 120
Getfirstprofile 123
Getfirstprofile2 124
Getnextprofile 133
Getnextprofile2 134

Getoptionlong 136
Getoptionstring 136
Getoptionstring2 137
Getpdffilename 148
GetWatermarkImage 154
GetWatermarkImage2 155
GetWatermarkImageCount 155
GetWatermarkText 167
GetWatermarkText2 167
GetWatermarkTextCount 168

- H -

hello world 224, 259, 285
Hello World CSharp 243
Hello World Delphi 231
Hello World VB 296
Hellow World network 262
Hellow World VBNet 306

- I -

Initialize 168
Initialize2 169
Initializeoleusage 169
InitializeSilent 169
InitializeSilent2 170
INovaPdfOptions 62
Install
 Command line 11
 Network 11
Integrate 16

- J -

java 285, 290
java sample 285, 290

- L -

LicenseApplication 170
Licenseoleserver 171
Licenseshellexecute file 171

- M -

Make the release build 16
MFC Converter 266
MFC Scribble 270
Modifybookmarkdefinition 172
Modifybookmarkdefinition2 173

- N -

Network auto-install 14

- O -

ole 290

- P -

PDF reports 222
Private/Public Profiles 29

- R -

Register COM 27
Register messages 29
Registereventwindow 175
RegisterNovaEvent 175
RegisterNovaEvent2 175
Registry Keys 33
Restoredefaultprinter 176

- S -

Set printer options 28
Setactiveprofile 183
Setactiveprofile2 183
Setdefaultprinter 184
Setoptionlong 192
Setoptionstring 193
Setoptionstring2 194
SetPrinterOption 204
System requirements 12

- T -

Terminal services 11

- U -

Uninstall 11
Unregistereventwindow 220
Use COM 28
Use Events 30

- V -

VB converter 298
VCL converter 227

- W -

WaitForNovaEvent 220
Windows messages 60
word ole 290
Word OLE CSharp 249
Word OLE Delphi 237
Word OLE VB 302